

Remote Control Center Professional version user manual for Android

INDEX

System Requirement	1
Google Play Download Link.....	1
System Setting.....	1
Home Screen	2
Scan Devices	2
Add Clients.....	2
Modify Host.....	4
Select Client Channel	6
Modify Client	7
Delete Client	8
Add Group.....	9
Select Group Channel.....	11
Modify Group	13
Add Client of Group	15
Delete Group.....	16
Add Scene	17
Apply Scene.....	19
Modify Scene	21
Delete Scene	22

Remote Control Center Professional version user manual for Android

System Requirement

APP name: Remote Control Center PRO



Android version 4 or later

Size: 1.2M

Google Play Download Link

<https://play.google.com/store/apps/details?id=sct.com.remotecontrolcenterpro>

Google Play Download QR code



System Setting

Before setting, you have to connect Host / Client / Ethernet Switch / Access Point (Wi-Fi router) together.

Mobile phone connect to the Wi-Fi and set the IP address same with the Host / Client.

System default IP setting is Auto IP, it will assign 169.254.X.X (subnet mask 255.255.0.0) to transmitters and receivers, you could also set to DHCP or Static IP, please refer to user manual web setting chapter: IP Setup.

There are three ways to get the IP address of receiver:


1. Use APP function: Scan Device to get the IP address.
2. Local IP shows on right bottom screen when booting.
3. Press remote control button[MENU] [1] [ENTER](IP Address)

There are two ways to get the IP address of transmitter:

1. Use APP function: Scan Device to get the IP address.
2. Connect a transmitter and receiver and set in the same Channel, press remote control button [MENU] [1] [ENTER] at receiver side (Host IP Address), it will shows the transmitter IP Address on screen(must remove the HDMI cable of transmitter or turn off the video source).

Remote Control Center Professional version user manual for Android

Home Screen

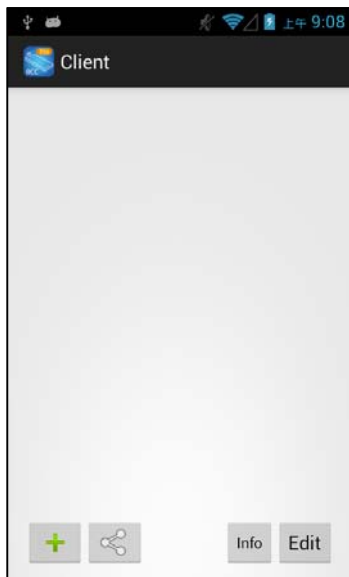

When first time enter the APP will see the Client page


Bottom left 「+」 to add client

Bottom left (share)icon to enter Group/Scene mode selection page

Bottom right 「Info」 to enter Information page

Bottom right 「Edit」 to delete client


Scan Devices

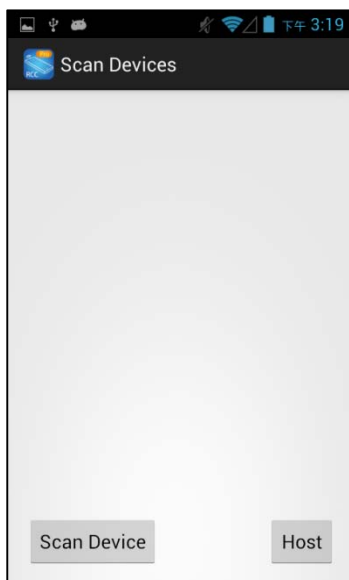

Touch top left 「+」 to enter Scan Devices page

Touch bottom left 「Scan Device」 to scan connected clients

Add Clients

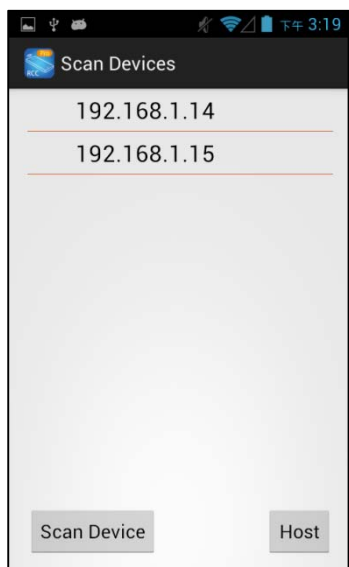

After scan it will show all Clients in the list

Host will be add to bottom right Host page

Touch listed IP address to enter Add Device page to add Client

Remote Control Center Professional version user manual for Android



Enter the device Name you prefer and IP address

Notice: Name and IP should be unique, not allow duplicate


Touch 「 Add Device 」 button to finish setting.




Return to home screen will see the 「 + 」 sign in front of the added device

Remote Control Center Professional version user manual for Android


Modify Host

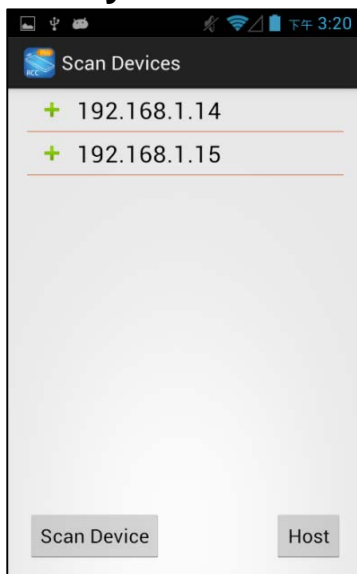

Touch bottom right 「Host」 to enter Host setting page

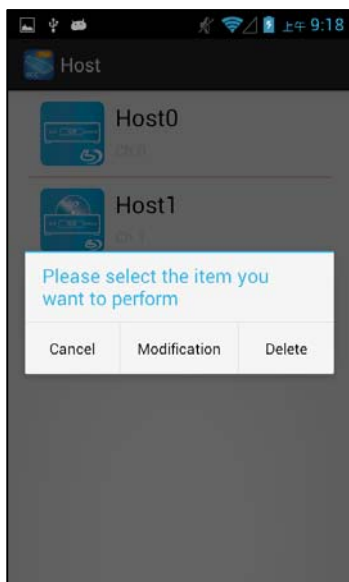

Press Host name to show pop-up dialog, touch 「Modification」

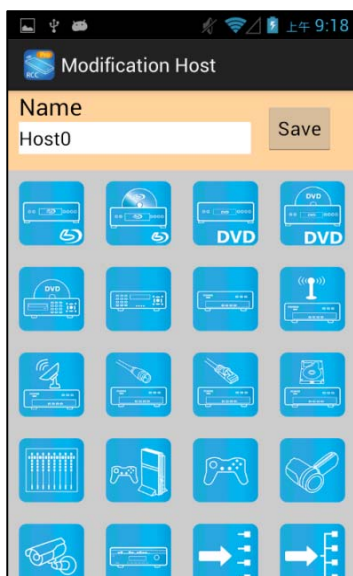


Touch Name column to change name

Touch icon to select different icon

Touch top right 「Save」 to finish setting


Remote Control Center Professional version user manual for Android

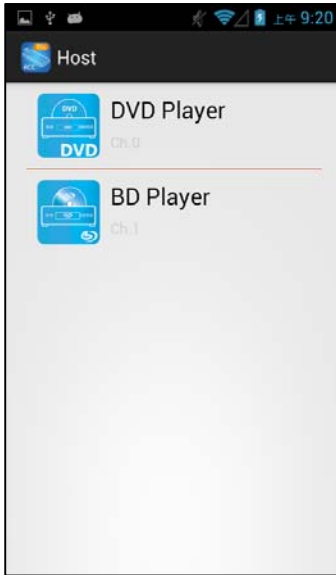

Return to Host page will see the device which just changed

Remote Control Center Professional version user manual for Android

Select Client Channel

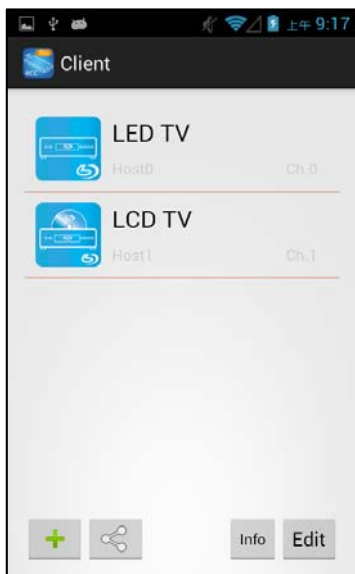

Left icon: Icon for host

Center: Upper big font for client, lower small font for host

Notice: if shows 「Specify the host does not exist」 means the host not exist


Right Ch.: Number of host channel, e.g.: Channel2 will show 「Ch.2」

Right gear: Modify the client name

Touch host name to enter Select Host page



In Select Host page it will list all register hosts for selection

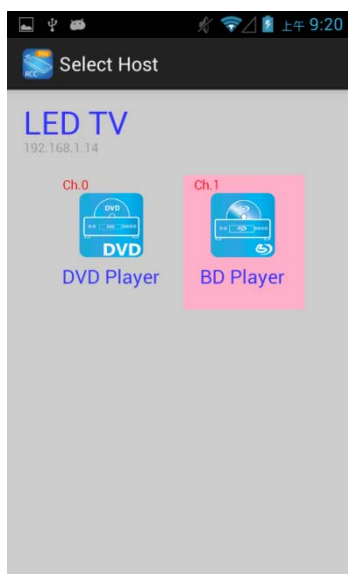


Touch the Host bar to select


The selected channel will be high light and switch the screen immediately

Remote Control Center Professional version user manual for Android


Modify Client

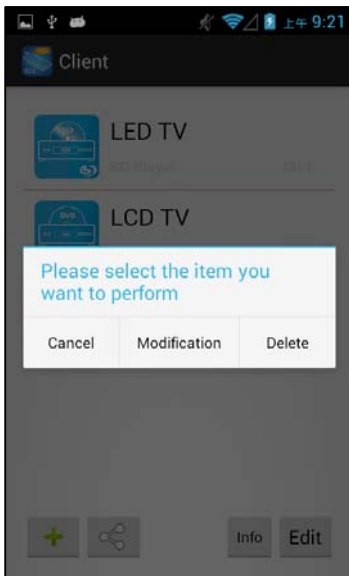

Press client name at to show pop-up dialog, touch 「Modification」

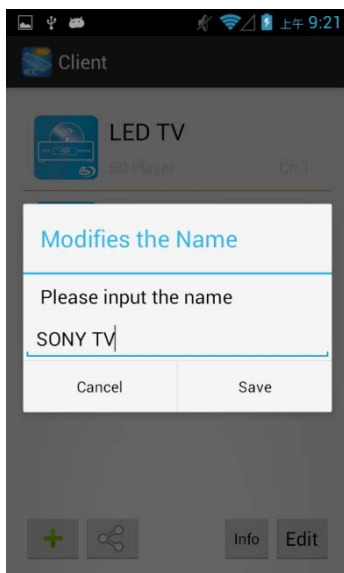


Enter the name in pop-up dialog, touch 「Save」 to finish

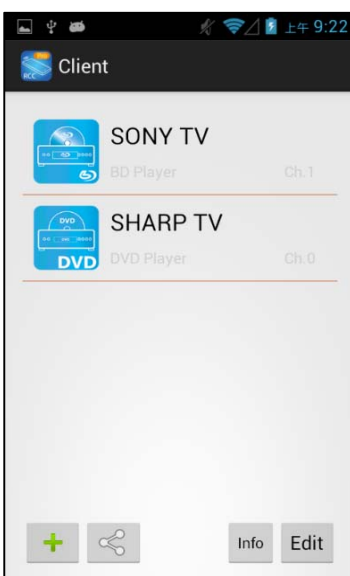


Return to home screen will see the device which just changed

Remote Control Center Professional version user manual for Android


Delete Client

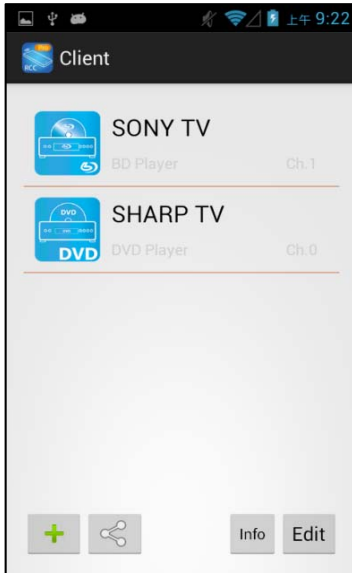

Press Client name to show pop-up dialog

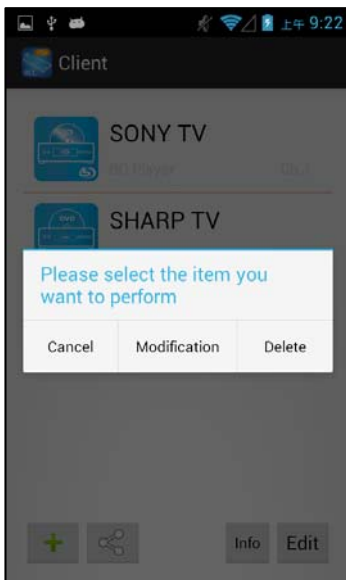

Touch 「Delete」 to pop-up dialog

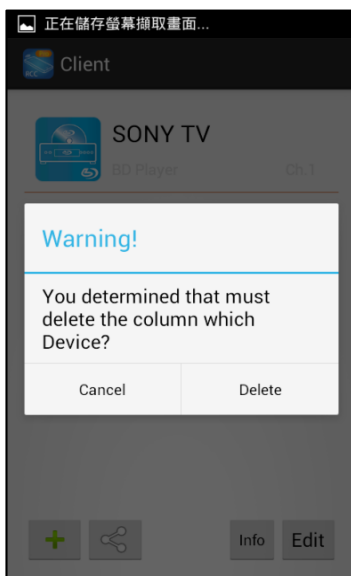


Touch 「Delete」 of pop-up dialog to confirm delete

Remote Control Center Professional version user manual for Android


Add Group



Touch the top right 「Edit」 at Client page to enable select function

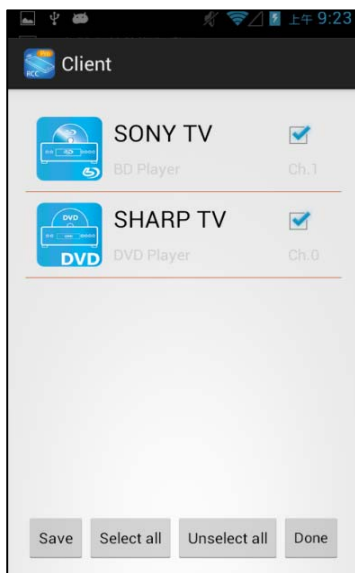


Check the client then touch the bottom left 「Save」 to show pop-up dialog

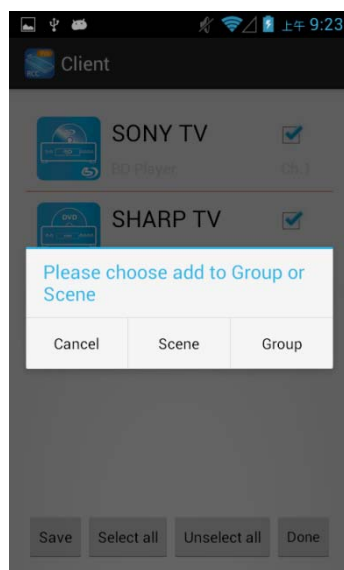

Touch 「Group」 to pop-up dialog

Remote Control Center Professional version user manual for Android

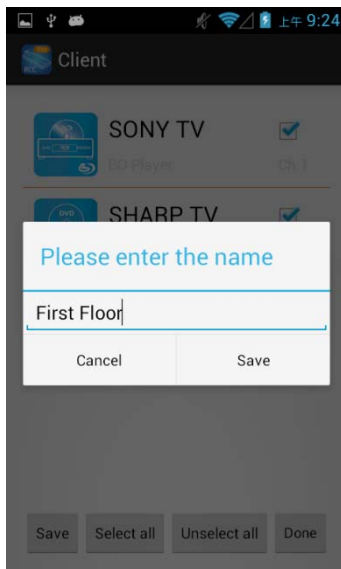

Enter the group name you prefer then touch 「Group」 to save

Notice: Group name could not be empty or duplicate


Touch top right 「Done」 to disable select function

Remote Control Center Professional version user manual for Android


Select Group Channel



Touch bottom left  (share) icon to enter Group/Scene mode selection page

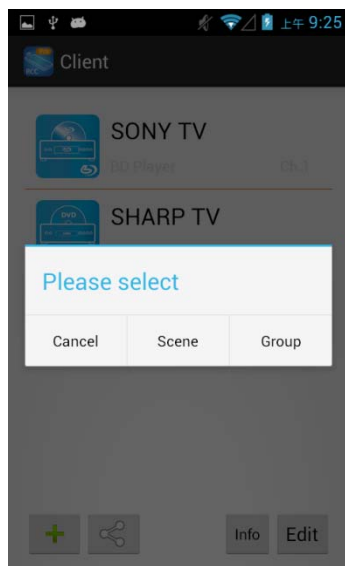

Tough pop-up dialog 「Group」 to enter group channel selection

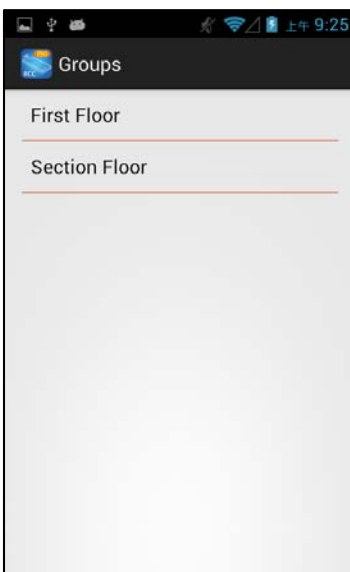

Touch group name enter Select Host page

Remote Control Center Professional version user manual for Android



Yellow area shows the devices of group

Gray area shows the available channels




Touch the Host bar to select


The selected channel will be high light and switch the screen immediately

Remote Control Center Professional version user manual for Android


Modify Group

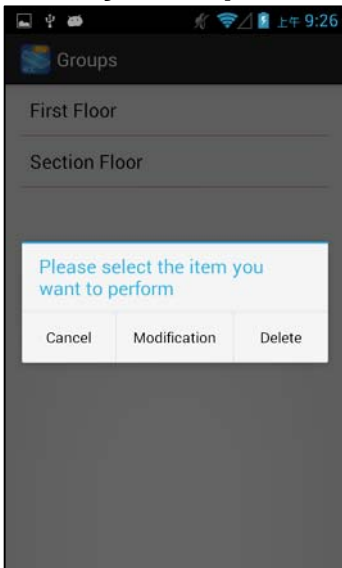


In Group page press group name to show pop-up dialog, touch 「Modification」 to enter modify mode

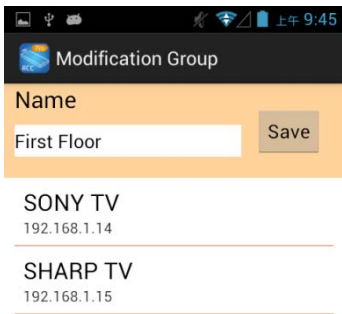


Touch Name column to change group name

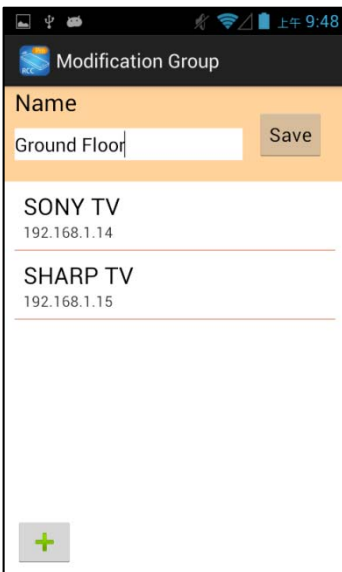

Remote Control Center Professional version user manual for Android

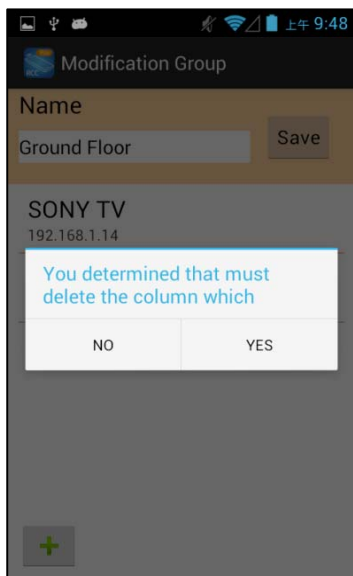


Press the client name to show pop-up dialog, touch 「Yes」 to show delete dialog

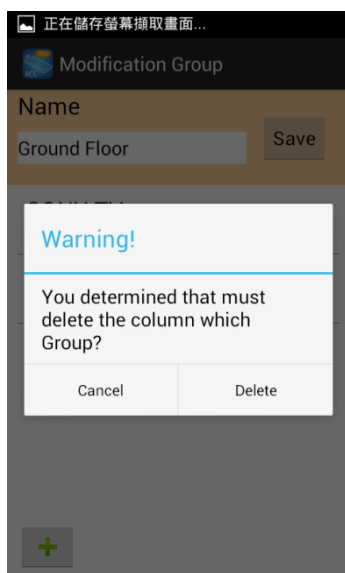

Touch 「Delete」 to delete the client

Remote Control Center Professional version user manual for Android


Add Client of Group

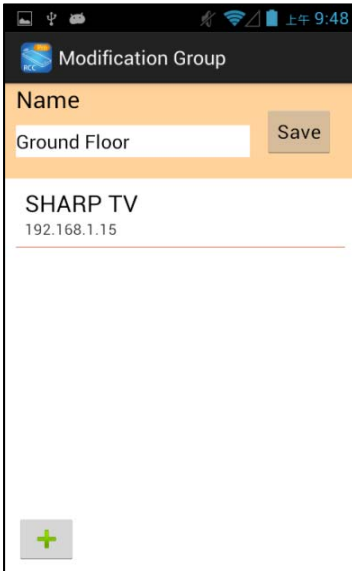

Touch bottom left 「+」 in Modify Group page to add client




Check the client then touch top right 「Add」, it will return to Modify Group page

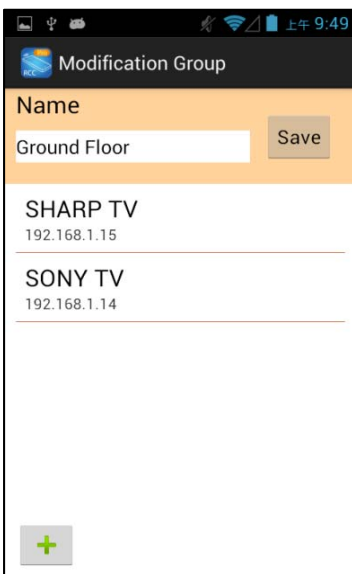


Return to Modify Group page will see the device which just add
Touch 「Save」 to save the modification

Remote Control Center Professional version user manual for Android


Delete Group

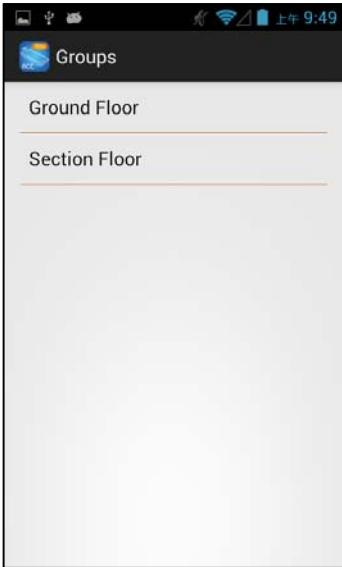

Press group name to show pop- up dialog

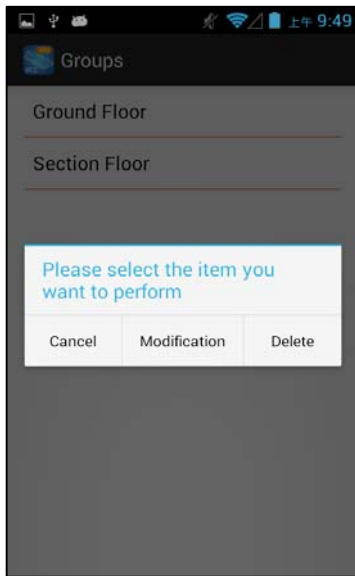


Touch 「Delete」

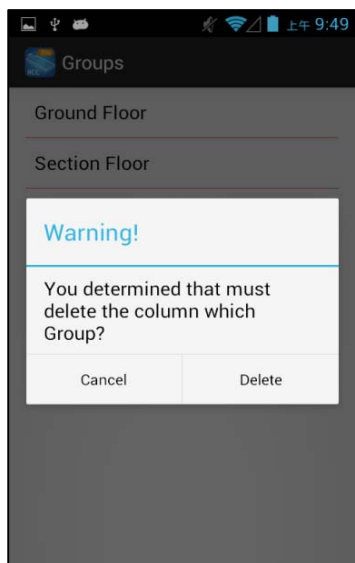


Touch 「Delete」 button to delete the group
Touch top right 「Done」 to exit

Remote Control Center Professional version user manual for Android

Add Scene

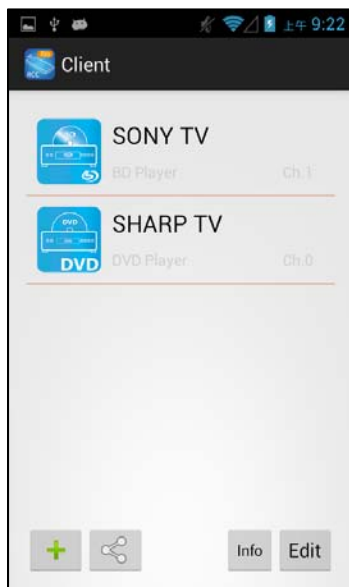


Touch the bottom right 「Edit」 at Client page to enable select function

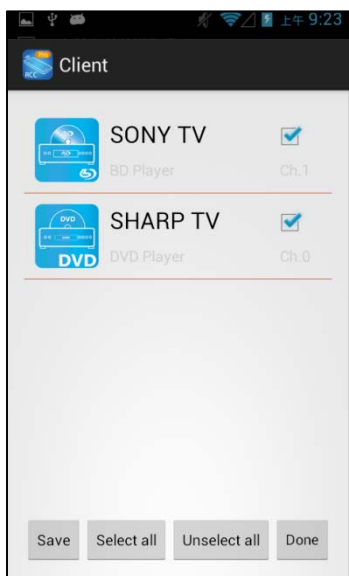


Check the client then touch the bottom center 「Save」

Notice: if shows「Specify the host does not exist」means the host not exist and not able to add the client to Scene

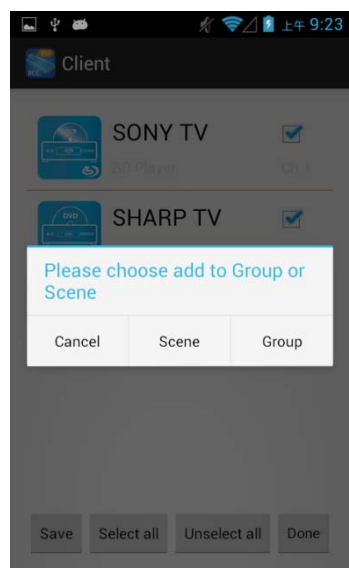

Touch 「Scene」 to pop-up dialog

Remote Control Center Professional version user manual for Android

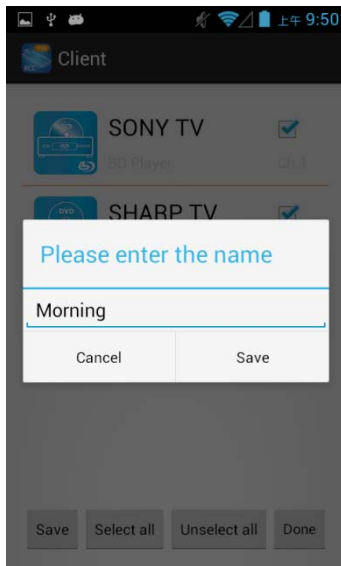


Enter the scene name you prefer then touch 「 Scene 」 to save

Notice: Scene name could not be empty or duplicate


Touch top right 「 Done 」 to disable select function

Remote Control Center Professional version user manual for Android


Apply Scene

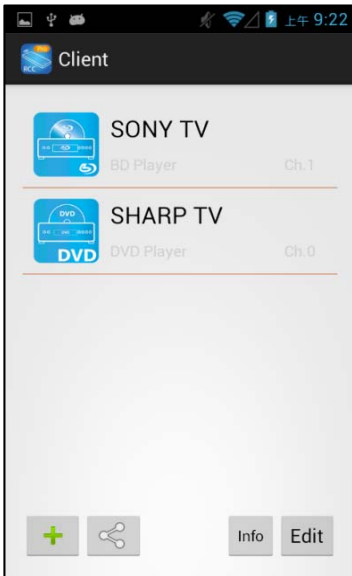

Touch bottom left  (share) icon to enter Group/Scene mode selection page

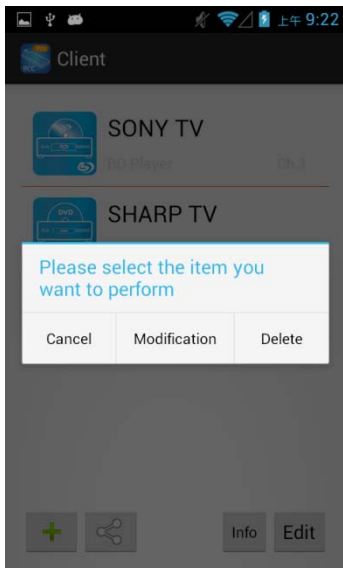


Touch 「Scene」 to enter scene mode

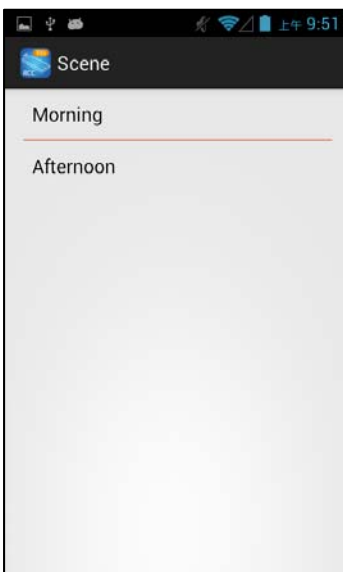

Touch the scene name to apply


Remote Control Center Professional version user manual for Android

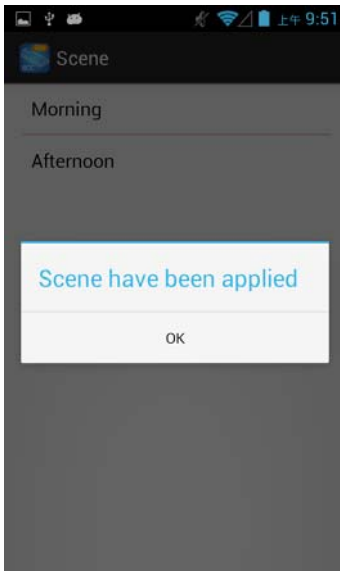


It will pop-up dialog 「 Scene have been applied 」

Remote Control Center Professional version user manual for Android


Modify Scene

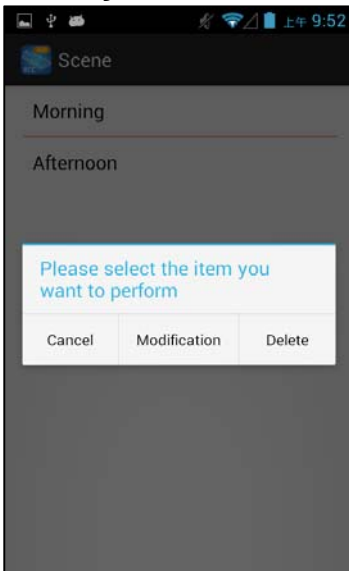

In Scene page press group name to show pop-up dialog, touch 「Modification」 to enter modify mode

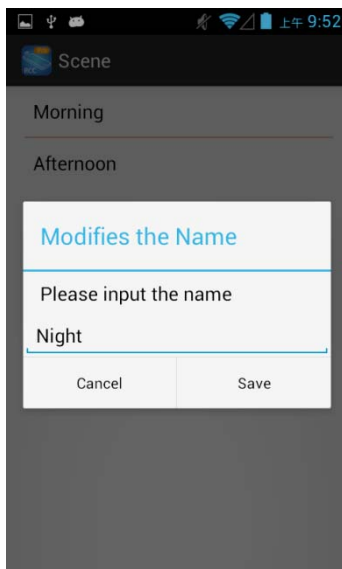


Enter new scene name in pop-up dialog then touch 「Save」

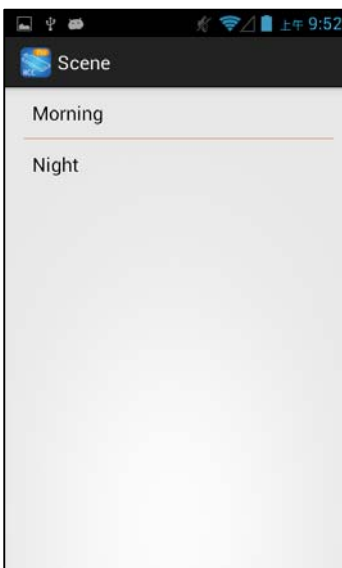


Return to Scene page will see the name which just changed

Remote Control Center Professional version user manual for Android


Delete Scene

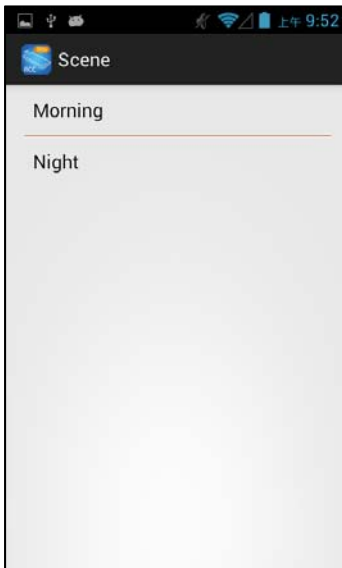

In Scene page press group name to show pop-up dialog

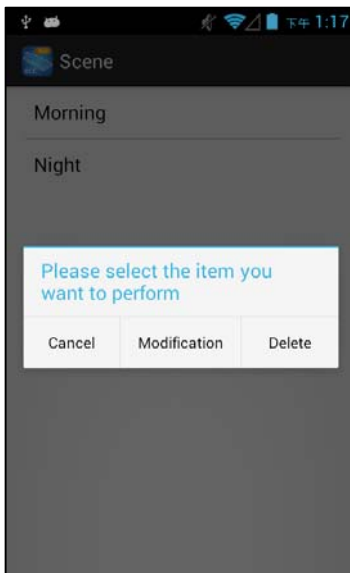

touch 「Delete」 to enter modify mode

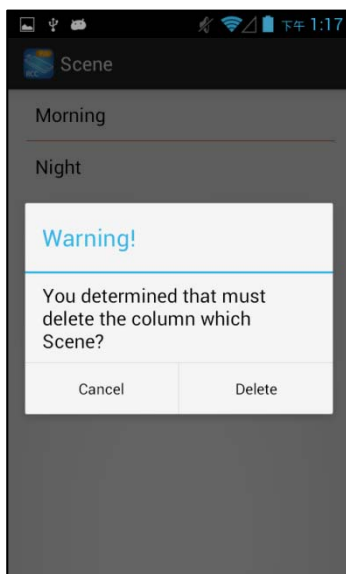

Touch 「Delete」 button to delete the scene
Touch top right 「Done」 to exit