


AC TO DC POWER CONVERTER

ITEM NO.: PC500, PC500S, PC1A




PC500 AC to DC 12V Power Converter 500mA

- I AC to DC12V Power Converter with DC plug cable 500mA Max.
- I Input power: AC15~26V; DC15~28V.
- I Output Power: DC12V regulated.
- I For DC type camera or video power sources convert using AC24V for professional CCTV Industry Installation.

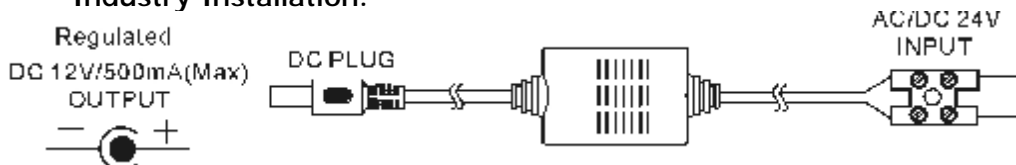


PC500S AC to DC 12V Power Converter 500mA Built in Surge Protection

- I Identical to PC500, but built in surge protection at power input.

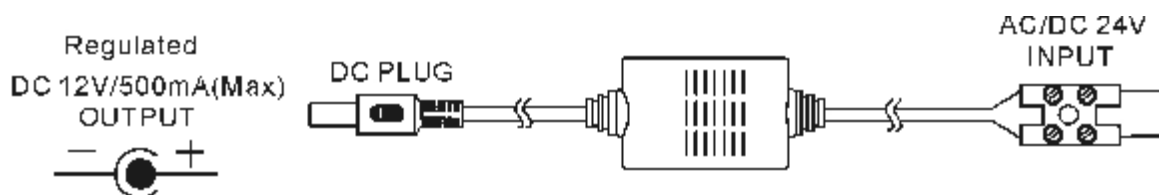

PC1A AC to DC 12V Power Converter 1000mA

- I Identical to PC500, but with 1000mA max.
- I Input power: AC18~26V; DC18~28V.
- I Output Power: DC12V regulated.

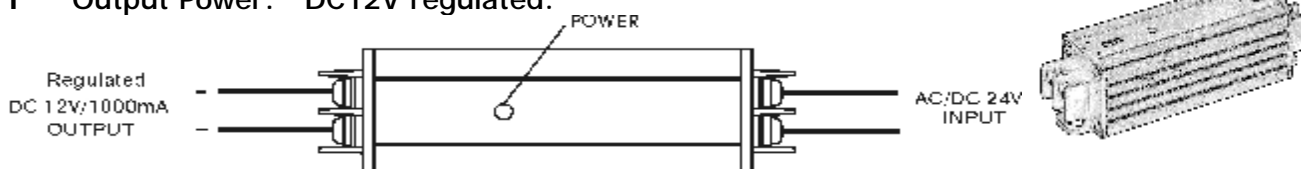

Specification:

ITEMS	PC500	PC500S
INPUT POWER	AC15~26V; DC15~28V	
OUTPUT POWER	DC12V Regulated	
OUTPUT CURRENT	500mA	
MATERIAL	ABS PLASTIC	
CABLE	Input side: 15cm, 22AWG, 2 Pin Terminal Block Output side: 15cm, 22AWG, DC Plug	
DIMENSIONS	mm	63X29X25 (Do not include cable and connector)
WEIGHT	g	35

ITEMS	PC1A
INPUT POWER	AC18~26V; DC18~28V
OUTPUT POWER	DC12V Regulated
OUTPUT CURRENT	1000mA (MAX)
MATERIAL	Metal
DIMENSIONS	mm
WEIGHT	g
	102.8X25.4X25.4
	80



Rev. B