



## Certificate of Conformity

The products

**EUT** : Video to VGA converter  
**Model No.** : AD001XXX

which produced by

**Smart Cabling & Transmission Corp.**  
**10F, No.493, Chung-Cheng Rd., Hsin Tien City, Taipei County, 231, Taiwan**

Has been tested by Electronics Testing Center, Taiwan ETC  
And was found to comply with the EMC requirements of Directive 2004/108/EC on the basis of

**EN 55022:2006/A1:2007(Class B)**  
**EN 61000-3-2:2006/A1:2009/A2:2009**  
**EN 61000-3-3:2008**

**EN 55024:1998/A1:2001/A2:2003**

*Will Yau*

Signature

Will Yauo

Manager of EMC Testing Department II  
Electronics Testing Center, Taiwan



Report Number : 11-02-RBF-095

Date of Issue: Jun. 17, 2011

- Note:
1. The results of the Test Report relate only to the items tested.
  2. The Test Report shall not be reproduced except in full, without the written approval of ETC.
  3. Together with the applicant's own documented production control, the applicant (or his European authorized representative) could draw up an EC Declaration of Conformity and affix the CE marking.
  4. EC Declaration of Conformity is the responsibility of the manufacturer/ importer.

ELECTRONICS TESTING CENTER, TAIWAN  
No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei  
City, Taiwan 24442, R.O.C.

TEL:(02)26023052  
INT:+886-2-26023052  
FAX:(02)26010910  
INT:+886-2-26010910



# *EMC*

## *TEST REPORT*

Responsible Party : *Smart Cabling & Transmission Corp.*

Manufacturer : *Smart Cabling & Transmission Corp.*

Description of Product : *Video to VGA converter*

Model No. : *AD001XXX*

Test Report File No. : *11-02-RBF-095*

Date Test Item : *Feb. 19, 2011*

Received

Date Test Campaign : *Jun. 11, 2011*

Completed

Date of Issue : *Jun. 17, 2011*

Test Performed by

ELECTRONICS TESTING CENTER (ETC) , TAIWAN

No.34, Lin 5, Dingfu Vil., Linkou Dist.,

New Taipei City, Taiwan 24442, R.O.C.

TEL : (02)26023052 FAX : (02)26010910

[http:// www.etc.org.tw](http://www.etc.org.tw) ; e-mail: [emc@etc.org.tw](mailto:emc@etc.org.tw)

This test report consists of 51 Pages. This test report is the property of ETC, and shall not be reproduced except in full, without the written consent of ETC. ETC hereby returns all rights-in-data to [**SMART CABLING & TRANSMISSION CORP.**] for their exclusive legal use.

Note : 1. The results of the Test Report relate only to the items tested.

2. The Test Report shall not be reproduced except in full , without the written approval of ETC.

## CONTENTS

●	EMC TEST REPORT.....	1
●	CONTENTS.....	2
<b>1</b>	<b>TEST REPORT CERTIFICATION.....</b>	<b>5</b>
<b>2</b>	<b>GENERAL INFORMATIONS .....</b>	<b>7</b>
2.1	Description of EUT.....	7
2.2	Related Information of EUT .....	7
2.3	Tested Configuration.....	7
2.4	Deviation Record .....	8
2.5	Measurement Uncertainty .....	8
2.6	Description of Test Mode.....	8
2.7	Modification Record .....	8
<b>3</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
3.1	Emissions .....	9
3.1.1	Conducted Emissions .....	9
3.1.2	Conducted Telecommunication ports.....	9
3.1.3	Radiated Emissions .....	9
3.1.4	Harmonics Current Emissions.....	10
3.1.5	Voltage Fluctuations and Flicker.....	10
3.2	Immunity.....	11
3.2.1	Immunity Criteria.....	11
3.2.2	Electrostatic Discharge Immunity.....	11
3.2.3	RF Radiated Fields Immunity .....	11
3.2.4	EFT/Burst Immunity .....	12
3.2.5	Surge Immunity.....	12
3.2.6	RF Common Mode Immunity.....	12
3.2.7	Power Frequency Magnetic Field Immunity.....	12
3.2.8	Voltage Interruptions and Voltage Dips Immunity.....	12
<b>4</b>	<b>TEST DATA &amp; RELATED INFORMATIONS.....</b>	<b>13</b>
4.1	Emissions .....	13
4.1.1	Conducted Emissions Test .....	13
4.1.1.1	Limit of Conducted Emission Measurement.....	13
4.1.1.2	Test Instruments .....	13
4.1.1.3	Conducted Emissions Test Data.....	14
4.1.1.4	Conducted Emissions Test Setup Photos .....	17
4.1.2	Conducted Telecommunication ports Test .....	18

4.1.2.1	Conducted Telecommunication ports Test Data.....	18
4.1.3	Radiated Emissions Test.....	19
4.1.3.1	Limit of Radiated Emission Measurement.....	19
4.1.3.2	Test Instruments .....	19
4.1.3.3	Radiated Emissions Test Data .....	20
4.1.3.4	Radiated Emissions Test Setup Photos.....	24
4.1.4	Harmonics Current Emissions Test .....	25
4.1.4.1	Test Instruments .....	25
4.1.4.2	Harmonics Current Emissions Test Data .....	25
4.1.4.3	Harmonics Current Emissions Test Setup Photos .....	27
4.1.5	Voltage Fluctuations and Flicker Test .....	28
4.1.5.1	Test Instruments .....	28
4.1.5.2	Voltage Fluctuations and Flicker Test Data.....	28
4.1.5.2	Voltage Fluctuations and Flicker Test Setup Photos .....	29
4.2	Immunity .....	30
4.2.1	Electrostatic Discharge Immunity Test .....	30
4.2.1.1	Test Instruments .....	30
4.2.1.2	Electrostatic Discharge Immunity Test Data.....	30
4.2.1.3	Electrostatic Discharge Immunity Test Setup Photos .....	33
4.2.2	RF Radiated Fields Immunity Test.....	34
4.2.2.1	Test Instruments .....	34
4.2.2.2	RF Radiated Fields Immunity Test Data.....	34
4.2.2.3	RF Radiated Fields Immunity Test Setup Photos.....	36
4.2.3	EFT/Burst Immunity Test.....	37
4.2.3.1	Test Instruments .....	37
4.2.3.2	EFT/Burst Immunity Test Data.....	37
4.2.3.3	EFT/Burst Immunity Test Setup Photos.....	39
4.2.4	Surge Immunity Test .....	40
4.2.4.1	Test Instruments .....	40
4.2.4.2	Surge Immunity Test Data.....	40
4.2.4.3	Surge Immunity Test Setup Photos .....	42
4.2.5	RF Common Mode Immunity Test .....	43
4.2.5.1	Test Instruments .....	43
4.2.5.2	RF Common Mode Immunity Test Data.....	43
4.2.5.3	RF Common Mode Immunity Test Setup Photos .....	45
4.2.6	Power Frequency Magnetic Field Immunity Test.....	46
4.2.6.1	Test Instruments .....	46
4.2.6.2	Power Frequency Magnetic Field Immunity Test Data .....	46
4.2.6.3	Power Frequency Magnetic Field Immunity Test Setup Photos .....	48

- 4.2.7 Voltage Interruptions and Voltage Dips Immunity Test ..... 49
  - 4.2.7.1 Test Instruments ..... 49
    - 4.2.7.2 Voltage Interruptions and Voltage Dips Immunity Test Data..... 49
    - 4.2.7.3 Voltage Interruptions and Voltage Dips Immunity Test Setup Photos ..... 51

## 1 TEST REPORT CERTIFICATION

Client : Smart Cabling & Transmission Corp.  
Address : 10F, No.493, Chung-Cheng Rd., Hsin Tien City, Taipei County, 231, Taiwan  
Manufacturer : Smart Cabling & Transmission Corp.  
Address : 10F, No.493, Chung-Cheng Rd., Hsin Tien City, Taipei County, 231, Taiwan

EUT : Video to VGA converter  
Model No. : AD001XXX  
Test specifications :  
Emissions : EN 55022:2006/A1:2007 (Class B)  
EN 61000-3-2:2006/A1:2009/A2:2009  
EN 61000-3-3:2008

Immunity : IEC61000-4-2:2008  
IEC61000-4-3:2006/A1:2007/A2:2010  
IEC61000-4-4:2004/A1:2010  
IEC61000-4-5:2005  
IEC61000-4-6:2008  
IEC61000-4-8:2009  
IEC61000-4-11:2004

Regulations applied :  
Emissions : EN 55022:2006/A1:2007 (Class B)  
EN 61000-3-2:2006/A1:2009/A2:2009  
EN 61000-3-3:2008

Immunity : EN 55024:1998/A1:2001/A2:2003

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to relieve the sellers from their legal and/or contractual obligations. Besides, the "Comment Issues" highlight above is important information for this test report. Responsible must read carefully about the description.

Test Engineer : Tien-Lu Liao  
(Tien-Lu Liao, Engineer)

Check By : Charles Wang  
( Charles Wang, Supervisor )

Approve & Authorized : Will Yauo  
Will Yauo, Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN



Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9002 : BSMI, TÜV Product Service
- ② ISO/IEC 17025 : BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ EN45001 : TÜV Rheinland, NEMKO, FIMKO, SGS
- ④ Filing : FCC, Industry Canada, VCCI
- ⑤ MRA : Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through CNLA

## 2 GENERAL INFORMATIONS

### 2.1 Description of EUT

Special designed for computer VGA monitor, LCD color monitor.

Dual output: DB15 x 1 for VGA monitor and BNC x 1 for TV monitor.

Support NTSC, PAL video system.

Input video system 50 to 60Hz frame rate detection (NTSC/PAL).

The DEINTERLACED and Scan rate conversion output mode: 640x 480, 800x600, 1024 x 768, up to 1280x1024@60Hz.

On screen display function: Brightness, Contrast, Saturation, Hue, Sharpness, Resolution.

Built in ESD protection.

Any adjustment will be auto memory.

Easy operation.

Built in video auto gain control for good quality picture.

### 2.2 Related Information of EUT

Size of EUT : 90mm x 96mm x 31mm

Power Supply : I/P:100-240Vac,50/60Hz,0.5A  
O/P:DC5V,2A

Highest working  
Frequency : 4MHz

\* For more detailed features, please refer to *User's Manual*.

### 2.3 Tested Configuration

The EUT connected with other devices.

Following peripheral devices and interface cables were connected during the measurement:

Device	Manufacture	Model	Description
Video to VGA converter *	Smart Cabling & Transmission Corp.	AD001XXX	1.5Non-Shieled AC Adapter power cord 1.8m Shieled D-SUB cable with 2 core 1.8m Shieled coaxil cable*2
DVD player	SONY	DVP-NS530	2.0m Unshielded AC Power Cord 1.5mUnshielded AC Power Core
Monitor	DELL	3008WFPt	1.8m Unshielded AC Adaptor Power Cord
LCD TV	SONY	KDL-20S4000	1.6m Unshielded AC Power Cord

Remark “\*” means equipment under test.

## 2.4 Deviation Record

No deviations were required.

## 2.5 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	150kHz ~ 30MHz	2.45(Mains)
Conducted emission at telecommunication ports	150kHz ~ 30MHz	2.22(Voltage)
		2.88(Current)
Radiated emissions	30MHz ~ 1GHz	3.90( $30\text{MHz} \leq f \leq 300\text{MHz}$ )
		3.95( $300\text{MHz} < f \leq 1\text{GHz}$ )
	Above 1GHz	4.42( $1\text{GHz} \leq f \leq 18\text{GHz}$ )

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2.6 Description of Test Mode

The EUT is designed with AC power supply of 100-240Vac, 50-60Hz or radiated emission evaluation, 230Vac/50Hz had been covered during the pre-test. The worst radiated emission data was found at 230Vac/50Hz and recorded in the applied test report.

The EUT has been pre-tested under following modes, and mode 1 is the worst case for final emission test.

Test Mode	Test condition
1	Operation Mode: D-SUB 1280 x 1024
2	Operation Mode: D-SUB 1024 x 768
3	Operation Mode: D-SUB 640 x 480

## 2.7 Modification Record

No modifications were required. (That is the EUT complied with the requirement as tested.)

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Emissions

##### 3.1.1 Conducted Emissions

**[X] – PASS (D-SUB 1280 x 1024 -Neutral)**

Minimum EMI Margin to the limit: -17.24 dB at 0.1677 MHz

**[X] – PASS (D-SUB 1280 x 1024 -Line)**

Minimum EMI Margin to the limit: -16.78 dB at 8.0620 MHz

##### 3.1.2 Conducted Telecommunication ports

Not Applicable

##### 3.1.3 Radiated Emissions

**[X] – PASS (D-SUB 1280 x 1024 -HOR)**

Minimum EMI Margin to the limit: -4.20 dB at 199.9200 MHz

**[X] – PASS (D-SUB 1280 x 1024 -VER)**

Minimum EMI Margin to the limit: -3.00 dB at 199.9200 MHz

#### 3.1.4 Harmonics Current Emissions

**[X] -PASS**

The harmonics current values were under the limits of the class A equipment of the EN 61000-3-2.

#### 3.1.5 Voltage Fluctuations and Flicker

**[X] -PASS**

The voltage fluctuations and flicker values were under the limits of the EN 61000-3-3 requirements.

## 3.2 Immunity

### 3.2.1 Immunity Criteria

The results of all of the immunity tests performed on the EUT were evaluated according to the following criteria, and according to the manufacturer's specifications for the EUT:

**Performance criterion A :** The EUT continued to operate as intended. No degradation of performance or loss of function was allowed below a performance level specified by the manufacturer, when the EUT was used as intended.

**Performance criterion B :** The EUT continued to operate as intended after the test. No degradation of performance or loss of function was allowed below a performance level specified by the manufacturer, when the EUT was used as intended. During the test, degradation of performance was however allowed. No change of actual operating state or stored data was allowed.

**Performance criterion C :** Temporary loss of function was allowed, provided the function was self recoverable or could be restored by the operation of the controls.

### 3.2.2 Electrostatic Discharge Immunity

	<b>Requirement :Criterion B (or better)</b>
<input checked="" type="checkbox"/> - No Degradation of Function	- Satisfies Criterion A
<input type="checkbox"/> - Distortion of Function	- Satisfies Criterion B
<input type="checkbox"/> - Error of Function	- Satisfies Criterion C

### 3.2.3 RF Radiated Fields Immunity

	<b>Requirement :Criterion A</b>
<input checked="" type="checkbox"/> - No Degradation of Function	- Satisfies Criterion A
<input type="checkbox"/> - Distortion of Function	- Satisfies Criterion B
<input type="checkbox"/> - Error of Function	- Satisfies Criterion C

## 3.2.4 EFT/Burst Immunity

**Requirement :Criterion B(or better)**

- |  |                         |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function                | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function                     | - Satisfies Criterion C |

## 3.2.5 Surge Immunity

**Requirement :Criterion B (or better)**

- |  |                         |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function                | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function                     | - Satisfies Criterion C |

## 3.2.6 RF Common Mode Immunity

**Requirement :Criterion A**

- |  |                         |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function                | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function                     | - Satisfies Criterion C |

## 3.2.7 Power Frequency Magnetic Field Immunity

**Requirement :Criterion A**

- |  |                         |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function                | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function                     | - Satisfies Criterion C |

## 3.2.8 Voltage Interruptions and Voltage Dips Immunity

**Requirement :Criterion C (or better)**

- |  |                         |
|--|-------------------------|
| <input type="checkbox"/> - No Degradation of Function        | - Satisfies Criterion A |
| <input checked="" type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function                 | - Satisfies Criterion C |

## 4 TEST DATA & RELATED INFORMATIONS

### 4.1 Emissions

#### 4.1.1 Conducted Emissions Test

##### 4.1.1.1 Limit of Conducted Emission Measurement

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	79	66	66-56	56-46
0.5-5	73	60	56	46
5-30	73	60	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

##### 4.1.1.2 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2011/02/03	2012/02/02
LISN	EMCO	3625/2	2011/03/01	2012/02/28
LISN	Rohde & Schwarz	ESH2-Z5	2010/08/10	2011/08/09
Current Probe	Rohde & Schwarz	ESH2-Z1	2010/10/27	2011/10/26
ISN	FCC	FCC-TLISN-T2-02	2010/10/08	2011/10/07
ISN	RCC	FCC-TLISN-T4-02	2010/10/08	2011/10/07
ISN	RCC	FCC-TLISN-T8-02	2010/10/08	2011/10/07
EMI Test Receiver	Rohde & Schwarz	ESCI	2011/02/03	2012/02/02


## 4.1.1.3 Conducted Emissions Test Data

Operating Conditions of The EUT : D-SUB 1280 x 1024

Test Date : Jun. 09, 2011

Test Specification	EN 55022:2006/A1:2007 (Class B)
Climatic Condition	Ambient Temperature: <u>26</u> °C                      Relative Humidity: <u>55</u> %RH
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

**Test data see the next pages.**

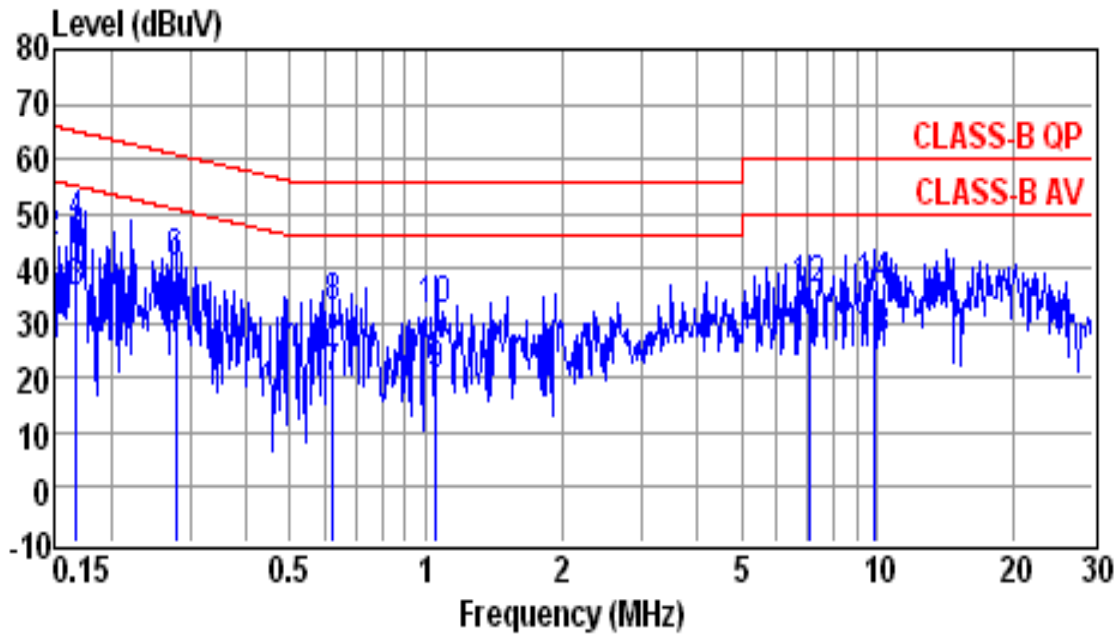


Site	: conducted #1	Date	: 06-09-2011
Condition	: CLASS-B QP	LISN	: NEUTRAL
Tem / Hum	: 26°C / 55%	Test Mode	: D-SUB 1280 x 1024
EUT	: 11-02-RBF-095	Power Rating	: 230VAC/50Hz
Memo	:	Memo	:

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1500	27.41	0.50	27.91	56.00	-28.09	Average
0.1500	44.14	0.50	44.64	66.00	-21.36	QP
0.1677	34.74	0.50	35.24	55.08	-19.84	Average
0.1677	47.34	0.50	47.84	65.08	-17.24	QP
0.2788	28.01	0.50	28.51	50.85	-22.34	Average
0.2788	40.24	0.50	40.74	60.85	-20.11	QP
0.6205	19.24	0.54	19.78	46.00	-26.22	Average
0.6205	31.79	0.54	32.33	56.00	-23.67	QP
1.0540	19.71	0.54	20.25	46.00	-25.75	Average
1.0540	31.27	0.54	31.81	56.00	-24.19	QP
7.1000	24.99	0.79	25.78	50.00	-24.22	Average
7.1000	34.77	0.79	35.56	60.00	-24.44	QP
9.8090	25.96	0.85	26.81	50.00	-23.19	Average
9.8090	35.61	0.85	36.46	60.00	-23.54	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

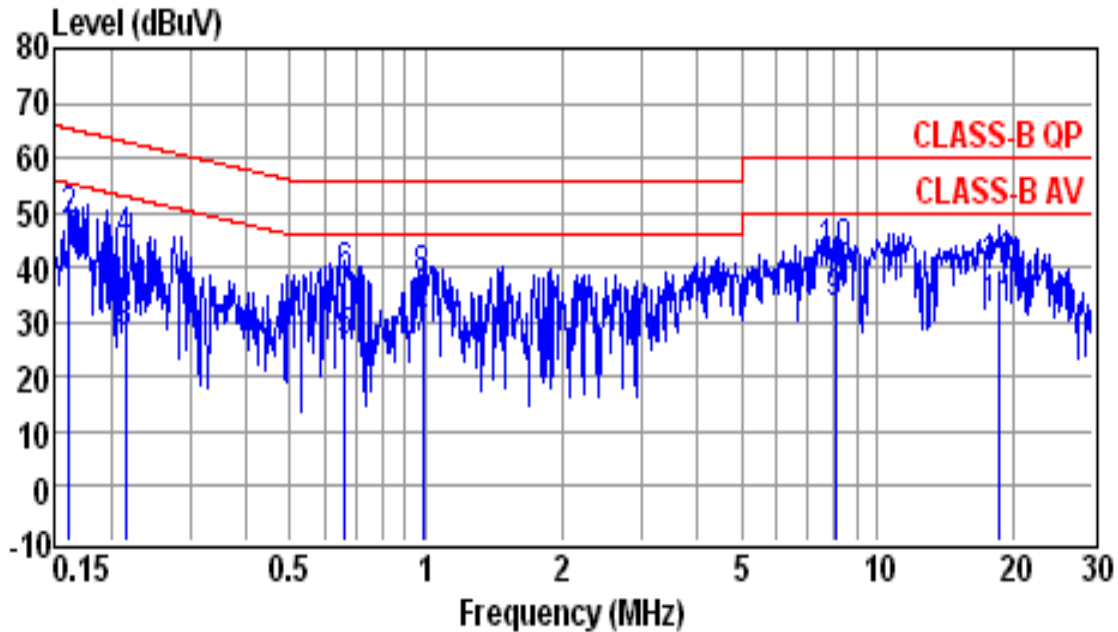

Site	: conducted #1	Date	: 06-09-2011
Condition	: CLASS-B QP	LISN	: LINE
Tem / Hum	: 26°C / 55%	Test Mode	: D-SUB 1280 x 1024
EUT	: 11-02-RBF-095	Power Rating	: 230VAC/50Hz
Memo	:	Memo	:

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1624	34.99	0.50	35.49	55.34	-19.85	Average
0.1624	47.95	0.50	48.45	65.34	-16.89	QP
0.2162	27.08	0.50	27.58	52.96	-25.38	Average
0.2162	43.72	0.50	44.22	62.96	-18.74	QP
0.6613	25.82	0.54	26.36	46.00	-19.64	Average
0.6613	37.36	0.54	37.90	56.00	-18.10	QP
0.9839	25.93	0.54	26.47	46.00	-19.53	Average
0.9839	37.09	0.54	37.63	56.00	-18.37	QP
8.0620	32.40	0.82	33.22	50.00	-16.78	Average
8.0620	41.24	0.82	42.06	60.00	-17.94	QP
18.6220	30.92	1.06	31.98	50.00	-18.02	Average
18.6220	38.69	1.06	39.75	60.00	-20.25	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

## 4.1.1.4 Conducted Emissions Test Setup Photos



4.1.2 Conducted Telecommunication ports Test

4.1.2.1 Conducted Telecommunication ports Test Data

**Not Applicable**

## 4.1.3 Radiated Emissions Test

## 4.1.3.1 Limit of Radiated Emission Measurement.

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
30-230	40	30
230-1000	47	37

Frequency (MHz)	Class A (at 3m)		Class B (at 3m)	
	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Average (dBuV/m)
1000-3000	76	56	70	50
3000-6000	80	60	74	54

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

**Frequency range of radiated measurement**

Highest frequency generated or used within the EUT or on which the WUT operates or tunes (MHz)	Upper frequency of measurement rang (MHz)
Below 108	1000
108-500	2000
500-1000	5000
Above 1000	Up to 5 times of the highest frequency to 6 GHz, whichever is less

## 4.1.3.2 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESVS30	2011/05/13	2012/05/12
Amplifier	HP	8447D	2011/05/09	2012/05/08
Spectrum	Advantest	R3162	2011/03/03	2012/03/01
Bi-Log Antenna	Schaffner	CBL 6111	2011/05/20	2012/05/19
Test Receiver	Rohde & Schwarz	ESU40	2010/08/05	2011/08/04
Amplifier	HP	8449B	2010/12/29	2011/12/28
Horn Antenna	EMCO	3115	2011/05/10	2012/05/09

## 4.1.3.3 Radiated Emissions Test Data


Operating Conditions of The EUT : D-SUB 1280 x 1024

Test Date : Jun. 09, 2011

Test Specification	EN 55022:2006/A1:2007 (Class B)
Climatic Condition	Ambient Temperature: <u>30</u> °C                      Relative Humidity: <u>63</u> %RH
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

**Test data see the next pages.**

(30MHz to 1GHz)

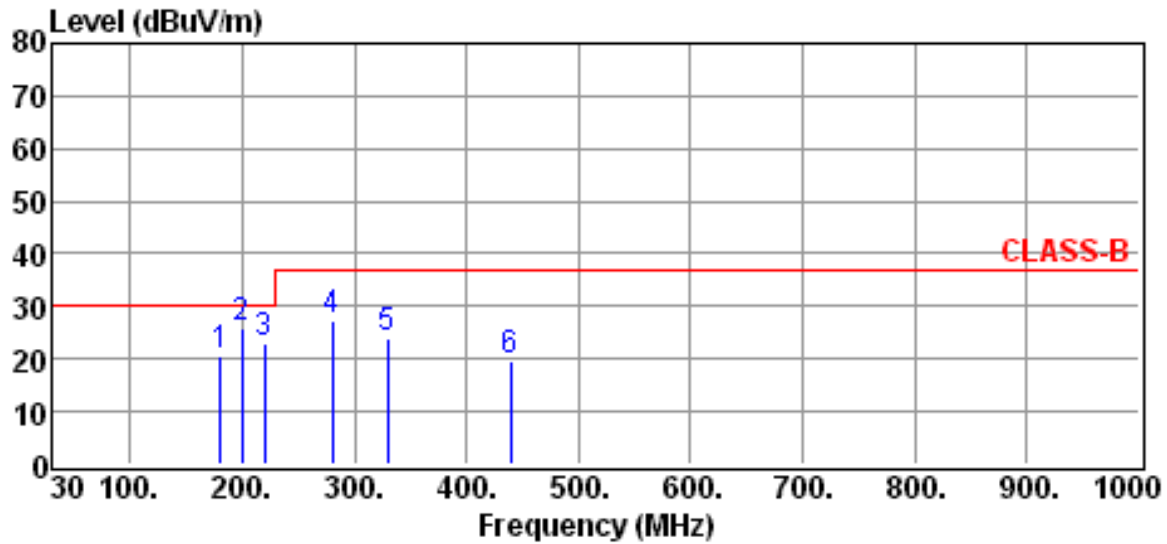


Site	:Open site #2	Date	:2011-06-09
EUT	:11-02-RBF-095	Ant. Pol.	:HORIZONTAL
Model	:	Detector	:QP
Power Rating	:230VAC/50Hz	Engineer	:
Limit	:CLASS-B	Temp.	:30 °C
Memo	: D-SUB 1280 x 1024	Humi.	:63 %

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB
180.1300	8.60	11.80	20.40	30.00	-9.60
199.9200	13.63	12.17	25.80	30.00	-4.20
220.2400	10.67	12.53	23.20	30.00	-6.80
280.1300	10.61	16.49	27.10	37.00	-9.90
329.4000	6.26	17.84	24.10	37.00	-12.90
439.3000	-1.86	21.46	19.60	37.00	-17.40

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

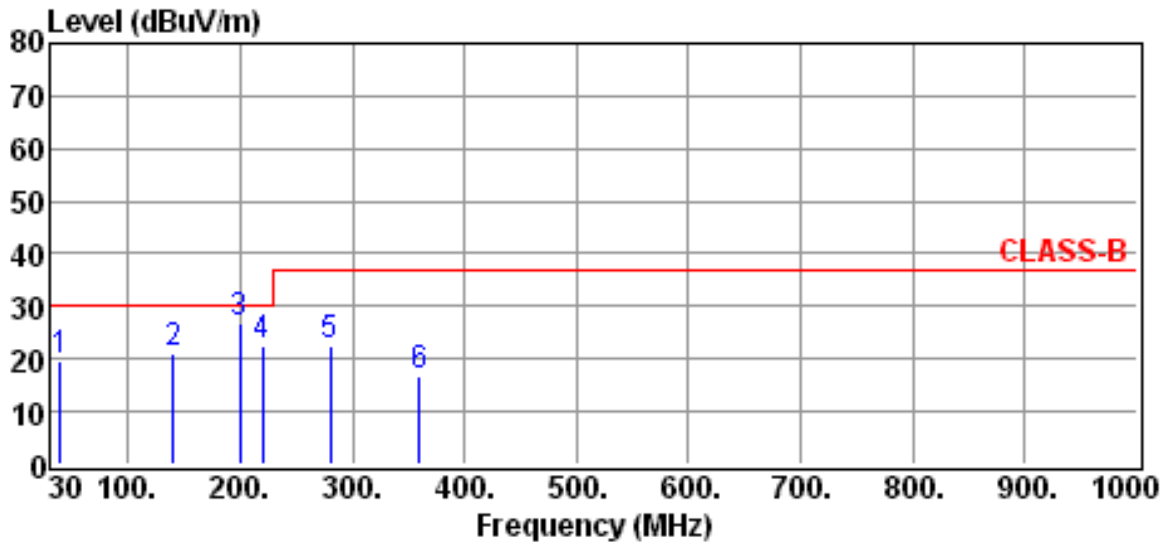

Site	:Open site #2	Date	:2011-06-09
EUT	:11-02-RBF-095	Ant. Pol.	:VERTICAL
Model	:	Detector	:QP
Power Rating:	230VAC/50Hz	Engineer	:
Limit	:CLASS-B	Temp.	:30 °C
Memo	: D-SUB 1280 x 1024	Humi.	:63 %

Freq MHz	Reading dBUV	Correction Factor dB	Result dBUV/m	Limits dBUV/m	Over limit dB
39.4900	5.08	14.62	19.70	30.00	-10.30
140.0300	7.27	13.63	20.90	30.00	-9.10
199.9200	14.83	12.17	27.00	30.00	-3.00
220.2400	10.17	12.53	22.70	30.00	-7.30
280.1300	6.01	16.49	22.50	37.00	-14.50
360.2000	-2.13	18.73	16.60	37.00	-20.40

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result



(Above 1GHz)

Not Applicable

4.1.3.4 Radiated Emissions Test Setup Photos

(30MHz to 1GHz)



## 4.1.4 Harmonics Current Emissions Test

## 4.1.4.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Harmonics-1000	EMC-Partner	Harmonics-1000	2010/12/17	2011/12/16

## 4.1.4.2 Harmonics Current Emissions Test Data

Operating Conditions of The EUT : Operation

Test Date : Jun. 11, 2011


Test Specification	EN 61000-3-2:2006/A1:2009/A2:2009		
Climatic Condition	Ambient Temperature: <u>28</u> °C	Relative Humidity: <u>49</u> %RH	
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz		
Test Set-up	Table-top Equipment		

**Test data see the next pages.**

Operator : Urms = 229.9V Freq = 50 Range: 0.5 A  
 Unit : Irms = 0.045A Ipk = 0.223A cf = 4.989  
 Serialnumber : P = 4.393W S = 10.27VA pf = 0.428  
 Remarks : THDi = 91.10% THDu = 0.10% Class A  
 Test - Time : 3min -100%  
 Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	I <sub>max</sub> [A]	Limit [A]	Order	Freq. [Hz]	Iavg [A]	I <sub>max</sub> [A]	Limit [A]
1	50	0.0191	0.0192		21	1050	0.0071	0.0071	0.1071
2	100	0	0.0006	1.08	22	1100	0	0.0005	0.0836
3	150	0.0166	0.0167	2.3	23	1150	0.0059	0.0059	0.0978
4	200	0	0.0006	0.43	24	1200	0	0.0005	0.0767
5	250	0.0162	0.0163	1.14	25	1250	0	0.0048	0.09
6	300	0	0.0006	0.3	26	1300	0	0.0005	0.0708
7	350	0.0156	0.0156	0.77	27	1350	0	0.0038	0.0833
8	400	0	0.0006	0.23	28	1400	0	0.0005	0.0657
9	450	0.0147	0.0147	0.4	29	1450	0	0.003	0.0776
10	500	0	0.0006	0.184	30	1500	0	0.0005	0.0613
11	550	0.0136	0.0137	0.33	31	1550	0	0.0025	0.0726
12	600	0	0.0006	0.1533	32	1600	0	0.0005	0.0575
13	650	0.0124	0.0125	0.21	33	1650	0	0.0022	0.0682
14	700	0	0.0006	0.1314	34	1700	0	0.0005	0.0541
15	750	0.0112	0.0112	0.15	35	1750	0	0.0021	0.0643
16	800	0	0.0006	0.115	36	1800	0	0.0004	0.0511
17	850	0.0098	0.0098	0.1324	37	1850	0	0.0021	0.0608
18	900	0	0.0006	0.1022	38	1900	0	0.0004	0.0484
19	950	0.0084	0.0085	0.1184	39	1950	0	0.0021	0.0577
20	1000	0	0.0006	0.092	40	2000	0	0.0004	0.046

#### 4.1.4.3 Harmonics Current Emissions Test Setup Photos

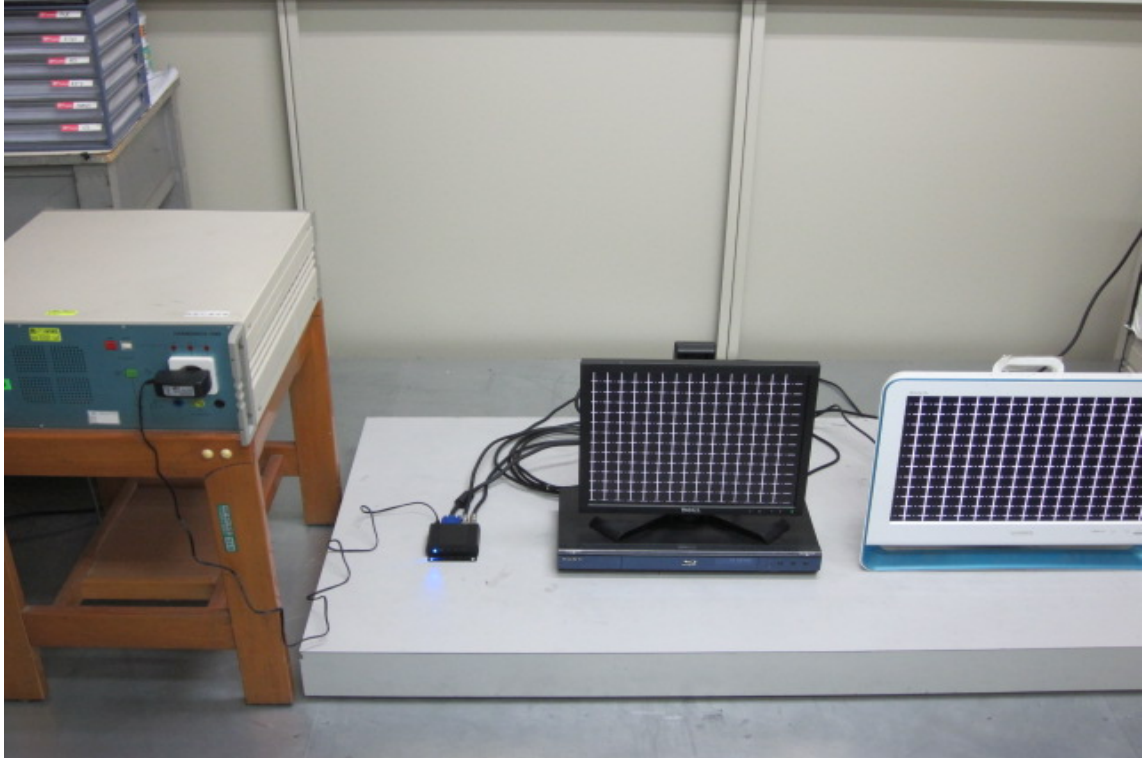

## 4.1.5 Voltage Fluctuations and Flicker Test

### 4.1.5.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Harmonics-1000	EMC-Partner	Harmonics-1000	2010/12/17	2011/12/16

### 4.1.5.2 Voltage Fluctuations and Flicker Test Data

#### Operating Conditions of The EUT : Operation

Test Date : Jun. 11, 2011

Test Specification	EN 61000-3-3:2008		
Climatic Condition	Ambient Temperature: <u>28</u> °C	Relative Humidity: <u>49</u> %RH	
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz		
Test Set-up	Table-top Equipment		

	Test Data	Limit	Pass or Fail
<b>Plt</b>	0.072	0.65	Pass
<b>Pst</b>	0.072	1.00	Pass
<b>dt</b>	0.00 ms	500 ms	Pass
<b>dmax</b>	0.00 %	4.0 %	Pass
<b>dc</b>	0.00 %	3.3 %	Pass

#### 4.1.5.2 Voltage Fluctuations and Flicker Test Setup Photos



## 4.2 Immunity

### 4.2.1 Electrostatic Discharge Immunity Test

#### 4.2.1.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Electrostatic Discharge Simulator	Noiseken	ESS2002	2010/10/08	2011/10/07

#### 4.2.1.2 Electrostatic Discharge Immunity Test Data

**Test data see the next pages.**

## Operating Conditions of The EUT : Operation

Test Date : Jun. 11, 2011

Test Specification	IEC 61000-4-2:2008
Climatic Condition	Ambient Temperature: <u>28</u> °C                      Relative Humidity: <u>48</u> %RH
	Atmospheric Pressure : 990 mbar
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Energy-Storage Capacitor : <u>150</u> pF		Contact Discharge Times : <u>25</u> times/each condition																
Discharge Resistor : <u>330</u> Ω		Air Discharge Times : <u>10</u> times/each condition																
\ Discharge Mode	Contact Discharge								Air Discharge									
	\ ESD Voltage		<u>2</u> kV		<u>4</u> kV		___ kV		___ kV		<u>2</u> kV		<u>4</u> kV		<u>8</u> kV		___ kV	
\Points\Result\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
VCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---	---	---
HCP	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---	---	---
P1-P2	---	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---	
P3-P10	A	A	A	A	---	---	---	---	---	---	---	---	---	---	---	---	---	

Note : “---“means the test could not be carrier out.

“ A ” means the EUT’s function was correct normal performance during the test.

**TEST POINTS**



## 4.2.1.3 Electrostatic Discharge Immunity Test Setup Photos



## 4.2.2 RF Radiated Fields Immunity Test

## 4.2.2.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Antenna	AR	AT5080	N/A	N/A
signal Generator	Aglient	E4421B	2010/08/03	2011/08/02
Amplifier	Ophir	5172	N/A	N/A
Amplifier	Ophir	5127	N/A	N/A
POWER METER	Boonton	4232A	2010/08/06	2011/08/05


## 4.2.2.2 RF Radiated Fields Immunity Test Data

**Test data see the next pages.**

## Operating Conditions of The EUT : Operation

Test Date : Jun. 11, 2011

Test Specification	IEC 61000-4-3:2006/A1:2007/A2:2010
Climatic Condition	Ambient Temperature: <u>28</u> °C                      Relative Humidity: <u>55</u> %RH
	Atmospheric Pressure : 990 mbar
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

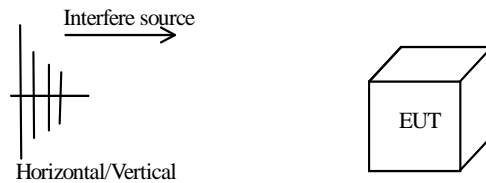

Frequency Range: <u>80</u> MHz ~ <u>1000</u> MHz	Field Strength: <u>3</u> V/m	Modulation (AM 1KHz 80%)	
Sweep Rate : $\leq 1.5 \times 10^{-3}$ decades/s	Step Size : $\leq 1$ % of preceding frequency value	Dwell time : 2.9 s	
Frequency Range (MHz)	Antenna-Polarization	Direction of Device	Test Result
80~1000	Horizontal	front	A
		rear	A
		left	A
		right	A
80~1000	Vertical	front	A
		rear	A
		left	A
		right	A

Note : “A” means the EUT’s function was correct normal performance during the test.

## 4.2.2.3 RF Radiated Fields Immunity Test Setup Photos



## 4.2.3 EFT/Burst Immunity Test

## 4.2.3.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16

## 4.2.3.2 EFT/Burst Immunity Test Data

**Test data see the next pages.**

## Operating Conditions of The EUT : Operation



Test Date : Jun. 11, 2011

Test Specification	IEC 61000-4-4:2004/A1:2010
Climatic Condition	Ambient Temperature: <u>28</u> °C                      Relative Humidity: <u>49</u> %RH
	Atmospheric Pressure : 990 mbar
Power Supply System	AC Power: <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Pulse : 5 /50ns Burst : 15ms /300ms		Repetition Rate : <u>5kHz</u>		Test time : <u>1</u> min/each condition	
\Voltage\Polarity\ \Test Point\Mode\Result\		<u>1.0 kV</u>			
		+	-		
Power Line	L	A	A		
	N	A	A		
	L-N	A	A		
\Voltage\Polarity\ \Test Point\Mode\Result\		<u>0.5 kV</u>			
		+	-		
Video in cable(coaxil cable)		A	A		

Note : "A" means the EUT's function was correct normal performance during the test.

4.2.3.3 EFT/Burst Immunity Test Setup Photos

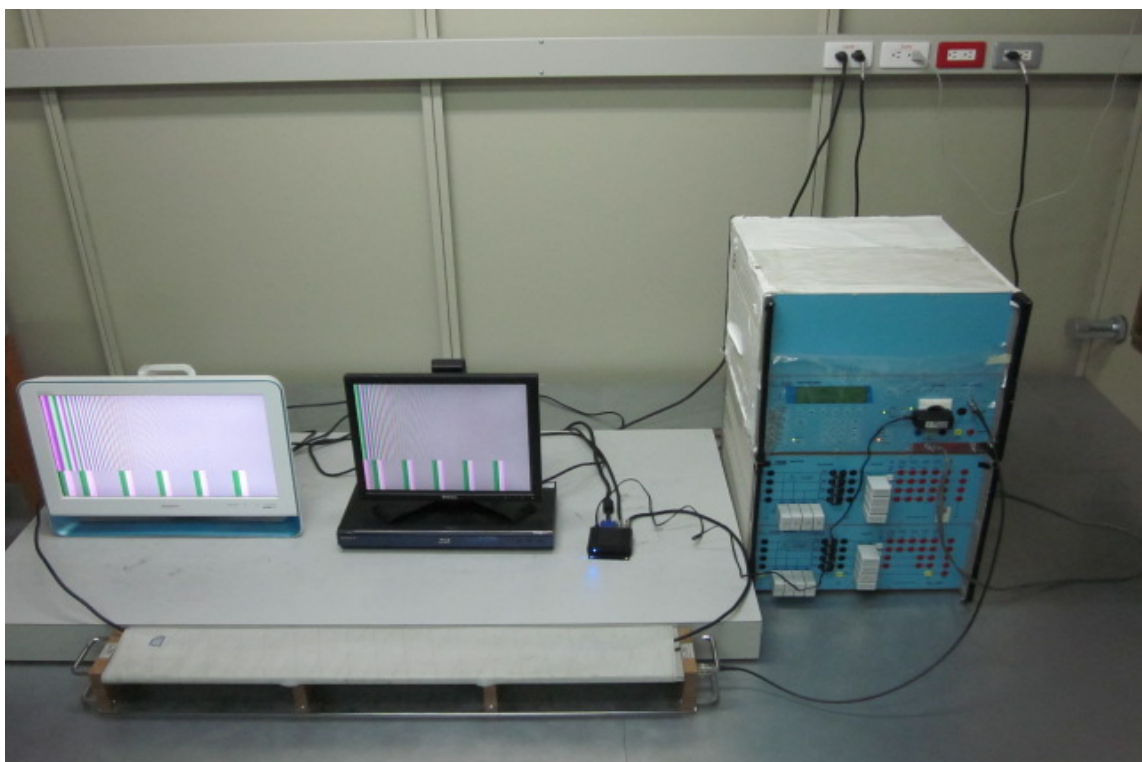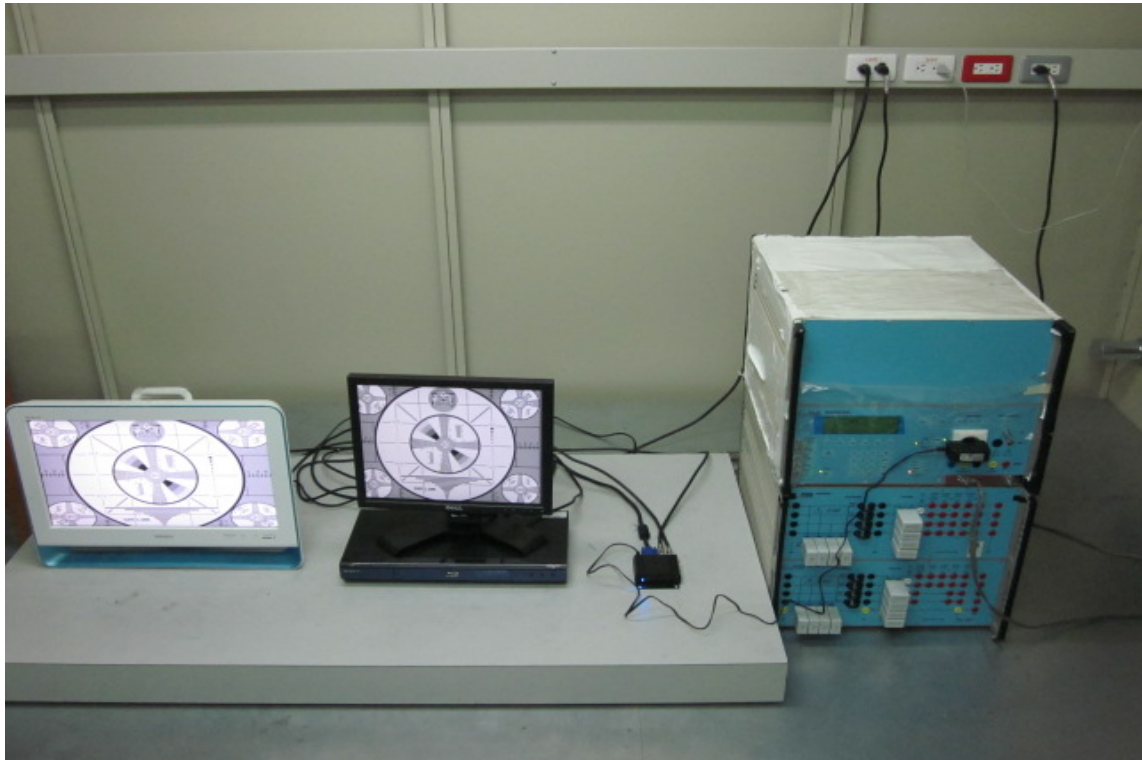

## 4.2.4 Surge Immunity Test

## 4.2.4.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16

## 4.2.4.2 Surge Immunity Test Data

**Test data see the next pages.**

Operating Conditions of The EUT : Operation



Test Date : Jun. 11, 2011

Test Specification	IEC 61000-4-5:2005
Climatic Condition	Ambient Temperature: <u>28</u> °C                      Relative Humidity: <u>49</u> %RH
	Atmospheric Pressure : <u>990</u> mbar
Power Supply System	AC Power: <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Waveform : 1.2/50µs(8/20µs)		Repetition rate : <u>60</u> sec		Times : <u>5</u> time/each condition		
\Phase \Voltage \Mode \Polarity \Result			<b>0°</b>	<b>90°</b>	<b>180°</b>	<b>270°</b>
0.5kV	L – N	+	A	A	A	A
		–	A	A	A	A
1.0kV	L – N	+	A	A	A	A
		–	A	A	A	A

Note : “A” means the EUT’s function was correct normal performance during the test.

4.2.4.3 Surge Immunity Test Setup Photos

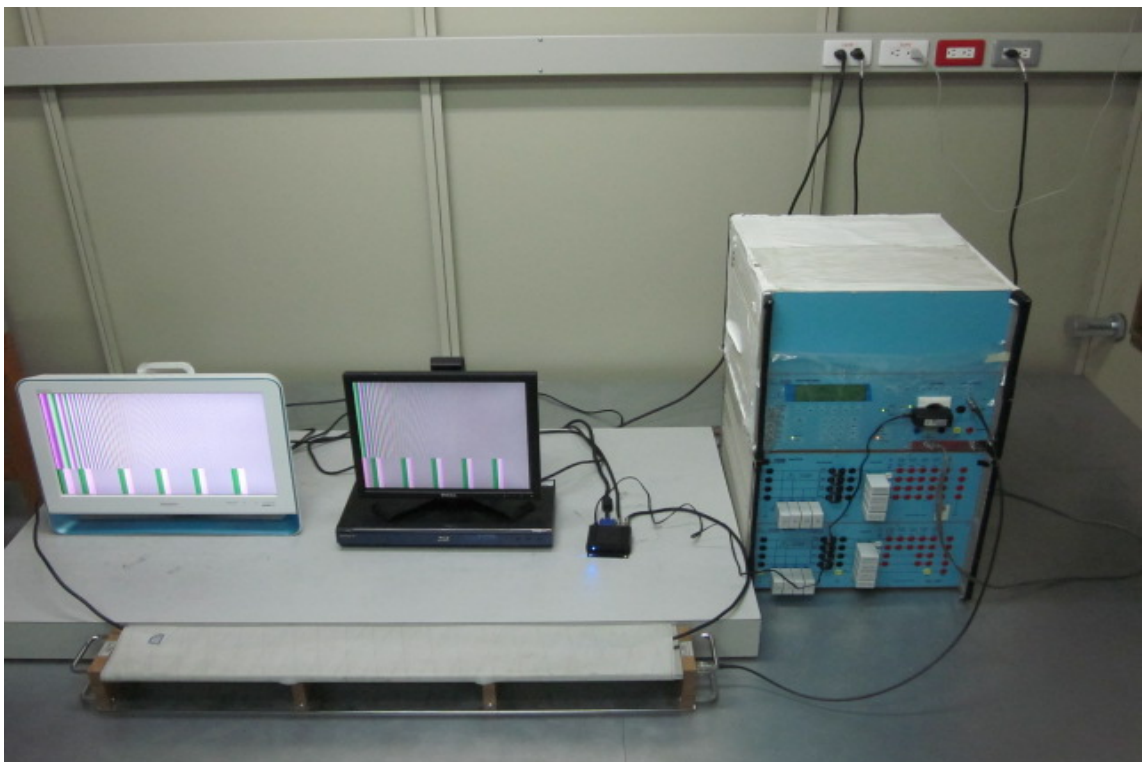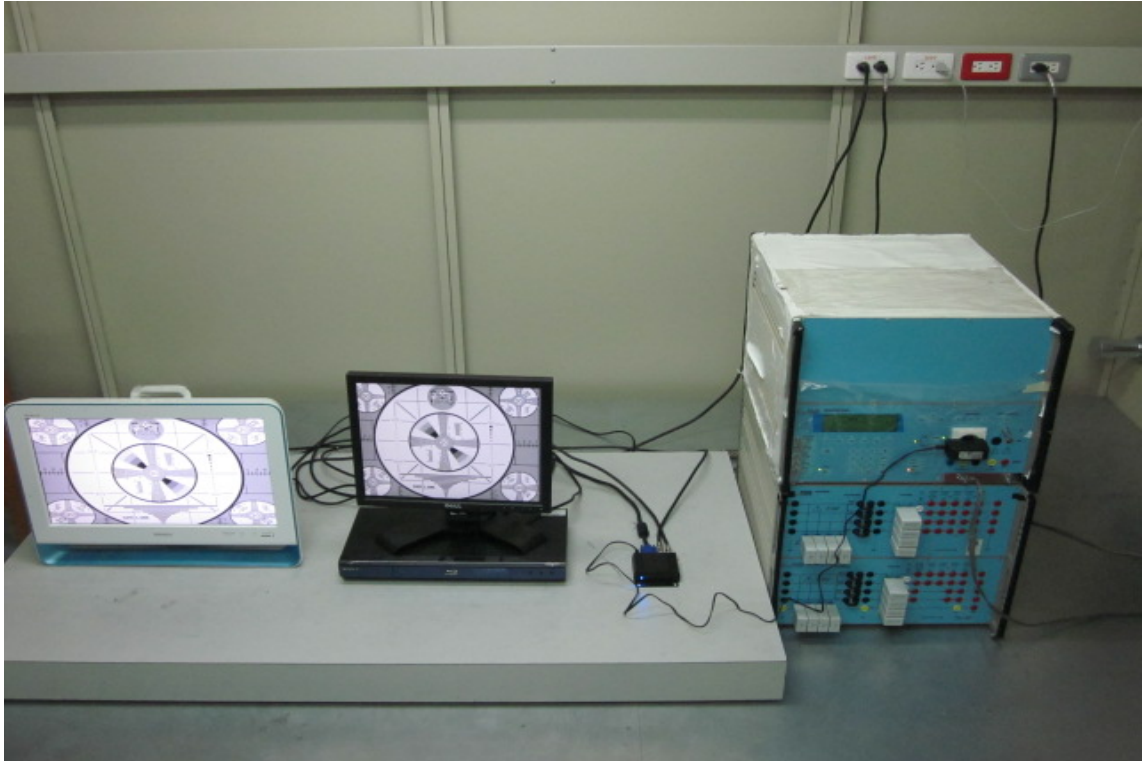

## 4.2.5 RF Common Mode Immunity Test

## 4.2.5.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
CS TESTER	FRANKONIA	CIT-10	2010/11/17	2011/11/16
M2+3 CDN-KIT	FRANKONIA	M2+3	2010/10/08	2011/10/07
SCHAFFUER	CS-CLAMP	KEMZ801	2010/11/17	2011/11/16

## 4.2.5.2 RF Common Mode Immunity Test Data

**Test data see the next pages.**

Operating Conditions of The EUT : Operation


Test Date : Jun. 11, 2011

Test Specification	IEC 61000-4-6:2008
Climatic Condition	Ambient Temperature: <u>28</u> °C                      Relative Humidity: <u>55</u> %RH
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Frequency Range : 0.15 MHz ~ 80 MHz		Test Level : 3 Vrms	Modulation (AM 1kHz 80%)
Sweep Rate : $\leq 1.5 \times 10^{-3}$ decades/s	Step Size : $\leq 1$ % of preceding frequency value		Dwell Time : <u>2.9</u> s
Frequency Range (MHz)	Tested Line	Test Result	
0.15~80	M2	A	
0.15~80	Viedo in cable(S1)	A	

Note : “A” means the EUT’s function was correct normal performance during the test.

4.2.5.3 RF Common Mode Immunity Test Setup Photos

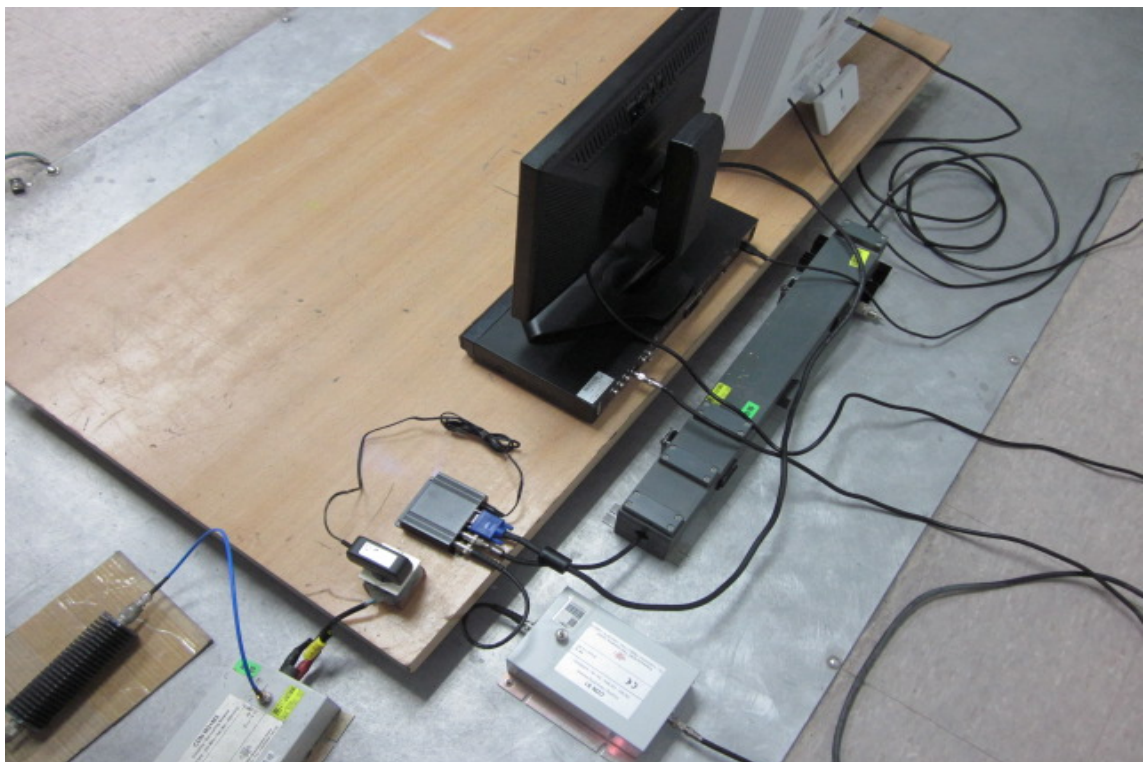

## 4.2.6 Power Frequency Magnetic Field Immunity Test

## 4.2.6.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16
Mfgenerator	EMC-PAPTNER	MF-1000	2011/03/09	2012/03/08




## 4.2.6.2 Power Frequency Magnetic Field Immunity Test Data

**Test data see the next pages.**

Operating Conditions of The EUT : Operation

Test Date : Jun. 11, 2011

Test Specification	IEC61000-4-8:2009	
Climatic Condition	Ambient Temperature: <u>28</u> °C	Relative Humidity: <u>49</u> %RH
	Atmospheric Pressure : <u>990</u> mbar	
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz	
Test Set-up	Table-top Equipment	



Magnetic field frequency : <u>50</u> Hz		Continuous magnetic field strength : <u>1</u> A/m	
Magnetic field direction		Testing result	
X - Axis		A	
Y - Axis		A	
Z - Axis		A	

Note : “ A ” means the EUT’s function was correct normal performance during the test.

## 4.2.6.3 Power Frequency Magnetic Field Immunity Test Setup Photos



## 4.2.7 Voltage Interruptions and Voltage Dips Immunity Test

## 4.2.7.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16

## 4.2.7.2 Voltage Interruptions and Voltage Dips Immunity Test Data

**Test data see the next pages.**

Operating Conditions of The EUT : Operation

Test Date : Jun. 11, 2011



Test Specification	IEC 61000-4-11:2004
Climatic Condition	Ambient Temperature: <u>28</u> °C                      Relative Humidity: <u>49</u> %RH
Power Supply System	AC Power: <u>100</u> Vac <u>60</u> Hz; AC Power: <u>240</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Test mode	Voltage dips	Durations (periods)	Interval(s)	Times	Phase	Result
Voltage interruptions	>95%	250	10	3	0°/180°	B
	>95%	300	10	3	0°/180°	B
Voltage dips in %U <sub>T</sub>	>95%	0.5	10	3	0°/180°	B
	30%	25	10	3	0°/180°	A
	30%	30	10	3	0°/180°	A

Note : “A” means the EUT’s function was correct normal performance during the test.

“B” means the EUT’s function was temporary loss of function or degradation of performance during the test. After test, the EUT recovers its normal performance, without operator intervention.

4.2.7.3 Voltage Interruptions and Voltage Dips Immunity Test Setup Photos

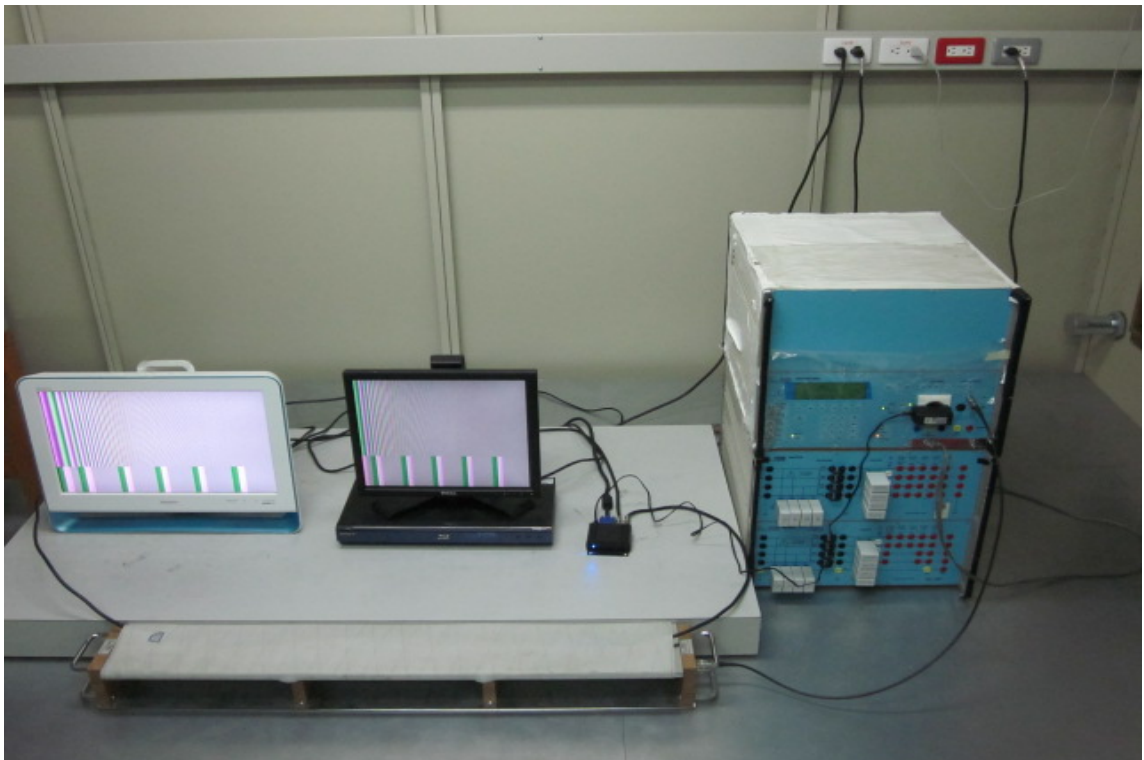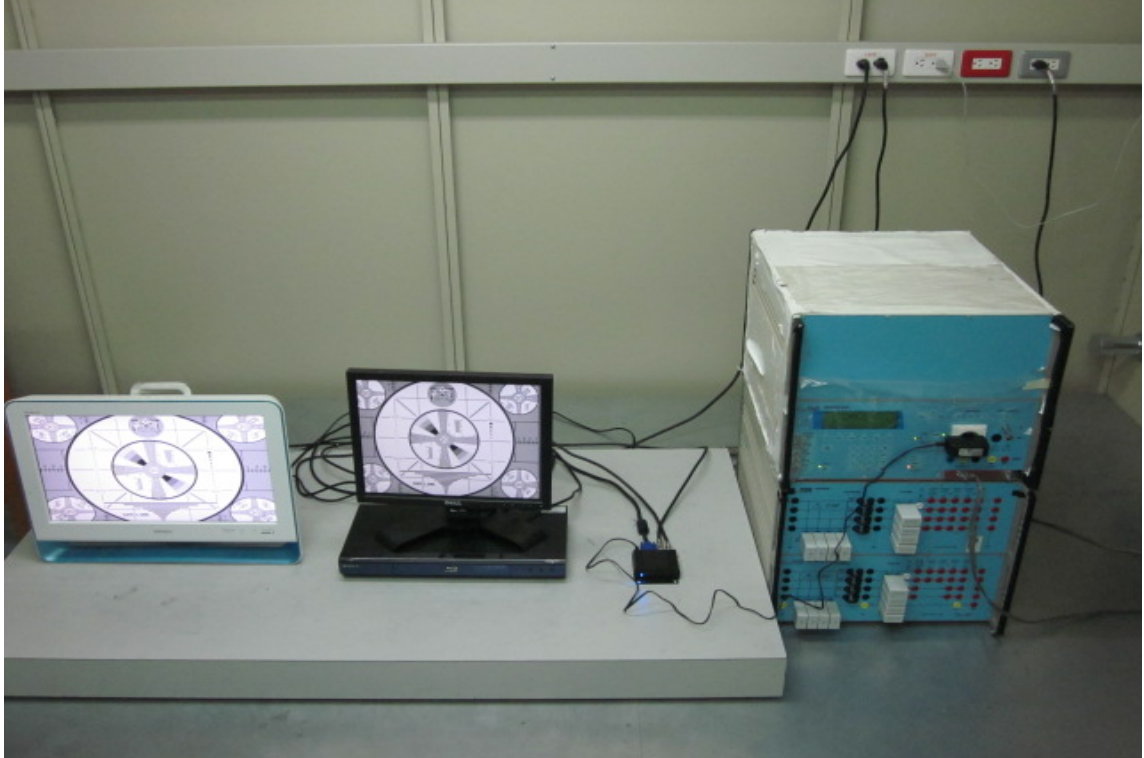

**CONSTRUCTED PHOTOS of EUT**

**A)EUT**

1. Front View of EUT




2. Side View of EUT



**CONSTRUCTED PHOTOS of EUT**

3. Side View of EUT

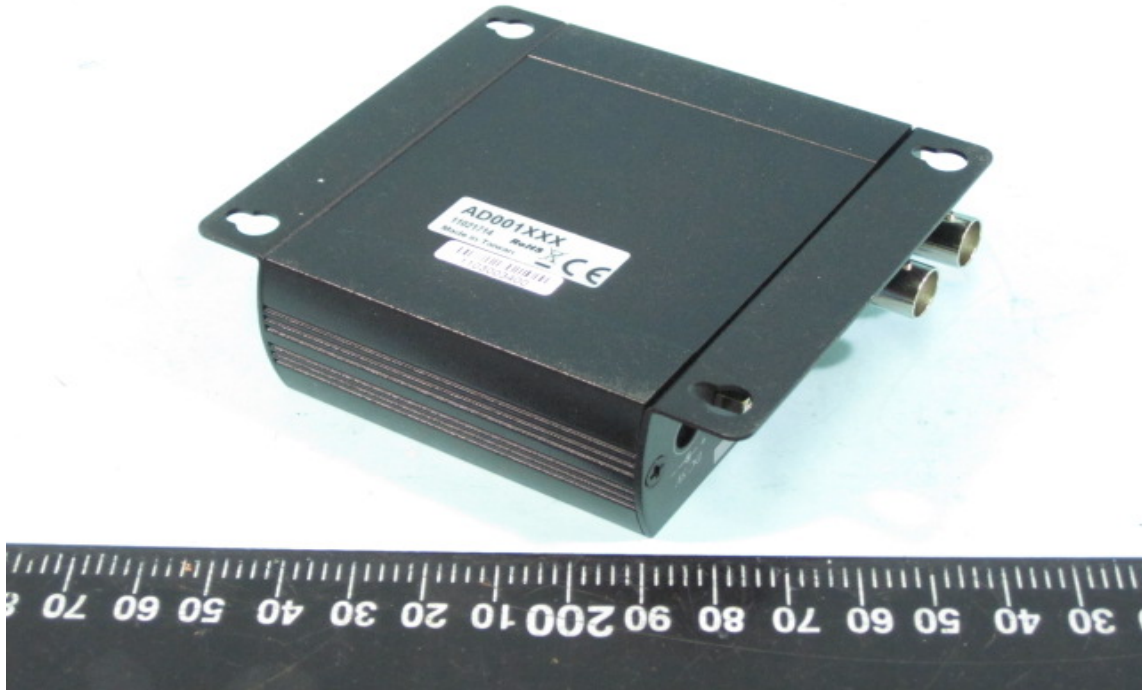


4. Rear View of EUT




**CONSTRUCTED PHOTOS of EUT**

5. Internal View of EUT

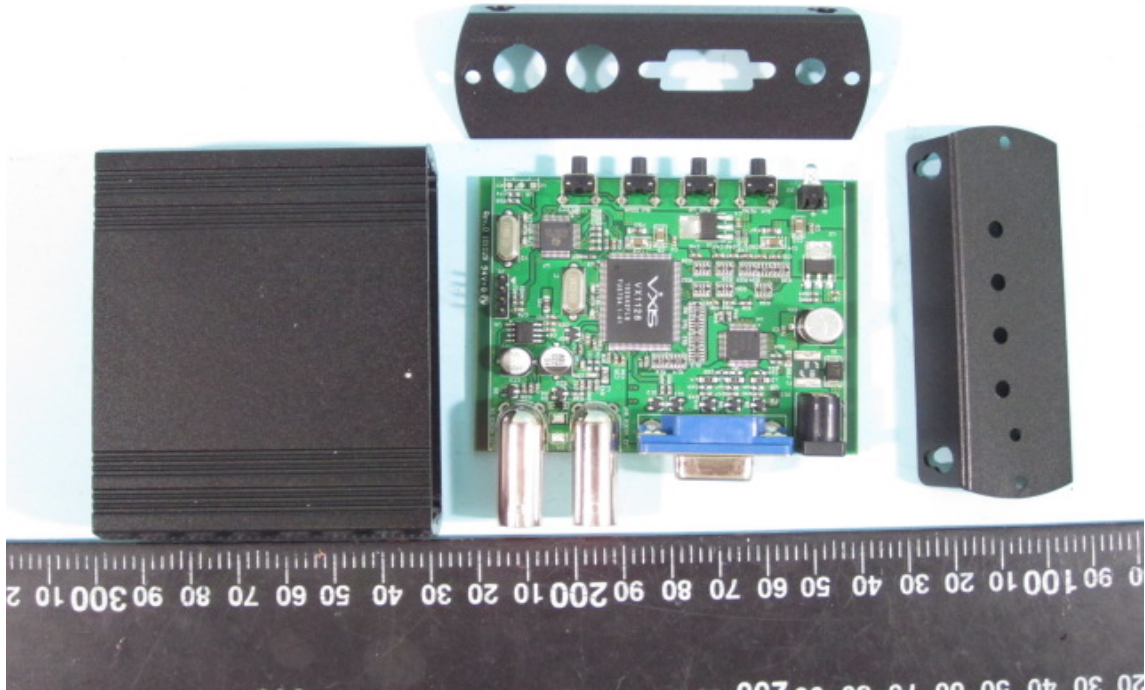


**CONSTRUCTED PHOTOS of EUT**

6. Component View of PCB

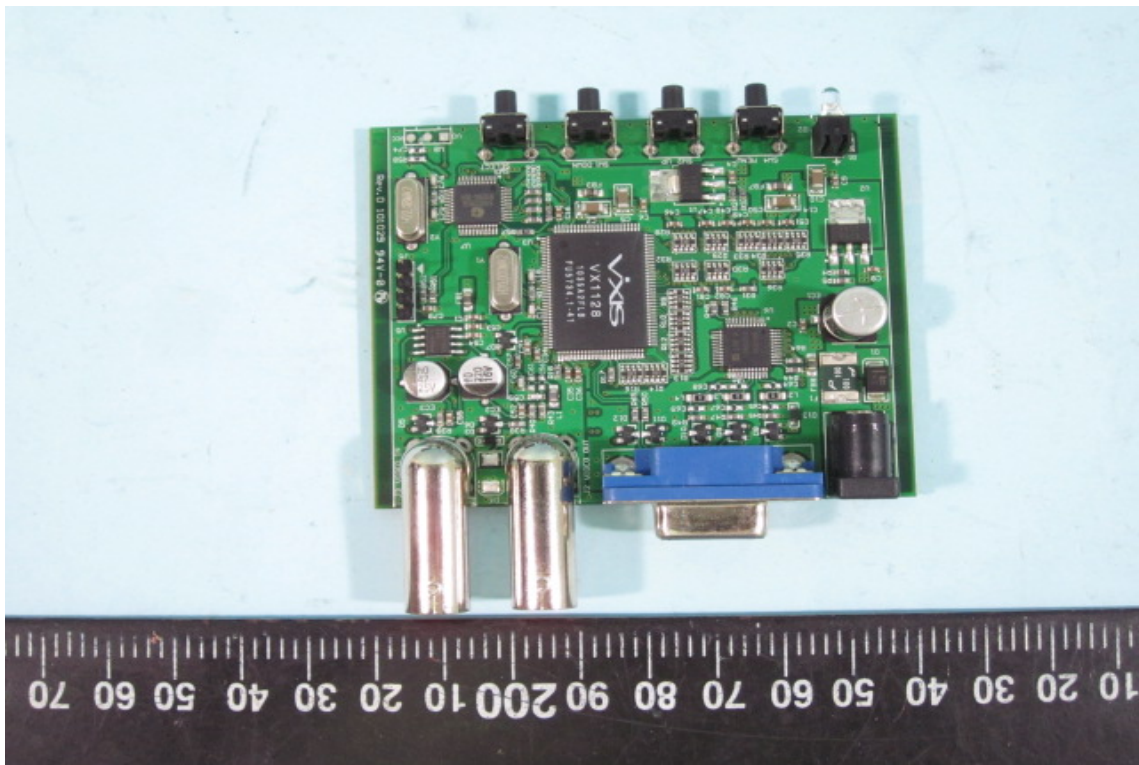

7. Solder View of PCB

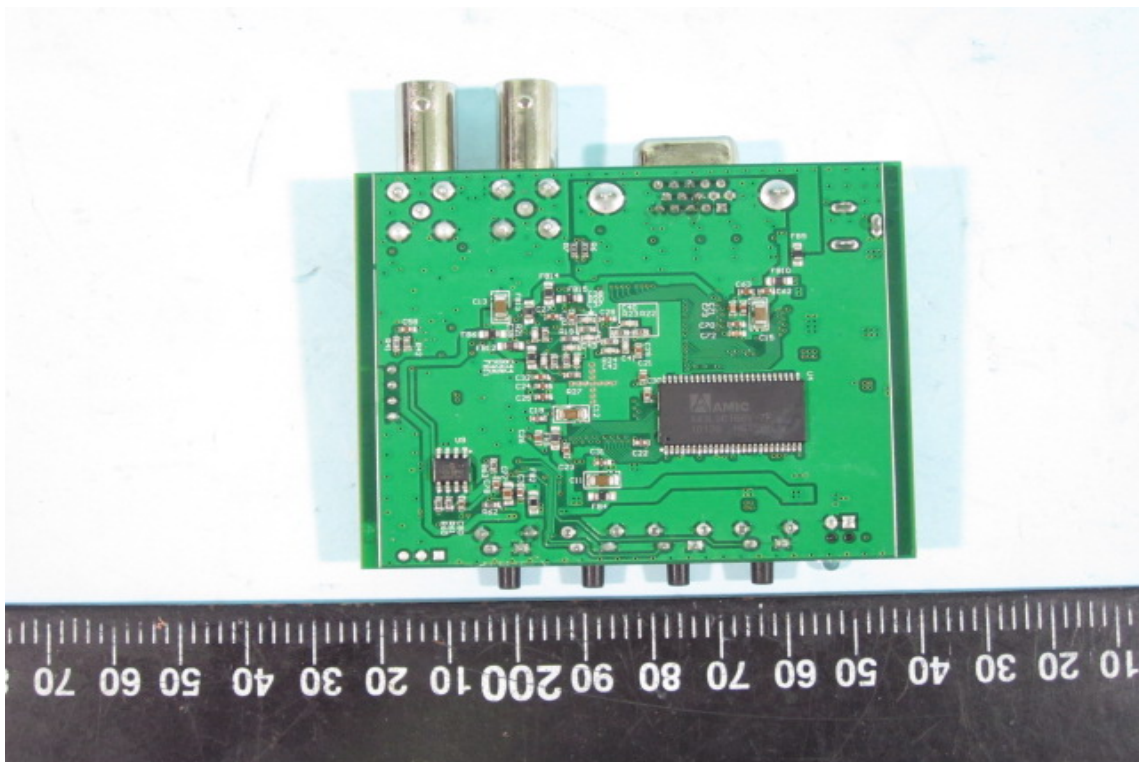

**CONSTRUCTED PHOTOS of EUT**

**B)Adapter**

1. Total View of Adapter



2. Front View of EUT



**CONSTRUCTED PHOTOS of EUT**

3. Side View of EUT



4. Side View of EUT



**CONSTRUCTED PHOTOS of EUT**

## 5. Rear View of EUT

