



Certificate of Conformity

The products

EUT : **WALL PLATE HDMI with IR CAT5 Extender**
Trade Name : **SHE**
Model No. : **HW0XX**

which produced by

SMART HOME ENGINEERING CORP.

10F, No.493, Chung-Cheng Rd., Hsin Tien City, Taipei County, 231, Taiwan

Has been tested by Electronics Testing Center, Taiwan ETC
And was found to comply with the EMC requirements of Directive 2004/108/EC on the basis of

EN 55022:2006/A1:2007(Class B)
EN 61000-3-2:2006/A1:2009/A2:2009
EN 61000-3-3:2008

EN 55024:1998/A1:2001/A2:2003



Will Yauo

Signature

Will Yauo

Manager of EMC Testing Department II
Electronics Testing Center, Taiwan

Report Number : 11-04-RBF-084

Date of Issue: May. 05, 2011

- Note:
1. The results of the Test Report relate only to the items tested.
 2. The Test Report shall not be reproduced except in full, without the written approval of ETC.
 3. Together with the applicant's own documented production control, the applicant (or his European authorized representative) could draw up an EC Declaration of Conformity and affix the CE marking.
 4. EC Declaration of Conformity is the responsibility of the manufacturer/ importer.

ELECTRONICS TESTING CENTER, TAIWAN
NO. 34. LIN 5. DINGFU TSUEN, LINKOU
SHIANG TAIPEI COUNTY,
TAIWAN, 24442, R.O.C.

TEL:(02)26023052
INT:+886-2-26023052
FAX:(02)26010910
INT:+886-2-26010910



EMC

TEST REPORT

Responsible Party : ***SMART HOME ENGINEERING CORP.***

Manufacturer : ***SMART HOME ENGINEERING CORP.***

Description of Product : ***WALL PLATE HDMI with IR CAT5 Extender***

Trade Name : ***SHE***

Model No. : ***HW0XX***

Test Report File No. : ***11-04-RBF-084***

Date Test Item Received : ***Apr. 14, 2011***

Date Test Campaign Completed : ***May 05, 2011***

Date of Issue : ***May 05, 2011***

Test Performed by

ELECTRONICS TESTING CENTER (ETC) , TAIWAN
NO. 34. LIN 5. DINGFU TSUEN, LINKOU SHIANG
TAIPEI COUNTY, TAIWAN, 24442, R.O.C.
TEL : (02)26023052 FAX : (02)26010910
[http:// www.etc.org.tw](http://www.etc.org.tw) ; e-mail: emc@etc.org.tw

This test report consists of 65 Pages. This test report is the property of ETC, and shall not be reproduced except in full, without the written consent of ETC. ETC hereby returns all rights-in-data to [***SMART HOME ENGINEERING CORP.***] for their exclusive legal use.

Note : 1. The results of the Test Report relate only to the items tested.
2. The Test Report shall not be reproduced except in full , without the written approval of ETC.

CONTENTS

● EMC TEST REPORT.....	1
● CONTENTS.....	2
1 TEST REPORT CERTIFICATION.....	5
2 GENERAL INFORMATIONS.....	7
2.1 Description of EUT.....	7
2.2 Related Information of EUT.....	7
2.3 Tested Configuration.....	8
2.4 Deviation Record.....	9
2.5 Measurement Uncertainty.....	9
2.6 Description of Test Mode.....	10
2.7 Modification Record.....	10
3 SUMMARY OF TEST RESULTS.....	11
3.1 Emissions.....	11
3.1.1 Conducted Emissions.....	11
3.1.2 Conducted Telecommunication ports.....	11
3.1.3 Radiated Emissions.....	11
3.1.4 Harmonics Current Emissions.....	11
3.1.5 Voltage Fluctuations and Flicker.....	11
3.2 Immunity.....	12
3.2.1 Immunity Criteria.....	12
3.2.2 Electrostatic Discharge Immunity (Mode: IR Receiver 、 IR Emitter).....	12
3.2.3 RF Radiated Fields Immunity (Mode: IR Receiver 、 IR Emitter).....	12
3.2.4 EFT/Burst Immunity (Mode: IR Receiver 、 IR Emitter).....	13
3.2.5 Surge Immunity (Mode: IR Receiver).....	13
3.2.6 RF Common Mode Immunity (Mode: IR Receiver 、 IR Emitter).....	13
3.2.7 Power Frequency Magnetic Field Immunity (Mode: IR Receiver 、 IR Emitter).....	13
3.2.8 Voltage Interruptions and Voltage Dips Immunity (Mode: IR Receiver).....	13
4 TEST DATA & RELATED INFORMATIONS.....	14
4.1 Emissions.....	14
4.1.1 Conducted Emissions Test.....	14
4.1.1.1 Limit of Conducted Emission Measurement.....	14
4.1.1.2 Test Instruments.....	14
4.1.1.3 Conducted Emissions Test Data.....	15
4.1.1.4 Conducted Emissions Test Setup Photos.....	18
4.1.2 Conducted Telecommunication ports Test.....	19

4.1.2.1	Conducted Telecommunication ports Test Data.....	19
4.1.3	Radiated Emissions Test.....	20
4.1.3.1	Limit of Radiated Emission Measurement.....	20
4.1.3.2	Test Instruments	20
4.1.3.3	Radiated Emissions Test Data.....	21
4.1.3.4	Radiated Emissions Test Setup Photos.....	29
4.1.4	Harmonics Current Emissions Test.....	31
4.1.4.1	Test Instruments	31
4.1.4.1	Harmonics Current Emissions Test Data	31
4.1.4.2	Harmonics Current Emissions Test Setup Photos	33
4.1.5	Voltage Fluctuations and Flicker Test	34
4.1.5.1	Test Instruments	34
4.1.5.1	Voltage Fluctuations and Flicker Test Data.....	34
4.1.5.2	Voltage Fluctuations and Flicker Test Setup Photos	35
4.2	Immunity.....	36
4.2.1	Electrostatic Discharge Immunity Test	36
4.2.1.1	Test Instruments	36
4.2.1.2	Electrostatic Discharge Immunity Test Data.....	36
4.2.1.3	Electrostatic Discharge Immunity Test Setup Photos	41
4.2.2	RF Radiated Fields Immunity Test.....	42
4.2.2.1	Test Instruments	42
4.2.2.2	RF Radiated Fields Immunity Test Data	42
4.2.2.3	RF Radiated Fields Immunity Test Setup Photos.....	45
4.2.3	EFT/Burst Immunity Test.....	46
4.2.3.1	Test Instruments	46
4.2.3.2	EFT/Burst Immunity Test Data	46
4.2.3.3	EFT/Burst Immunity Test Setup Photos.....	49
4.2.4	Surge Immunity Test	51
4.2.4.1	Test Instruments	51
4.2.4.2	Surge Immunity Test Data.....	51
4.2.4.3	Surge Immunity Test Setup Photos	53
4.2.5	RF Common Mode Immunity Test	54
4.2.5.1	Test Instruments	54
4.2.5.2	RF Common Mode Immunity Test Data.....	54
4.2.5.3	RF Common Mode Immunity Test Setup Photos	57
4.2.6	Power Frequency Magnetic Field Immunity Test.....	59
4.2.6.1	Test Instruments	59
4.2.6.2	Power Frequency Magnetic Field Immunity Test Data	59
4.2.6.3	Power Frequency Magnetic Field Immunity Test Setup Photos	62

- 4.2.7 Voltage Interruptions and Voltage Dips Immunity Test 63
 - 4.2.7.1 Test Instruments 63
 - 4.2.7.2 Voltage Interruptions and Voltage Dips Immunity Test Data..... 63
 - 4.2.7.3 Voltage Interruptions and Voltage Dips Immunity Test Setup Photos 65

1 TEST REPORT CERTIFICATION

Client : SMART HOME ENGINEERING CORP.
Address : 10F, No.493, Chung-Cheng Rd., Hsin Tien City, Taipei County, 231, Taiwan
Manufacturer : SMART HOME ENGINEERING CORP.
Address : 10F, No.493, Chung-Cheng Rd., Hsin Tien City, Taipei County, 231, Taiwan
EUT : WALL PLATE HDMI with IR CAT5 Extender
Trade name : SHE
Model No. : HW0XX
Test specifications :
Emissions : EN 55022:2006/A1:2007 (Class B)
EN 61000-3-2:2006/A1:2009/A2:2009
EN 61000-3-3:2008
Immunity : IEC61000-4-2:2008
IEC61000-4-3:2006/A1:2007/A2:2010
IEC61000-4-4:2004/A1:2010
IEC61000-4-5:2005
IEC61000-4-6:2008
IEC61000-4-8:2009
IEC61000-4-11:2004
Regulations applied :
Emissions : EN 55022:2006/A1:2007 (Class B)
EN 61000-3-2:2006/A1:2009/A2:2009
EN 61000-3-3:2008
Immunity : EN 55024:1998/A1:2001/A2:2003

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to relieve the sellers from their legal and/or contractual obligations. Besides, the "Comment Issues" highlight above is important information for this test report. Responsible must read carefully about the description.

Test Engineer : Tien Lu Liao
(Tien-Lu Liao, Engineer)

Check By : Charles Wang
(Charles Wang, Supervisor)

Approve & Authorized : Will Yauo
Will Yauo, Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9002 : BSMI, TÜV Product Service
- ② ISO/IEC 17025 : BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ EN45001 : TÜV Rheinland, NEMKO, FIMKO, SGS
- ④ Filing : FCC, Industry Canada, VCCI
- ⑤ MRA : Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through CNLA

2 GENERAL INFORMATIONS

2.1 Description of EUT

Extends HDMI and IR signal over two CAT5/5e/6 cables.

Transmission range up to 60 meters.

Support high resolution up to 1080p.

Built in auto EQ function, no need to do any adjustment for different range.

Fully HDCP compliant.

HDMI 1.3a compatible, HDCP 1.1, support DDC, EDID, CEC, Hot Plug Detect

Built in IR repeater function, could be control the source devices from remote side.

Receiver unit power could be sending from PCB inside 5V terminal or external 5V DC Jack.

Package includes: transmitter and receiver unit, one external power adapter, IR emitter cable and IR receiver cable. (1.8 meters (6 ft))

2.2 Related Information of EUT

Size of EUT	: 70mm x 116mm x 32mm					
	IR Receiver: I/P: 100-240Vac, 50/60Hz, 0.2A					
Power Supply	: O/P: DC5 V, 1A					
	IR Emitter: DC 5V (HDMI In)					
Highest working Frequency	: 4MHz					
HDMI Cable	: []	Nonshielded	[X]	Shielded	[]	None, Length: <u>1.52 m</u>
I.R. Cable	: []	Nonshielded	[X]	Shielded	[]	None, Length: <u>1.835 m</u>
RJ-45 Cable	: [X]	Nonshielded	[]	Shielded	[]	None, Length: <u>1.8 m*2</u>
AC Adapter Power Cord	: [X]	Nonshielded	[]	Shielded	[]	None, Length: <u>1.51 m</u>
HDMI Cable	: []	Nonshielded	[X]	Shielded	[]	None, Length: <u>1.52 m</u>
I.R. Cable	: []	Nonshielded	[X]	Shielded	[]	None, Length: <u>1.835 m</u>
RJ-45 Cable	: [X]	Nonshielded	[]	Shielded	[]	None, Length: <u>1.8 m*2</u>

* For more detailed features, please refer to User's Manual.

2.3 Tested Configuration

The EUT connected with other devices.

Following peripheral devices and interface cables were connected during the measurement:

Device	Manufacture	Model	Description
WALL PLATE HDMI with IR CAT5 Extender *	SMART HOME ENGINEERING CORP.	HW0XX	1.52m Shielded HDMI Cable 1.835m Shielded I.R. Cable 1.8m Non-Shielded RJ-45 Cable*2 1.51m Non-Shielded AC Adapter Power Cord 1.52m Shielded HDMI Cable 1.835m Shielded I.R. Cable 1.8m Non-Shielded RJ-45 Cable*2
DVD PLAY	SONY	BDP-S350	1.6m Unshielded AC Power Cord
Monitor	SNOY	KDL-20S4000	1.8m Unshielded AC Power Cord 1.6m Shielded D-SUB data line

Remark “*” means equipment under test.

2.4 Deviation Record

No deviations were required.

2.5 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	150kHz ~ 30MHz	2.45dB(Mains)
Conducted emission at telecommunication ports	150kHz ~ 30MHz	2.22 dB(Voltage)
		2.88 dB(Current)
Radiated emissions	30MHz ~ 1GHz	3.90dB($30\text{MHz} \leq f \leq 300\text{MHz}$)
		3.95 dB($300\text{MHz} < f \leq 1\text{GHz}$)
	Above 1GHz	4.42 dB($1\text{GHz} \leq f \leq 18\text{GHz}$)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2.6 Description of Test Mode

The EUT is designed with AC power supply of 100-240Vac, 50-60Hz or radiated emission evaluation, 230Vac/50Hz had been covered during the pre-test. The worst radiated emission data was found at 230Vac/50Hz and recorded in the applied test report.

The EUT has been pre-tested under following modes, and mode 1 & 2 are the worst case for final emission test.

Test Mode	Test condition
1	IR Receiver
2	IR Emitter

2.7 Modification Record

No modifications were required. (That is the EUT complied with the requirement as tested.)

3 SUMMARY OF TEST RESULTS

3.1 Emissions

3.1.1 Conducted Emissions

[X] – PASS (IR Receiver -Neutral)

Minimum EMI Margin to the limit: -10.09 dB at 0.4540 MHz

[X] – PASS (IR Receiver -Line)

Minimum EMI Margin to the limit: -7.81 dB at 0.4516 MHz

3.1.2 Conducted Telecommunication ports

Not Applicable

3.1.3 Radiated Emissions

[X] – PASS (IR Receiver -HOR)

Minimum EMI Margin to the limit: -6.70 dB at 221.7000 MHz

[X] – PASS (IR Receiver -VER)

Minimum EMI Margin to the limit: -3.70 dB at 48.0900 MHz

[X] – PASS (IR Emitter -HOR)

Minimum EMI Margin to the limit: -9.50 dB at 548.5000 MHz

[X] – PASS (IR Emitter -VER)

Minimum EMI Margin to the limit: -4.90 dB at 713.0000 MHz

3.1.4 Harmonics Current Emissions

[X] –PASS

The harmonics current values were under the limits of the class A equipment of the EN 61000-3-2.

3.1.5 Voltage Fluctuations and Flicker

[X] –PASS

The voltage fluctuations and flicker values were under the limits of the EN 61000-3-3 requirements.

3.2 Immunity

3.2.1 Immunity Criteria

The results of all of the immunity tests performed on the EUT were evaluated according to the following criteria, and according to the manufacturer's specifications for the EUT:

- Performance criterion A :** The EUT continued to operate as intended. No degradation of performance or loss of function was allowed below a performance level specified by the manufacturer, when the EUT was used as intended.
- Performance criterion B :** The EUT continued to operate as intended after the test. No degradation of performance or loss of function was allowed below a performance level specified by the manufacturer, when the EUT was used as intended. During the test, degradation of performance was however allowed. No change of actual operating state or stored data was allowed.
- Performance criterion C :** Temporary loss of function was allowed, provided the function was self recoverable or could be restored by the operation of the controls.

3.2.2 Electrostatic Discharge Immunity (Mode: IR Receiver 、 IR Emitter)

Requirement :Criterion B (or better)

- | | |
|--|-------------------------|
| <input type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input checked="" type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function | - Satisfies Criterion C |

3.2.3 RF Radiated Fields Immunity (Mode: IR Receiver 、 IR Emitter)

Requirement :Criterion A

- | | |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function | - Satisfies Criterion C |

3.2.4 EFT/Burst Immunity (Mode: IR Receiver 、 IR Emitter)**Requirement :Criterion B(or better)**

- | | |
|--|-------------------------|
| <input type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input checked="" type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function | - Satisfies Criterion C |

3.2.5 Surge Immunity (Mode: IR Receiver)**Requirement :Criterion B (or better)**

- | | |
|--|-------------------------|
| <input type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input checked="" type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function | - Satisfies Criterion C |

3.2.6 RF Common Mode Immunity (Mode: IR Receiver 、 IR Emitter)**Requirement :Criterion A**

- | | |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function | - Satisfies Criterion C |

3.2.7 Power Frequency Magnetic Field Immunity (Mode: IR Receiver 、 IR Emitter)**Requirement :Criterion A**

- | | |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function | - Satisfies Criterion C |

3.2.8 Voltage Interruptions and Voltage Dips Immunity (Mode: IR Receiver)**Requirement :Criterion C (or better)**

- | | |
|--|-------------------------|
| <input checked="" type="checkbox"/> - No Degradation of Function | - Satisfies Criterion A |
| <input type="checkbox"/> - Distortion of Function | - Satisfies Criterion B |
| <input type="checkbox"/> - Error of Function | - Satisfies Criterion C |

4 TEST DATA & RELATED INFORMATIONS

4.1 Emissions

4.1.1 Conducted Emissions Test

4.1.1.1 Limit of Conducted Emission Measurement

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	79	66	66-56	56-46
0.5-5	73	60	56	46
5-30	73	60	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.1.2 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2011/02/03	2012/02/02
LISN	EMCO	3625/2	2010/02/08	2012/02/28
LISN	Rohde & Schwarz	ESH2-Z5	2010/07/16	2011/08/09
Current Probe	Rohde & Schwarz	ESH2-Z1	2010/10/01	2011/10/26
ISN	FCC	FCC-TLISN-T2-02	2010/10/08	2011/10/07
ISN	RCC	FCC-TLISN-T4-02	2010/10/08	2011/10/07
ISN	RCC	FCC-TLISN-T8-02	2010/10/08	2011/10/07
EMI Test Receiver	Rohde & Schwarz	ESCI	2011/02/03	2012/02/02


4.1.1.3 Conducted Emissions Test Data

Operating Conditions of The EUT : IR Receiver

Test Date : May 04, 2011

Test Specification	EN 55022:2006/A1:2007 (Class B)	
Climatic Condition	Ambient Temperature: <u>26</u> °C	Relative Humidity: <u>55</u> %RH
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz	
Test Set-up	Table-top Equipment	

Test data see the next pages.

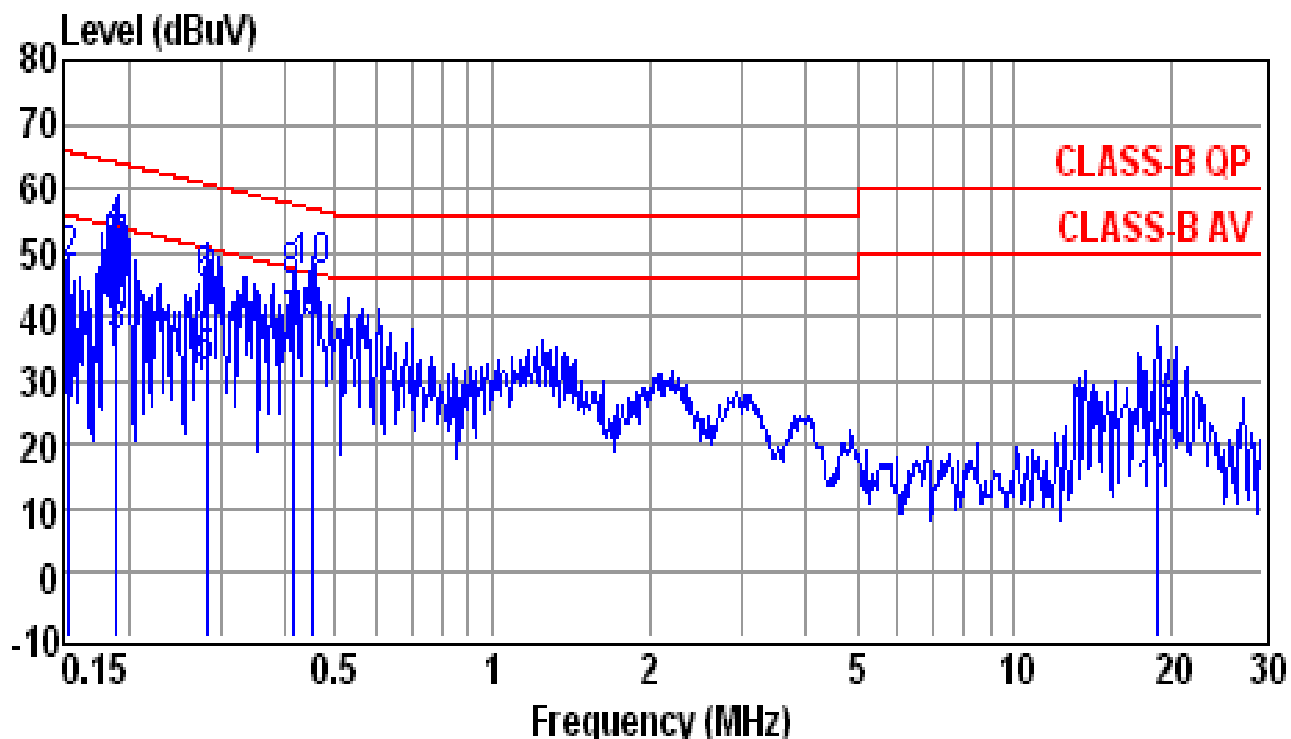


Site	: conducted #1	Date	: 05-04-2011
Condition	: CLASS-B QP	LISN	: NEUTRAL
Tem / Hum	: 26 °C / 55%	Test Mode	:
EUT	: IR Receiver	Power Rating	: 230VAC/50Hz
Memo	:	Memo	:

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1540	34.26	0.50	34.76	55.78	-21.02	Average
0.1540	47.14	0.50	47.64	65.78	-18.14	QP
0.1894	35.72	0.50	36.22	54.06	-17.84	Average
0.1894	52.03	0.50	52.53	64.06	-11.53	QP
0.2818	31.13	0.50	31.63	50.76	-19.13	Average
0.2818	43.90	0.50	44.40	60.76	-16.36	QP
0.4127	36.75	0.52	37.27	47.59	-10.32	Average
0.4127	44.72	0.52	45.24	57.59	-12.35	QP
0.4540	37.84	0.53	38.37	46.80	-8.43	Average
0.4540	46.18	0.53	46.71	56.80	-10.09	QP
18.9200	10.32	1.06	11.38	50.00	-38.62	Average
18.9200	21.83	1.06	22.89	60.00	-37.11	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

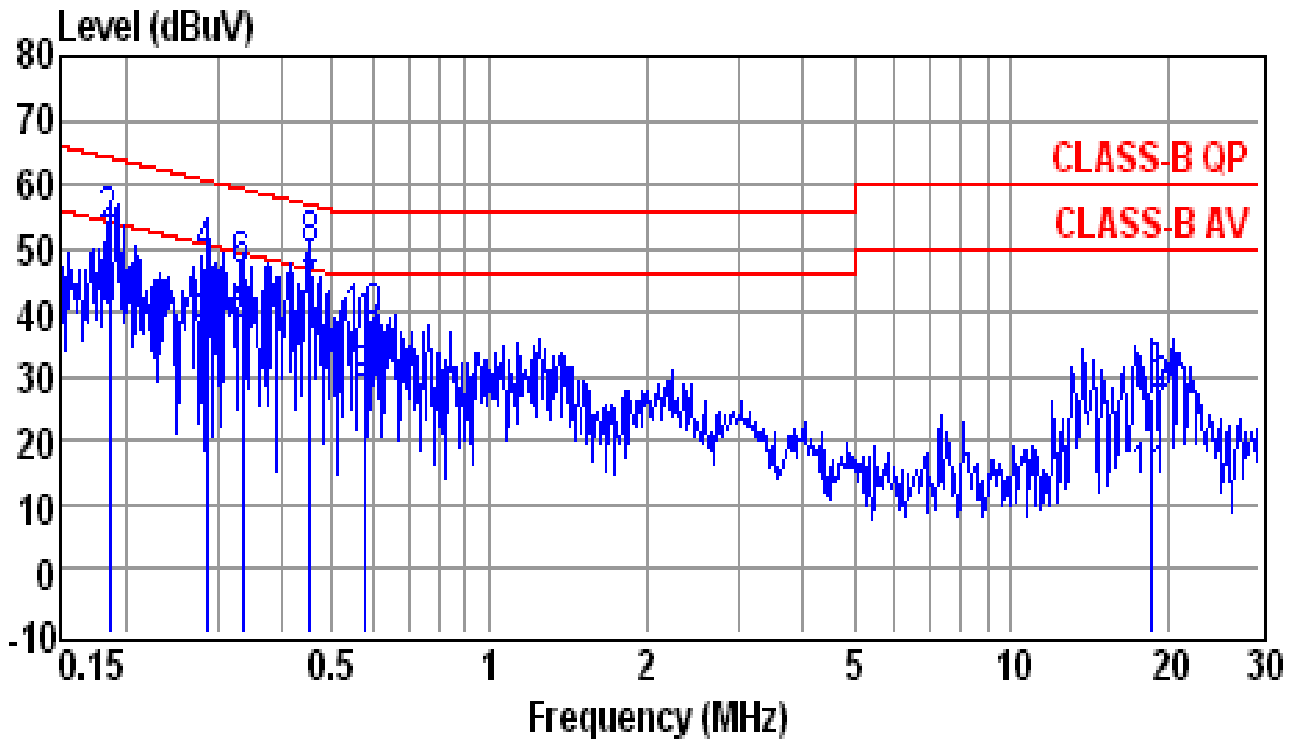

Site	: conducted #1	Date	: 05-04-2011
Condition	: CLASS-B QP	LISN	: LINE
Tem / Hum	: 26 °C / 55%	Test Mode	:
EUT	: IR Receiver	Power Rating	: 230VAC/50Hz
Memo	:	Memo	:

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1864	39.32	0.50	39.82	54.20	-14.38	Average
0.1864	52.31	0.50	52.81	64.20	-11.39	QP
0.2863	36.23	0.51	36.74	50.63	-13.89	Average
0.2863	47.72	0.51	48.23	60.63	-12.40	QP
0.3356	37.15	0.52	37.67	49.31	-11.64	Average
0.3356	45.37	0.52	45.89	59.31	-13.42	QP
0.4516	41.12	0.53	41.65	46.85	-5.20	Average
0.4516	48.51	0.53	49.04	56.85	-7.81	QP
0.5731	27.79	0.54	28.33	46.00	-17.67	Average
0.5731	37.17	0.54	37.71	56.00	-18.29	QP
18.7210	12.30	1.06	13.36	50.00	-36.64	Average
18.7210	25.60	1.06	26.66	60.00	-33.34	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

4.1.1.4 Conducted Emissions Test Setup Photos

4.1.2 Conducted Telecommunication ports Test**4.1.2.1 Conducted Telecommunication ports Test Data**

Not Applicable

4.1.3 Radiated Emissions Test

4.1.3.1 Limit of Radiated Emission Measurement.

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
30-230	40	30
230-100	47	37

Frequency (MHz)	Class A (at 3m)		Class B (at 3m)	
	Peak (dBuV/m)	Average (dBuV/m)	Peak (dBuV/m)	Average (dBuV/m)
1000-3000	76	56	70	50
3000-6000	80	60	74	54

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Frequency range of radiated measurement

Highest frequency generated or used within the EUT or on which the WUT operates or tunes (MHz)	Upper frequency of measurement rang (MHz)
Below 108	1000
108-500	2000
500-1000	5000
Above 1000	Up to 5 times of the highest frequency to 6 GHz, whichever is less

4.1.3.2 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESVS30	2010/05/14	2011/05/13
Amplifier	HP	8447D	2010/10/08	2011/10/07
Spectrum	Advantest	R3162	2010/03/01	2012/03/01
Bi-Log Antenna	Schaffner	CBL 6111	2010/05/21	2011/05/20
Test Receiver	Rohde & Schwarz	ESU40	2010/08/05	2011/08/04
Amplifier	HP	8449B	2010/12/29	2011/12/28
Horn Antenna	EMCO	3115	2010/05/11	2011/05/10

4.1.3.3 Radiated Emissions Test Data


1. Operating Conditions of The EUT : IR Receiver

Test Date : May 04, 2011

Test Specification	EN 55022:2006/A1:2007 (Class B)
Climatic Condition	Ambient Temperature: <u>26</u> °C Relative Humidity: <u>65</u> %RH
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Test data see the next pages.

(30MHz to 1GHz)

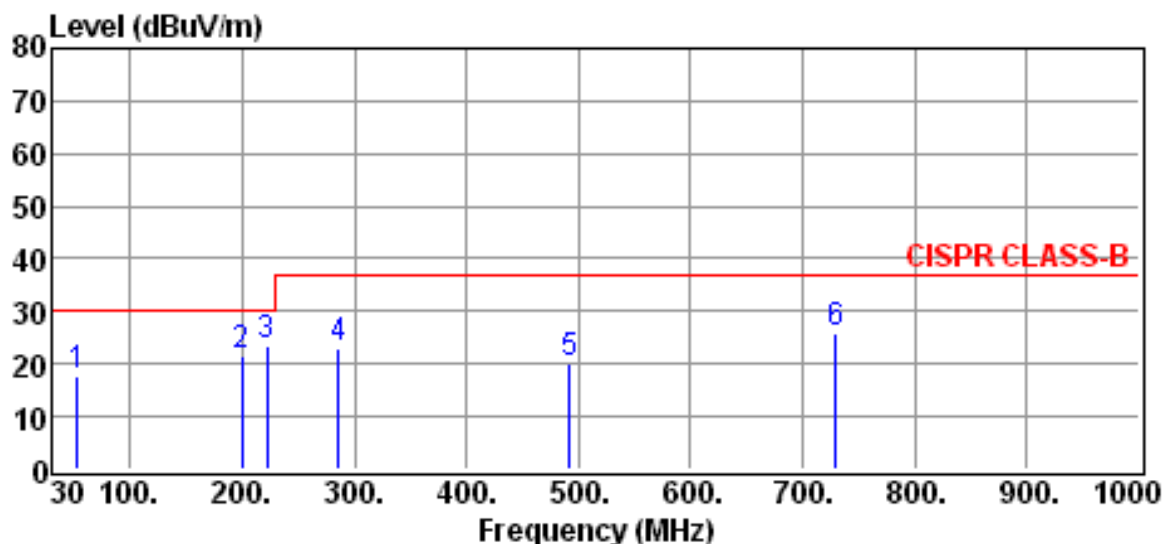


Site	:Open site #2	Date	:2011-05-04
EUT	:I.R. Receiver	Ant. Pol.	:HORIZONTAL
Model	:Operation	Detector	:
Power Rating		:230VAC/50Hz	Engineer :
Limit	:CISPR CLASS-B	Temp.	:26 °C
Memo	:	Humi.	:65 %

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB
53.2200	8.82	8.88	17.70	30.00	-12.30
199.2900	9.33	12.17	21.50	30.00	-8.50
221.7000	10.51	12.79	23.30	30.00	-6.70
285.4200	6.17	16.63	22.80	37.00	-14.20
492.5000	-2.51	22.81	20.30	37.00	-16.70
729.8000	-1.96	27.96	26.00	37.00	-11.00

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

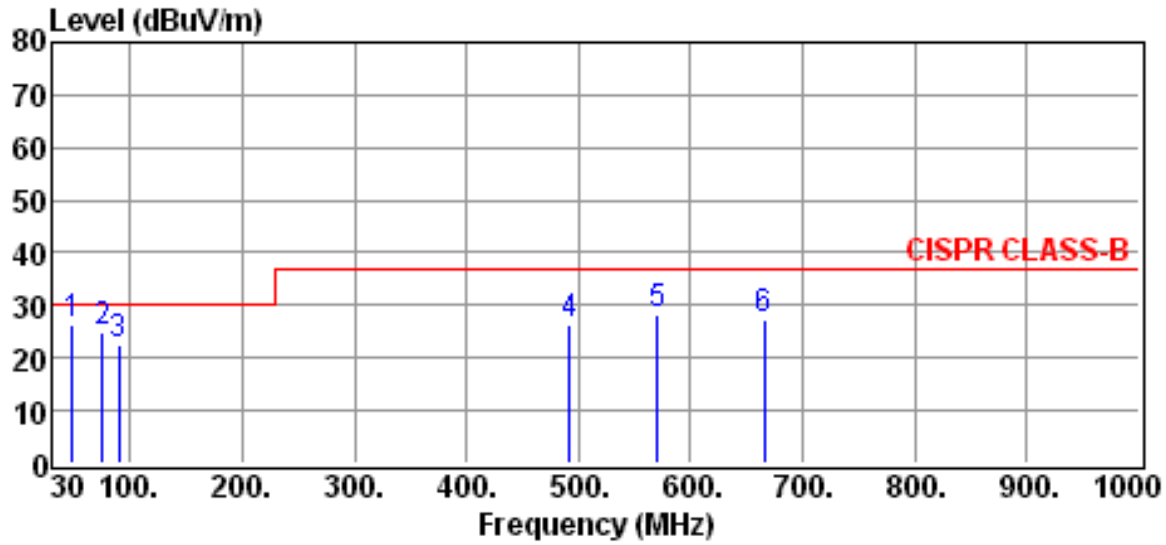

Site :Open site #2 Date :2011-05-04
 EUT :I.R. Receiver Ant. Pol. :VERTICAL
 Model :Operation Detector :
 Power Rating :230VAC/50Hz Engineer :
 Limit :CISPR CLASS-B Temp. :26 °C
 Memo : Humi. :65 %

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB
48.0900	16.23	10.07	26.30	30.00	-3.70
75.9000	15.74	9.06	24.80	30.00	-5.20
89.9400	11.19	11.11	22.30	30.00	-7.70
492.5000	3.39	22.81	26.20	37.00	-10.80
570.9000	3.52	24.98	28.50	37.00	-8.50
666.1000	1.00	26.50	27.50	37.00	-9.50

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

(Above 1GHz)

Not Applicable


2. Operating Conditions of The EUT : IR Emitter

Test Date : May 04, 2011

Test Specification	EN 55022:2006/A1:2007 (Class B)
Climatic Condition	Ambient Temperature: <u>26</u> °C Relative Humidity: <u>65</u> %RH
Power Supply System	DC Power : <u>5</u> Vdc
Test Set-up	Table-top Equipment

Test data see the next pages.

(30MHz to 1GHz)

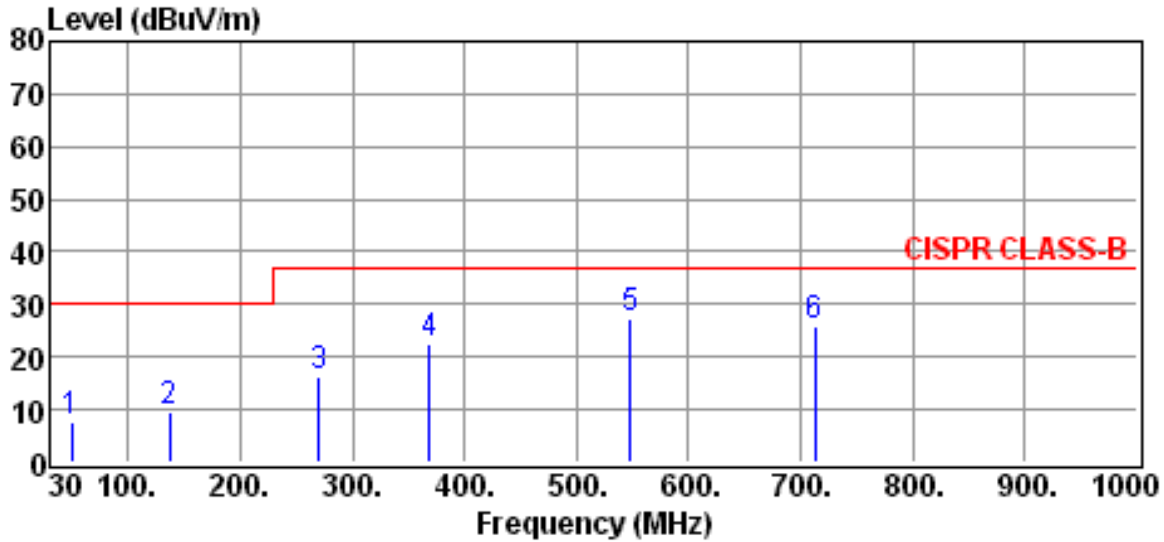


Site	:Open site #2	Date	:2011-05-04
EUT	:I.R. Emitter	Ant. Pol.	:HORIZONTAL
Model	:Operation	Detector	:
Power Rating	:DC 5V	Engineer	:
Limit	:CISPR CLASS-B	Temp.	:26 °C
Memo	:	Humi.	:65 %

Freq MHz	Reading dBUV	Correction Factor dB	Result dBUV/m	Limits dBUV/m	Over limit dB
49.1700	-2.23	9.73	7.50	30.00	-22.50
137.4600	-4.01	13.71	9.70	30.00	-20.30
270.5700	-0.02	16.42	16.40	37.00	-20.60
368.6000	3.44	19.06	22.50	37.00	-14.50
548.5000	2.76	24.74	27.50	37.00	-9.50
713.0000	-1.45	27.35	25.90	37.00	-11.10

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

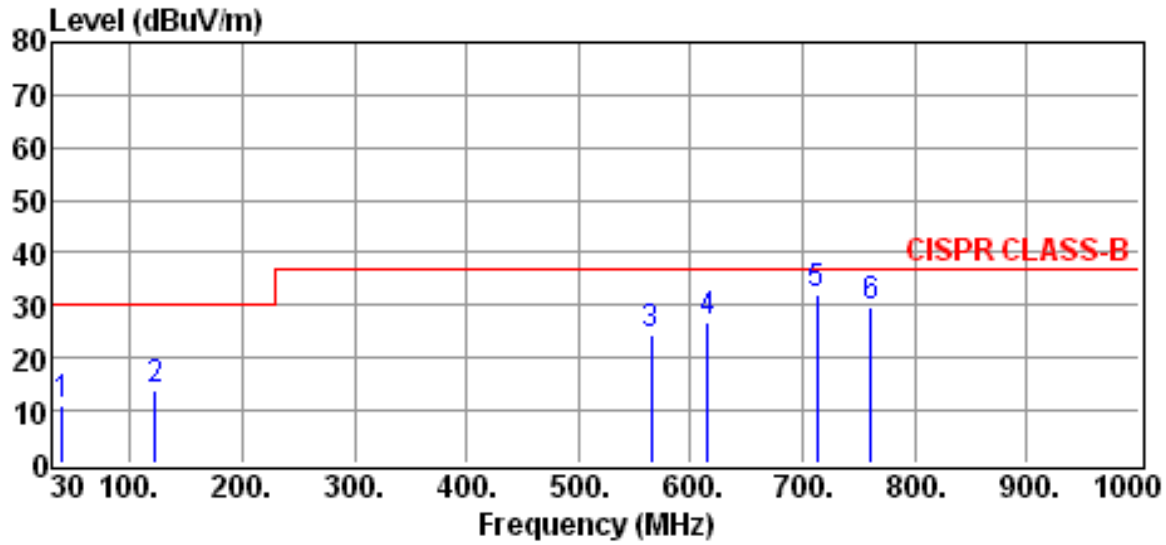

Site	:Open site #2	Date	:2011-05-04
EUT	:I.R. Emitter	Ant. Pol.	:VERTICAL
Model	:Operation	Detector	:
Power Rating	:DC 5V	Engineer	:
Limit	:CISPR CLASS-B	Temp.	:26 °C
Memo	:	Humi.	:65 %

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB
39.4500	-3.72	14.62	10.90	30.00	-19.10
122.6100	-0.31	14.11	13.80	30.00	-16.20
565.3000	-0.43	24.93	24.50	37.00	-12.50
615.0000	1.32	25.58	26.90	37.00	-10.10
713.0000	4.75	27.35	32.10	37.00	-4.90
761.3000	0.91	28.79	29.70	37.00	-7.30

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

(Above 1GHz)

Not Applicable

4.1.3.4 Radiated Emissions Test Setup Photos**Mode: IR Receiver**

Mode: IR Emitter



4.1.4 Harmonics Current Emissions Test

4.1.4.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Harmonics-1000	EMC-Partner	Harmonics-1000	2010/12/17	2011/12/16

4.1.4.1 Harmonics Current Emissions Test Data

Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	EN 61000-3-2:2006/A1:2009/A2:2009		
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>48</u> %RH	
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz		
Test Set-up	Table-top Equipment		


Test data see the next pages.

Urms = 229.9V Freq = 50 Range: 0.25 A
 Irms = 0.020A Ipk = 0.115A cf = 5.647
 P = 2.092W S = 4.687VA pf = 0.446
 THDi = 90.60% THDu = 0.10% Class A
 Test - Time : 3min -100%

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	I _{max} [A]	Limit [A]	Order	Freq. [Hz]	Iavg [A]	I _{max} [A]	Limit [A]
1	50	0.0091	0.0091		21	1050	0	0.0041	0.1071
2	100	0	0.0004	1.08	22	1100	0	0.0004	0.0836
3	150	0.0067	0.0067	2.3	23	1150	0	0.0036	0.0978
4	200	0	0.0004	0.43	24	1200	0	0.0004	0.0767
5	250	0.0066	0.0067	1.14	25	1250	0	0.0032	0.09
6	300	0	0.0004	0.3	26	1300	0	0.0004	0.0708
7	350	0.0065	0.0065	0.77	27	1350	0	0.0028	0.0833
8	400	0	0.0004	0.23	28	1400	0	0.0004	0.0657
9	450	0.0063	0.0063	0.4	29	1450	0	0.0024	0.0776
10	500	0	0.0004	0.184	30	1500	0	0.0004	0.0613
11	550	0.006	0.006	0.33	31	1550	0	0.0021	0.0726
12	600	0	0.0004	0.1533	32	1600	0	0.0004	0.0575
13	650	0.0057	0.0057	0.21	33	1650	0	0.0018	0.0682
14	700	0	0.0004	0.1314	34	1700	0	0.0004	0.0541
15	750	0.0053	0.0053	0.15	35	1750	0	0.0015	0.0643
16	800	0	0.0004	0.115	36	1800	0	0.0003	0.0511
17	850	0	0.0049	0.1324	37	1850	0	0.0013	0.0608
18	900	0	0.0004	0.1022	38	1900	0	0.0003	0.0484
19	950	0	0.0045	0.1184	39	1950	0	0.0012	0.0577
20	1000	0	0.0004	0.092	40	2000	0	0.0003	0.046

4.1.4.2 Harmonics Current Emissions Test Setup Photos

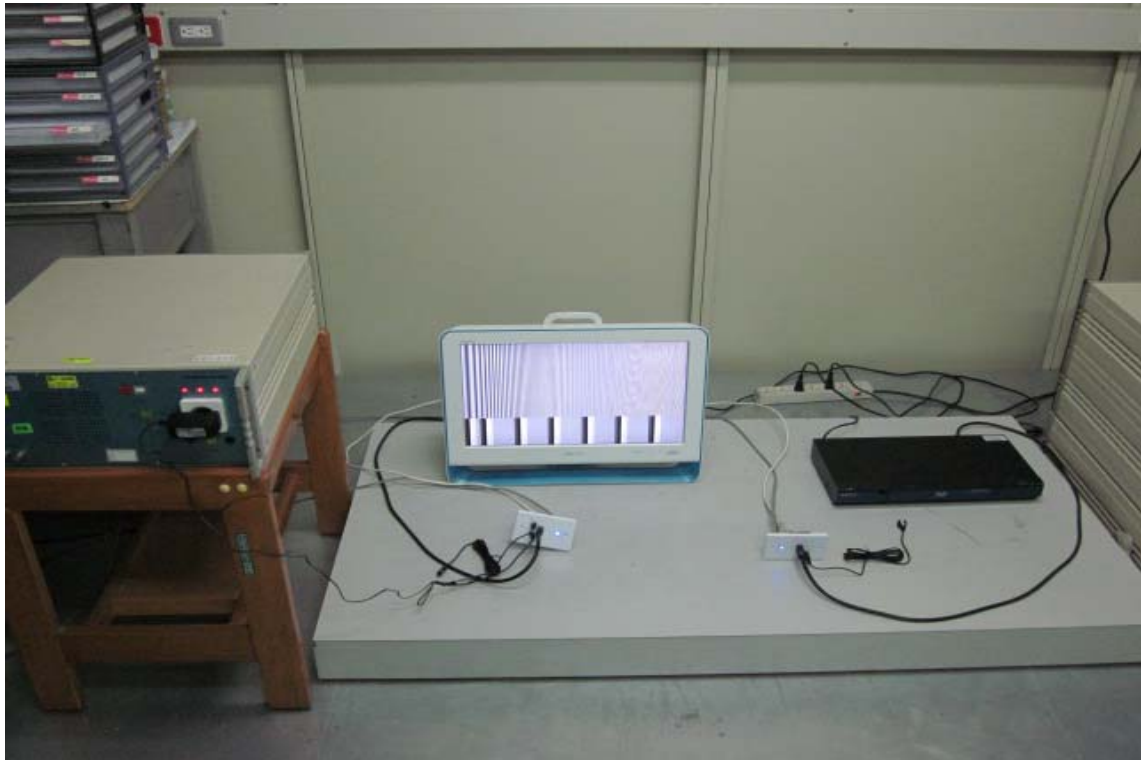

4.1.5 Voltage Fluctuations and Flicker Test

4.1.5.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Harmonics-1000	EMC-Partner	Harmonics-1000	2010/12/17	2011/12/16


4.1.5.1 Voltage Fluctuations and Flicker Test Data

Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	EN 61000-3-3:2008		
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>48</u> %RH	
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz		
Test Set-up	Table-top Equipment		

	Test Data	Limit	Pass or Fail
Plt	0.072	0.65	Pass
Pst	0.072	1.00	Pass
dt	0.00 ms	500 ms	Pass
dmax	0.00 %	4.0 %	Pass
dc	0.00 %	3.3 %	Pass

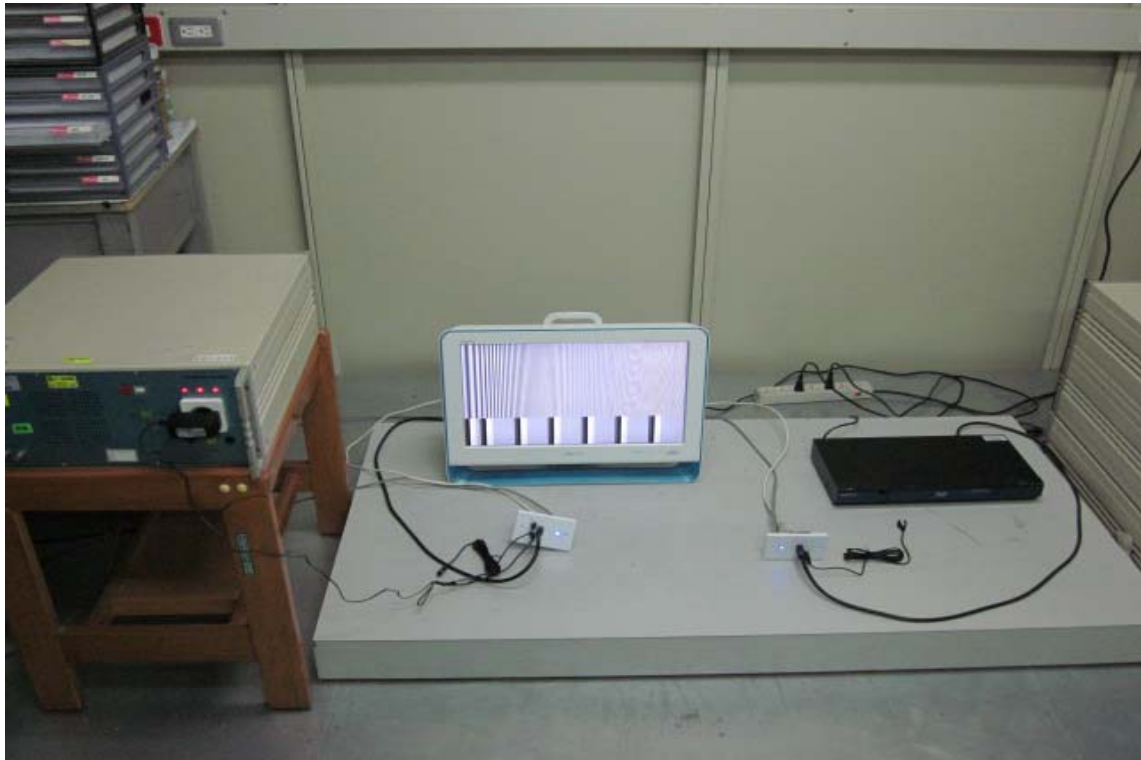4.1.5.2 Voltage Fluctuations and Flicker Test Setup Photos

4.2 Immunity

4.2.1 Electrostatic Discharge Immunity Test

4.2.1.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Electrostatic Discharge Simulator	Noiseken	ESS2002	2010/10/08	2011/10/07

4.2.1.2 Electrostatic Discharge Immunity Test Data

Test data see the next pages.

1. Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	IEC 61000-4-2:2008		
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>47</u> %RH	
	Atmospheric Pressure : 990 mbar		
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz		
Test Set-up	Table-top Equipment		

Energy-Storage Capacitor : <u>150</u> pF	Contact Discharge Times : <u>25</u> times/each condition															
Discharge Resistor : <u>330</u> Ω	Air Discharge Times : <u>10</u> times/each condition															
\ Discharge Mode	Contact Discharge								Air Discharge							
\ESD Voltage	<u>2</u> kV		<u>4</u> kV		___ kV		___ kV		<u>2</u> kV		<u>4</u> kV		<u>8</u> kV		___ kV	
\Points\Result\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
VCP	B	B	B	B	---	---	---	---	---	---	---	---	---	---	---	---
HCP	B	B	B	B	---	---	---	---	---	---	---	---	---	---	---	---
P1~P5	---	---	---	---	---	---	---	---	A	A	A	A	B	B	---	---
P6	---	---	---	---	---	---	---	---	A	A	B	B	B	B	---	---

Note : “---“means the test could not be carrier out.

“ A ” means the EUT’s function was correct normal performance during the test.

“ B” means the EUT’s function was temporary loss of function or degradation of performance during the test. After test, the EUT recovers its normal performance, without operator intervention.

TEST POINTS



2. Operating Conditions of The EUT : IR Emitter

Test Date : May 05, 2011

Test Specification	IEC 61000-4-2:2008		
Climatic Condition	Ambient Temperature: <u>27</u> °C		Relative Humidity: <u>47</u> %RH
	Atmospheric Pressure : 990 mbar		
Power Supply System	DC Power : <u>5</u> Vdc		
Test Set-up	Table-top Equipment		

Energy-Storage Capacitor	: <u>150</u> pF	Contact Discharge Times	: <u>25</u> times/each condition													
Discharge Resistor	: <u>330</u> Ω	Air Discharge Times	: <u>10</u> times/each condition													
\ Discharge Mode	Contact Discharge				Air Discharge											
\ESD Voltage	<u>2</u> kV	<u>4</u> kV	___ kV	___ kV	<u>2</u> kV	<u>4</u> kV	<u>8</u> kV	___ kV								
\Points\Result\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
VCP	B	B	B	B	---	---	---	---	---	---	---	---	---	---	---	---
HCP	B	B	B	B	---	---	---	---	---	---	---	---	---	---	---	---
P1~P5	---	---	---	---	---	---	---	---	A	A	A	A	B	B	---	---

Note : “---“means the test could not be carrier out.

“ A ” means the EUT’s function was correct normal performance during the test.

“ B” means the EUT’s function was temporary loss of function or degradation of performance during the test. After test, the EUT recovers its normal performance, without operator intervention.

TEST POINTS



4.2.1.3 Electrostatic Discharge Immunity Test Setup Photos**Mode: IR Receiver****Mode: IR Emitter**

4.2.2 RF Radiated Fields Immunity Test

4.2.2.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Antenna	AR	AT5080	N/A	N/A
signal Generator	Aglient	E4421B	2010/08/03	2011/08/02
Amplifier	Ophir	5172	N/A	N/A
Amplifier	Ophir	5127	N/A	N/A
POWER METER	Boonton	4232A	2010/08/06	2011/08/05


4.2.2.2 RF Radiated Fields Immunity Test Data

Test data see the next pages.

1. Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	IEC 61000-4-3:2006/A1:2007/A2:2010
Climatic Condition	Ambient Temperature: <u>27</u> °C Relative Humidity: <u>56</u> %RH
	Atmospheric Pressure : 990 mbar
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

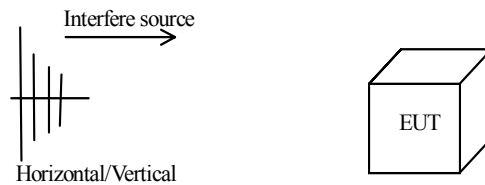


Frequency Range: <u>80</u> MHz ~ <u>1000</u> MHz	Field Strength: <u>3</u> V/m	Modulation (AM 1KHz 80%)	
Sweep Rate : $\leq 1.5 \times 10^{-3}$ decades/s	Step Size : ≤ 1 % of preceding frequency value	Dwell time : 2.9 s	
Frequency Range (MHz)	Antenna-Polarization	Direction of Device	Test Result
80~1000	Horizontal	front	A
		rear	A
		left	A
		right	A
80~1000	Vertical	front	A
		rear	A
		left	A
		right	A

Note : “A” means the EUT’s function was correct normal performance during the test.

2. Operating Conditions of The EUT : IR Emitter

Test Date : May 05, 2011

Test Specification	IEC 61000-4-3:2006/A1:2007/A2:2010	
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>56</u> %RH
	Atmospheric Pressure : 990 mbar	
Power Supply System	DC Power : <u>5</u> Vdc	
Test Set-up	Table-top Equipment	

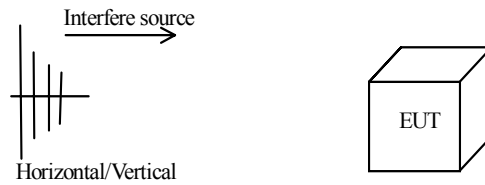

Frequency Range: <u>80</u> MHz ~ <u>1000</u> MHz	Field Strength: <u>3</u> V/m	Modulation (AM 1KHz 80%)	
Sweep Rate : $\leq 1.5 \times 10^{-3}$ decades/s	Step Size : ≤ 1 % of preceding frequency value	Dwell time : 2.9 s	
Frequency Range (MHz)	Antenna-Polarization	Direction of Device	Test Result
80~1000	Horizontal	front	A
		rear	A
		left	A
		right	A
80~1000	Vertical	front	A
		rear	A
		left	A
		right	A

Note : “A” means the EUT’s function was correct normal performance during the test.

4.2.2.3 RF Radiated Fields Immunity Test Setup Photos**Mode: IR Receiver****Mode: IR Emitter**

4.2.3 EFT/Burst Immunity Test

4.2.3.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16

4.2.3.2 EFT/Burst Immunity Test Data

Test data see the next pages.

1. Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	IEC 61000-4-4:2004/A1:2010	
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>47</u> %RH
	Atmospheric Pressure : 990 mbar	
Power Supply System	AC Power: <u>230</u> Vac <u>50</u> Hz	
Test Set-up	Table-top Equipment	

Pulse : 5 /50ns Burst : 15ms /300ms		Repetition Rate : <u>5kHz</u>		Test time : <u>1</u> min/each condition	
\Voltage\Polarity\ \Test Point\Mode\Result\ L		<u>1.0 kV</u>			
		+	-		
Power Line	N	B	B		
	L-N	B	B		
		B	B		
\Voltage\Polarity\ \Test Point\Mode\Result\ Data Link		<u>0.5 kV</u>			
		+	-		
Video Link		B	B		

Note : “B” means the EUT’s function was temporary loss of function or degradation of performance during the test. After test, the EUT recovers its normal performance, without operator intervention.

2. Operating Conditions of The EUT : IR Emitter

Test Date : May 05, 2011

Test Specification	IEC 61000-4-4:2004/A1:2010	
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>48</u> %RH
	Atmospheric Pressure : 990 mbar	
Power Supply System	DC Power : <u>5</u> Vdc	
Test Set-up	Table-top Equipment	

Pulse : 5 /50ns Burst : 15ms /300ms	Repetition Rate : <u>5kHz</u>	Test time : <u>1</u> min/each condition
\Voltage\Polarity\ \Test Point\Mode\Result\ Data Link Video Link	<u>0.5 kV</u>	
	+	-
	B	B
	B	B


Note : “B” means the EUT’s function was temporary loss of function or degradation of performance during the test. After test, the EUT recovers its normal performance, without operator intervention.


4.2.3.3 EFT/Burst Immunity Test Setup Photos

Mode: IR Receiver



Data-Video Link

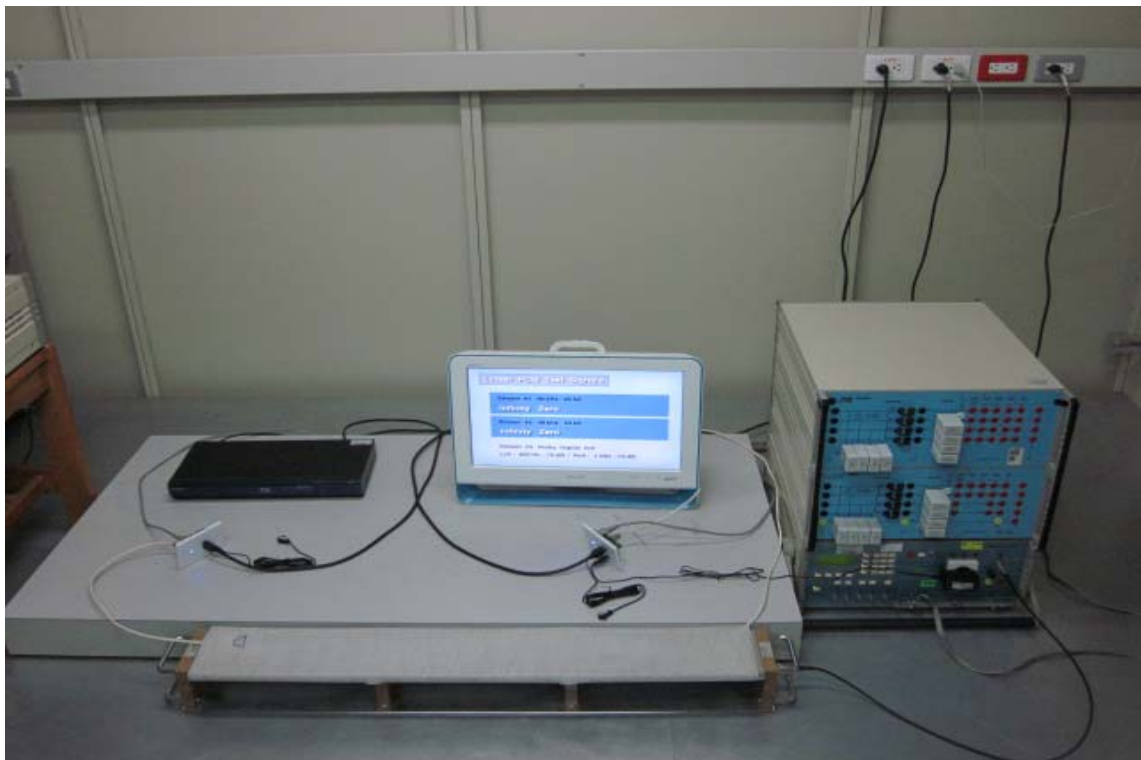

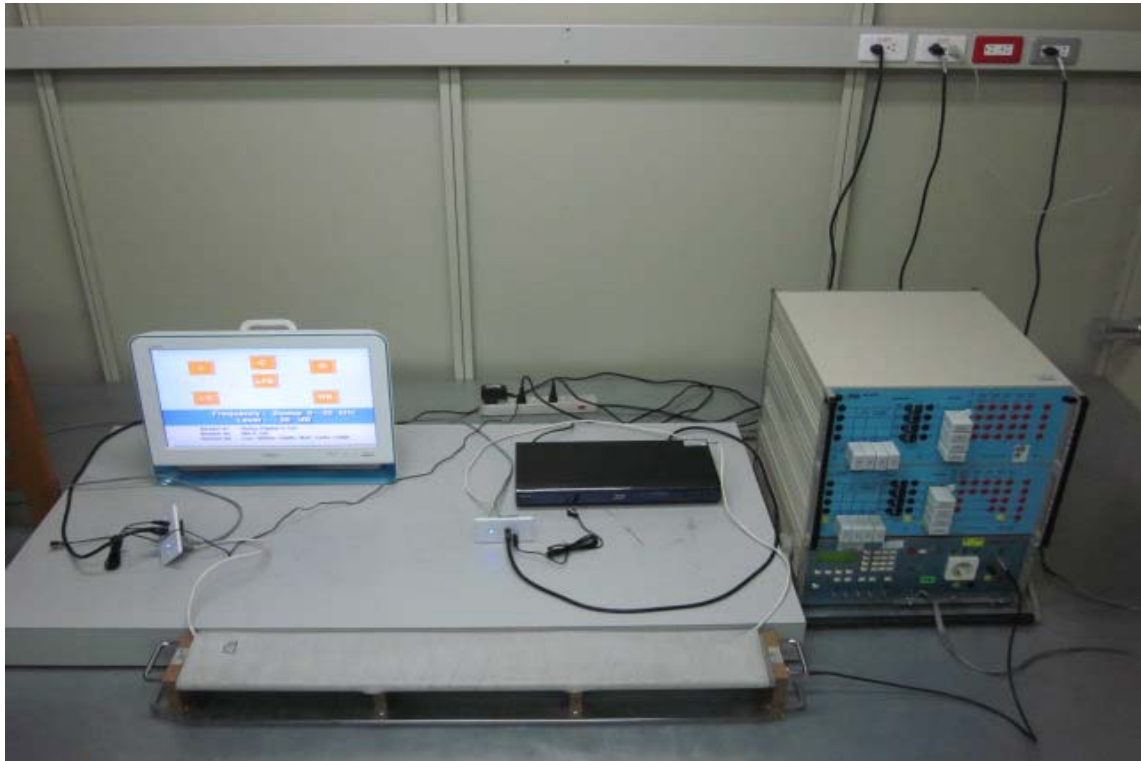Mode: IR Emitter(Data-Video Link)

4.2.4 Surge Immunity Test**4.2.4.1 Test Instruments**

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16

4.2.4.2 Surge Immunity Test Data

Test data see the next pages.

Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	IEC 61000-4-5:2005
Climatic Condition	Ambient Temperature: <u>27</u> °C Relative Humidity: <u>48</u> %RH
	Atmospheric Pressure : 990 mbar
Power Supply System	AC Power: <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Waveform : 1.2/50µs(8/20µs)		Repetition rate : <u>60</u> sec		Times : <u>5</u> time/each condition		
\Phase \Voltage \Mode \Polarity \Result			0°	90°	180°	270°
0.5kV	L – N	+	A	A	A	A
		–	A	A	A	A
1.0kV	L – N	+	B	B	B	B
		–	B	B	B	B

Note : “A” means the EUT’s function was correct normal performance during the test.

“B” means the EUT’s function was temporary loss of function or degradation of performance during the test. After test, the EUT recovers its normal performance, without operator intervention.

4.2.4.3 Surge Immunity Test Setup Photos

4.2.5 RF Common Mode Immunity Test

4.2.5.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
CS TESTER	FRANKONIA	CIT-10	2010/11/18	2011/11/17
M2+3 CDN-KIT	FRANKONIA	M2+3	2010/10/08	2011/10/07
SCHAFFUER	CS-CLAMP	KEMZ801	2010/11/18	2011/11/17

4.2.5.2 RF Common Mode Immunity Test Data

Test data see the next pages.

1. Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	IEC 61000-4-6:2008
Climatic Condition	Ambient Temperature: <u>27</u> °C Relative Humidity: <u>56</u> %RH
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Frequency Range : 0.15 MHz ~ 80 MHz		Test Level : 3 Vrms	Modulation (AM 1kHz 80%)
Sweep Rate : $\leq 1.5 \times 10^{-3}$ decades/s	Step Size : $\leq 1\%$ of preceding frequency value		Dwell Time : <u>2.9</u> s
Frequency Range (MHz)	Tested Line	Test Result	
0.15~80	M2	A	
0.15~80	Data Link (Clamp)	A	
0.15~80	Video Link (Clamp)	A	

Note : “A” means the EUT’s function was correct normal performance during the test.


2. Operating Conditions of The EUT : IR Emitter



Test Date : May 05, 2011

Test Specification	IEC 61000-4-6:2008		
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>56</u> %RH	
Power Supply System	DC Power : <u>5</u> Vdc		
Test Set-up	Table-top Equipment		

Frequency Range : 0.15 MHz ~ 80 MHz		Test Level : 3 Vrms	Modulation (AM 1kHz 80%)
Sweep Rate	: $\leq 1.5 \times 10^{-3}$ decades/s	Step Size : $\leq 1\%$ of preceding frequency value	Dwell Time : <u>2.9</u> s
Frequency Range (MHz)		Tested Line	Test Result
0.15~80		Data Link (Clamp)	A
0.15~80		Video Link (Clamp)	A

Note : “A” means the EUT’s function was correct normal performance during the test.

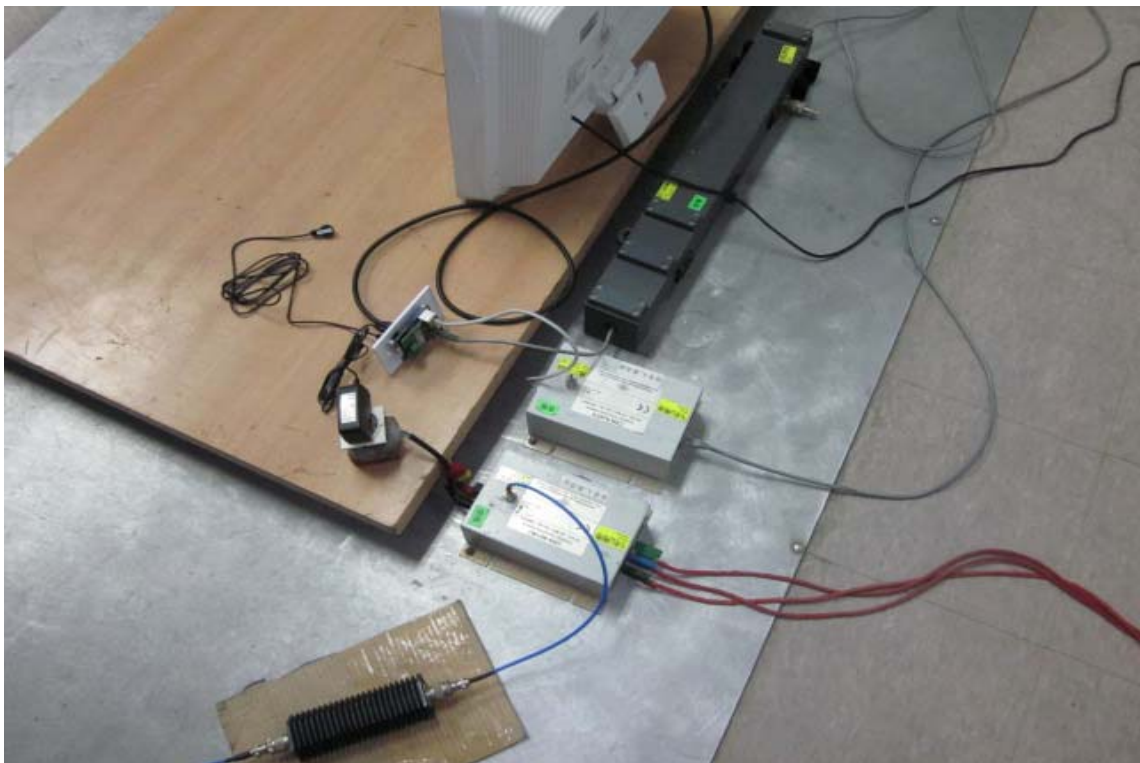4.2.5.3 RF Common Mode Immunity Test Setup Photos**Mode: IR Receiver**

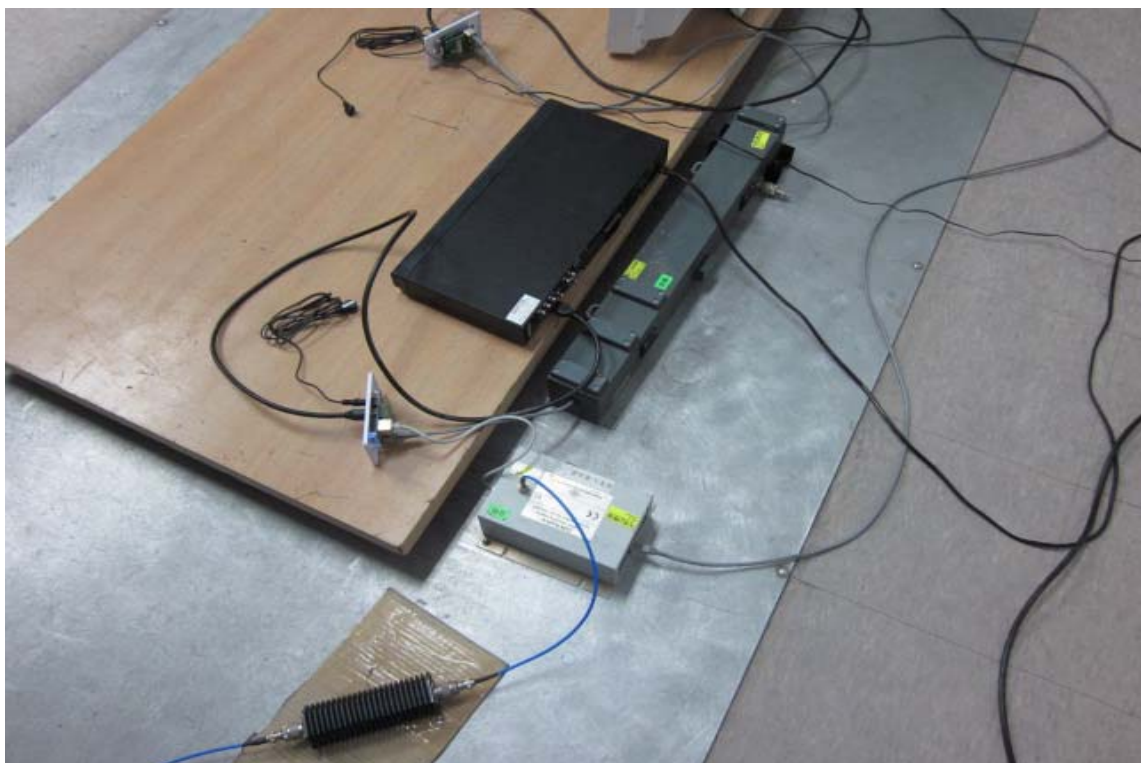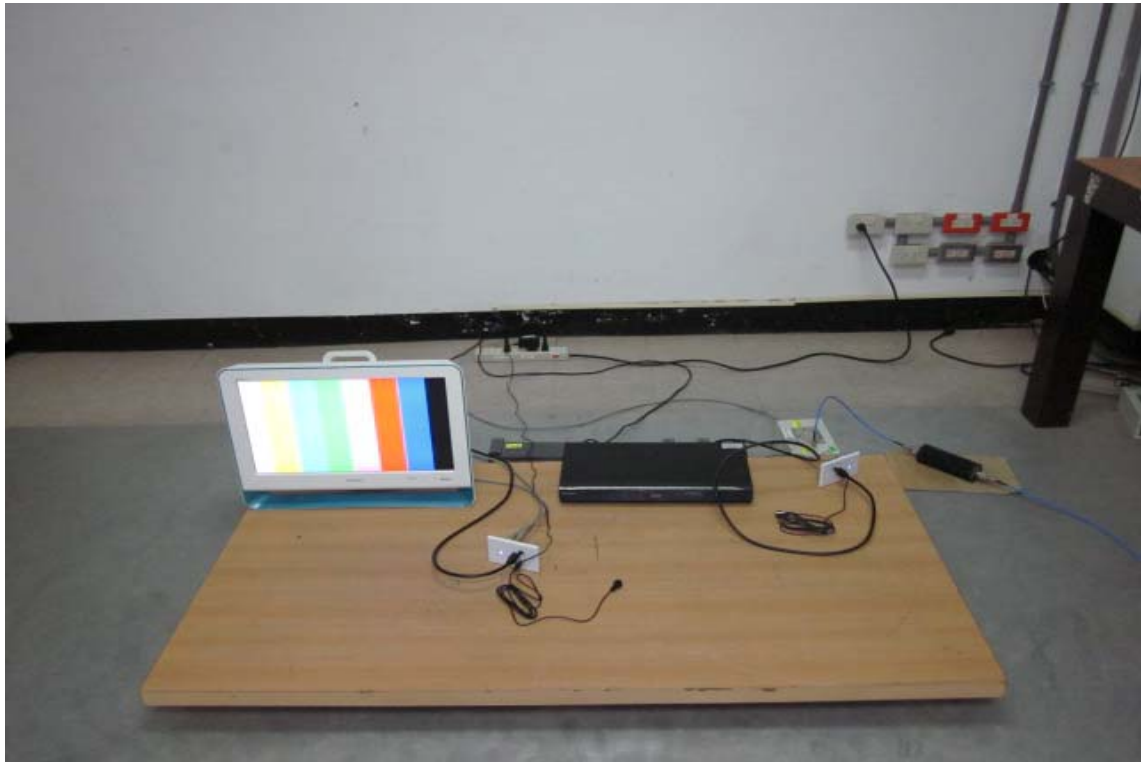Mode: IR Emitter

4.2.6 Power Frequency Magnetic Field Immunity Test

4.2.6.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16
Mfgenerator	EMC-PAPTNER	MF-1000	2011/03/09	2012/03/08




4.2.6.2 Power Frequency Magnetic Field Immunity Test Data

Test data see the next pages.

1. Operating Conditions of The EUT : IR Receiver

Test Date : May 05, 2011

Test Specification	IEC61000-4-8:2009	
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>48</u> %RH
	Atmospheric Pressure : <u>990</u> mbar	
Power Supply System	AC Power : <u>230</u> Vac <u>50</u> Hz	
Test Set-up	Table-top Equipment	






Magnetic field frequency : <u>50</u> Hz		Continuous magnetic field strength : <u>1</u> A/m	
Magnetic field direction		Testing result	
X - Axis		A	
Y - Axis		A	
Z - Axis		A	

Note : “A” means the EUT’s function was correct normal performance during the test.

2. Operating Conditions of The EUT : IR Emitter

Test Date : May 05, 2011

Test Specification	IEC61000-4-8:2009	
Climatic Condition	Ambient Temperature: <u>27</u> °C	Relative Humidity: <u>48</u> %RH
	Atmospheric Pressure : <u>990</u> mbar	
Power Supply System	DC Power : <u>5</u> Vdc	
Test Set-up	Table-top Equipment	



Magnetic field frequency : <u>50</u> Hz		Continuous magnetic field strength : <u>1</u> A/m
Magnetic field direction	Testing result	
X - Axis	A	
Y - Axis	A	
Z - Axis	A	

Note : “ A ” means the EUT’s function was correct normal performance during the test.

4.2.6.3 Power Frequency Magnetic Field Immunity Test Setup Photos

Mode: IR Receiver



Mode: IR Emitter



4.2.7 Voltage Interruptions and Voltage Dips Immunity Test

4.2.7.1 Test Instruments

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMC Immunity Tester	EMC-PARTNER	TRANSIENT-1000	2010/08/17	2011/08/16

4.2.7.2 Voltage Interruptions and Voltage Dips Immunity Test Data

Test data see the next pages.

Operating Conditions of The EUT : Operation Mode

Test Date : May 05, 2011

Test Specification	IEC 61000-4-11:2004
Climatic Condition	Ambient Temperature: <u>27</u> °C Relative Humidity: <u>48</u> %RH
Power Supply System	AC Power: <u>100</u> Vac <u>60</u> Hz; AC Power: <u>240</u> Vac <u>50</u> Hz
Test Set-up	Table-top Equipment

Test mode	Voltage dips	Durations (periods)	Interval(s)	Times	Phase	Result
Voltage interruptions	>95%	250	10	3	0°/180°	A
	>95%	300	10	3	0°/180°	A
Voltage dips in %U _T	>95%	0.5	10	3	0°/180°	A
	30%	25	10	3	0°/180°	A
	30%	30	10	3	0°/180°	A

Note : "A" means the EUT's function was correct normal performance during the test.

4.2.7.3 Voltage Interruptions and Voltage Dips Immunity Test Setup Photos



CONSTRUCTED PHOTOS of EUT**Mode: IR Receiver**

1. Top View of EUT



2. Side View of EUT




CONSTRUCTED PHOTOS of EUT

3. Side View of EUT




4. Bottom View of EUT

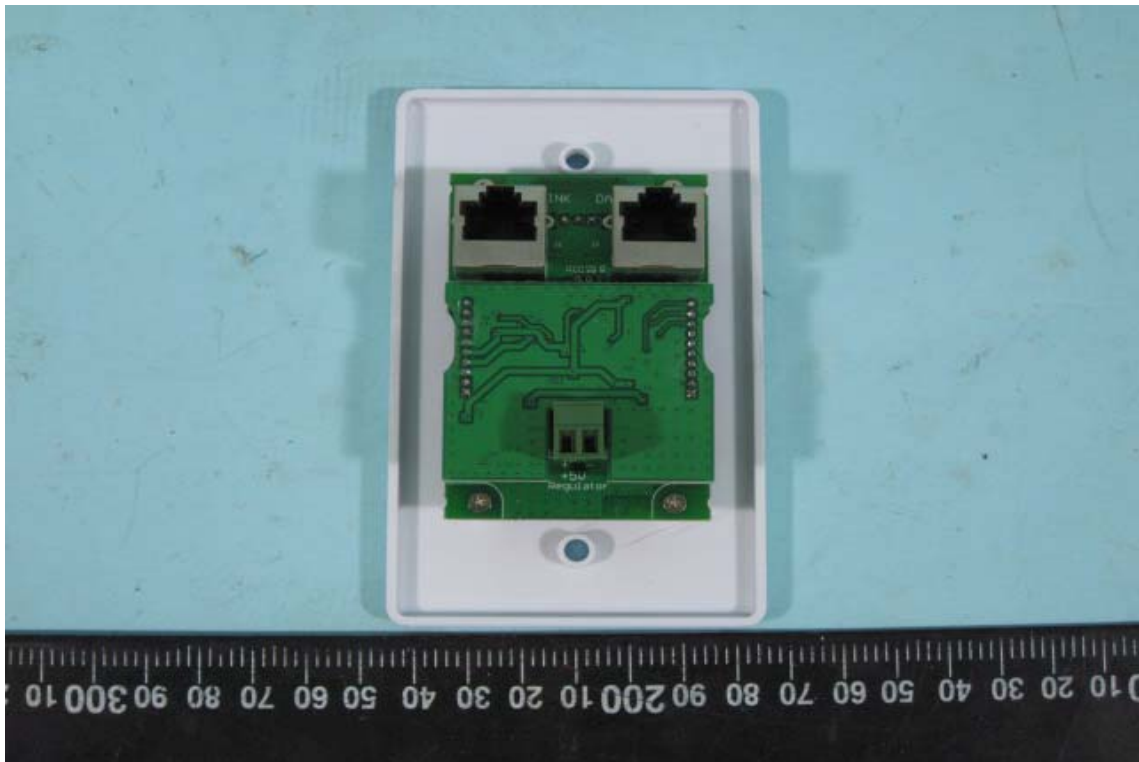


CONSTRUCTED PHOTOS of EUT

5. Internal View of EUT

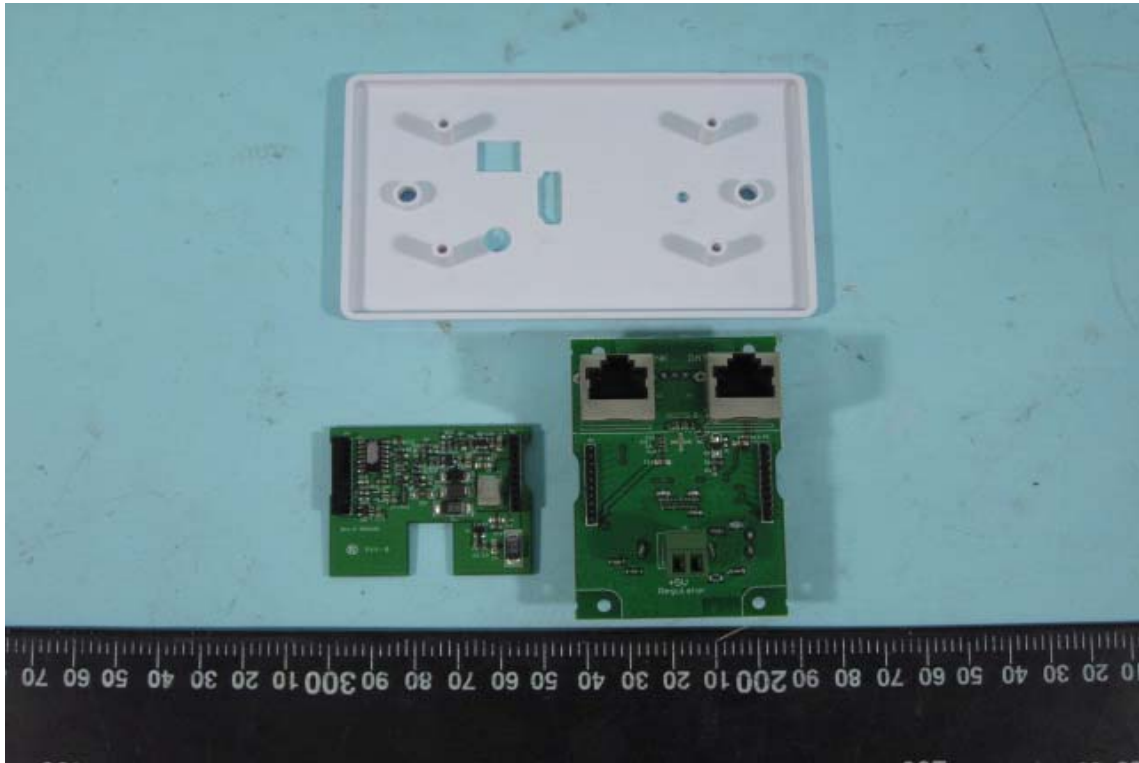


CONSTRUCTED PHOTOS of EUT

6. Component View of EUT

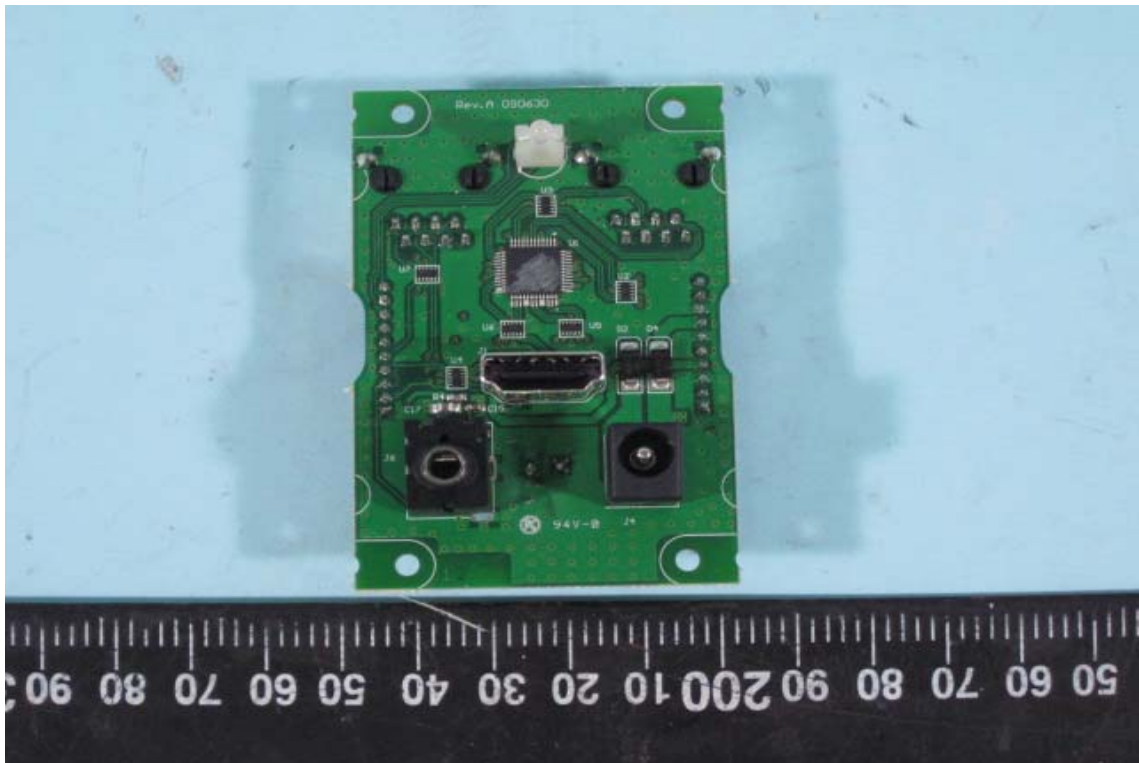


7. Solder View of PCB

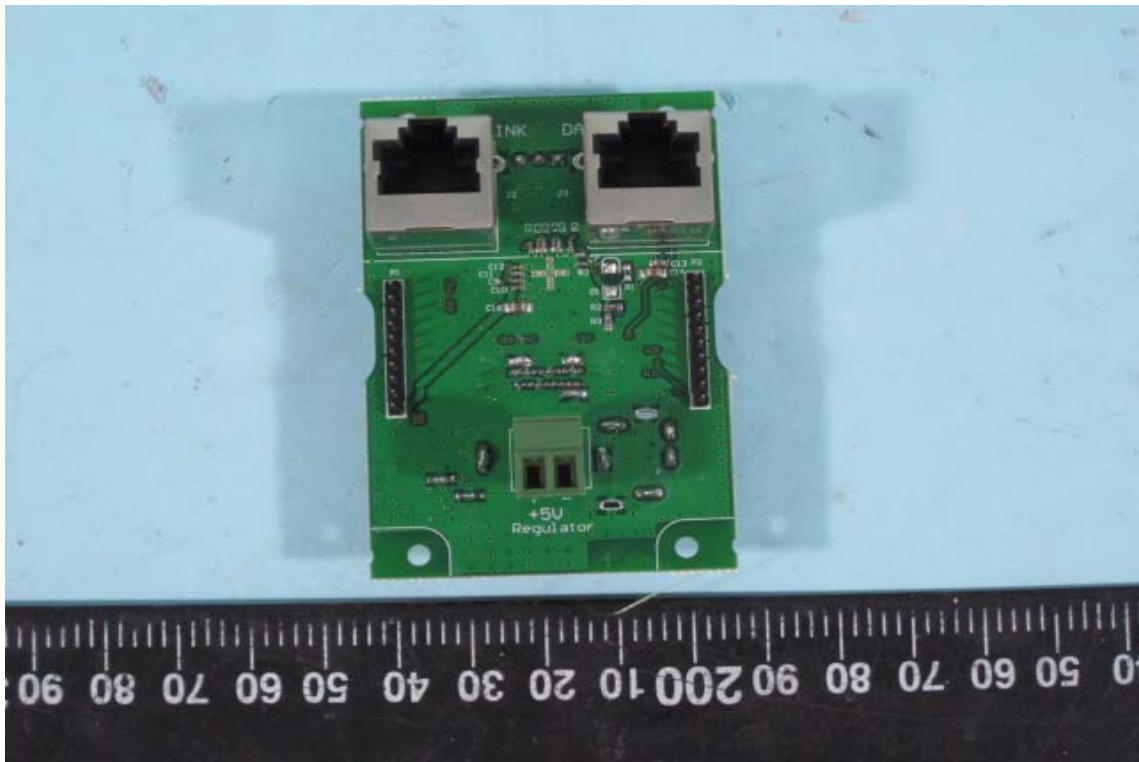

CONSTRUCTED PHOTOS of EUT**Mode: IR Emitter**

1. Top View of EUT

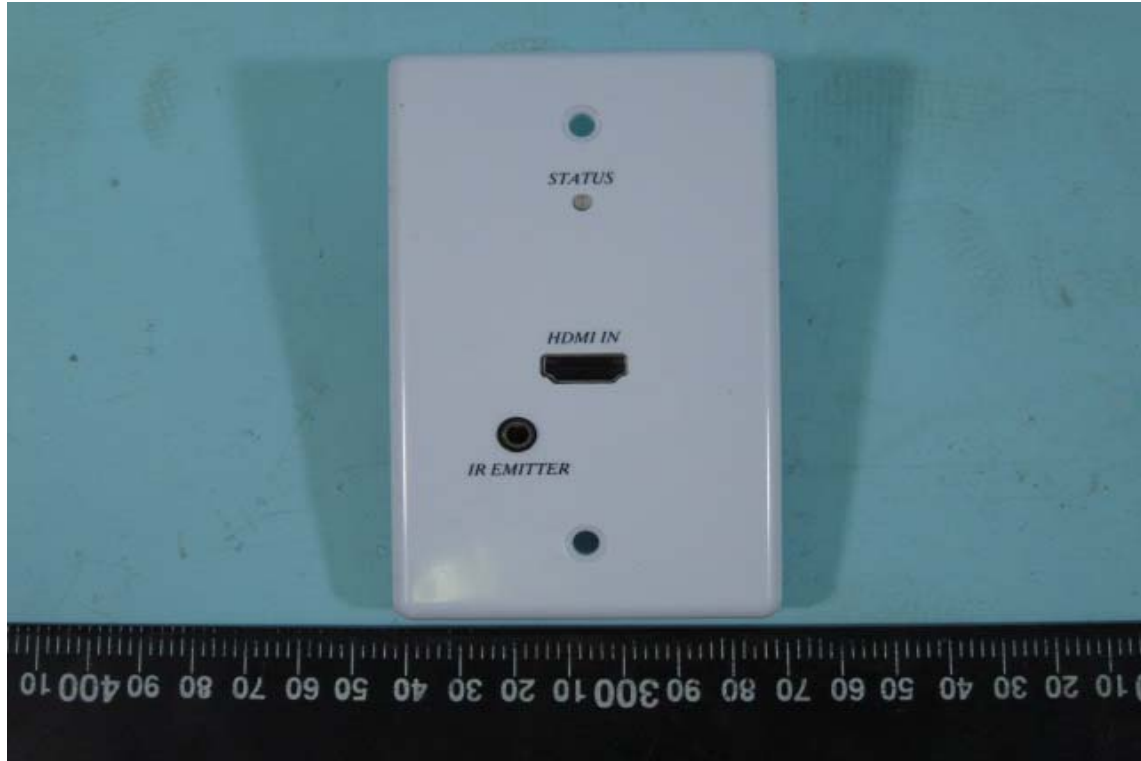


2. Side View of EUT



CONSTRUCTED PHOTOS of EUT

3. Side View of EUT

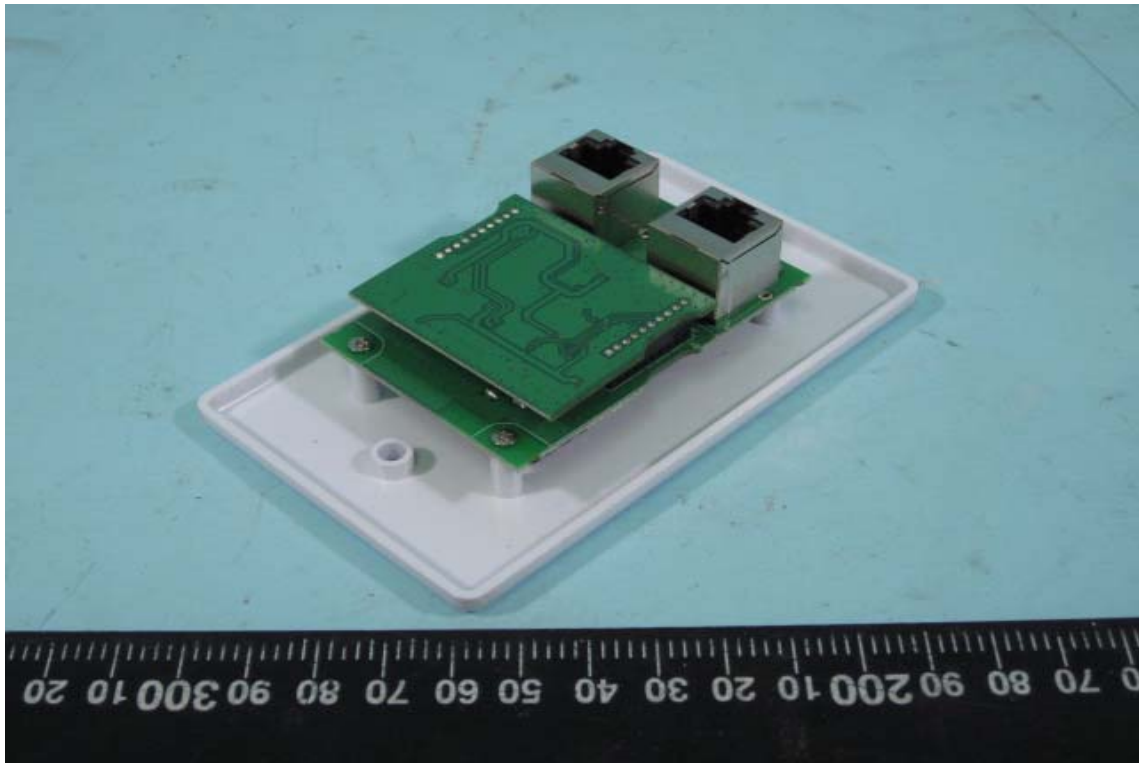


4. Bottom View of EUT




CONSTRUCTED PHOTOS of EUT

5. Internal View of EUT

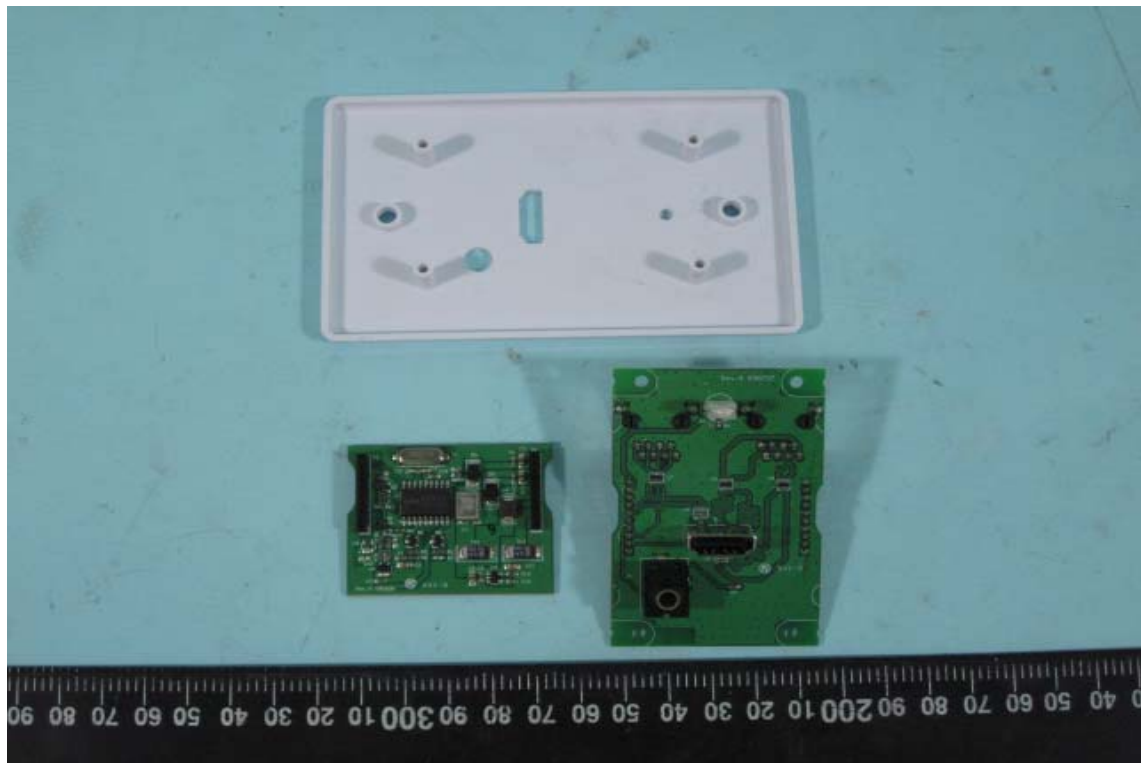


CONSTRUCTED PHOTOS of EUT

6. Component View of EUT

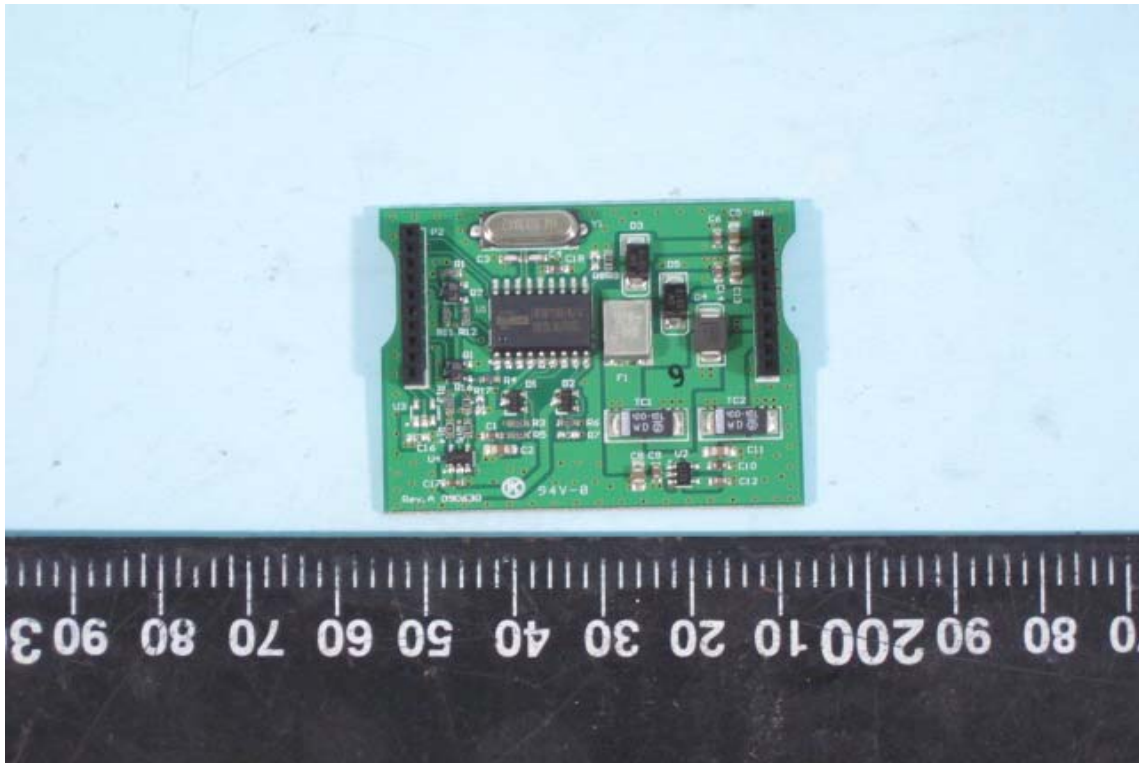


7. Solder View of PCB

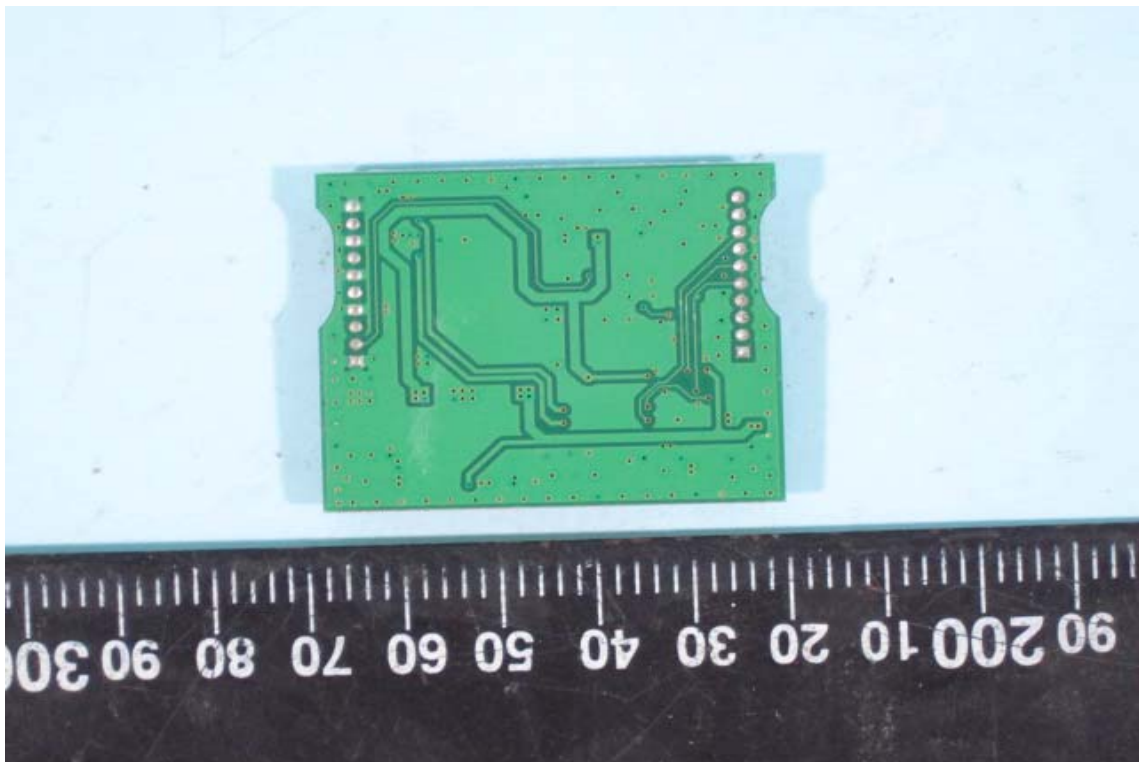


CONSTRUCTED PHOTOS of EUT

8. Component View of EUT

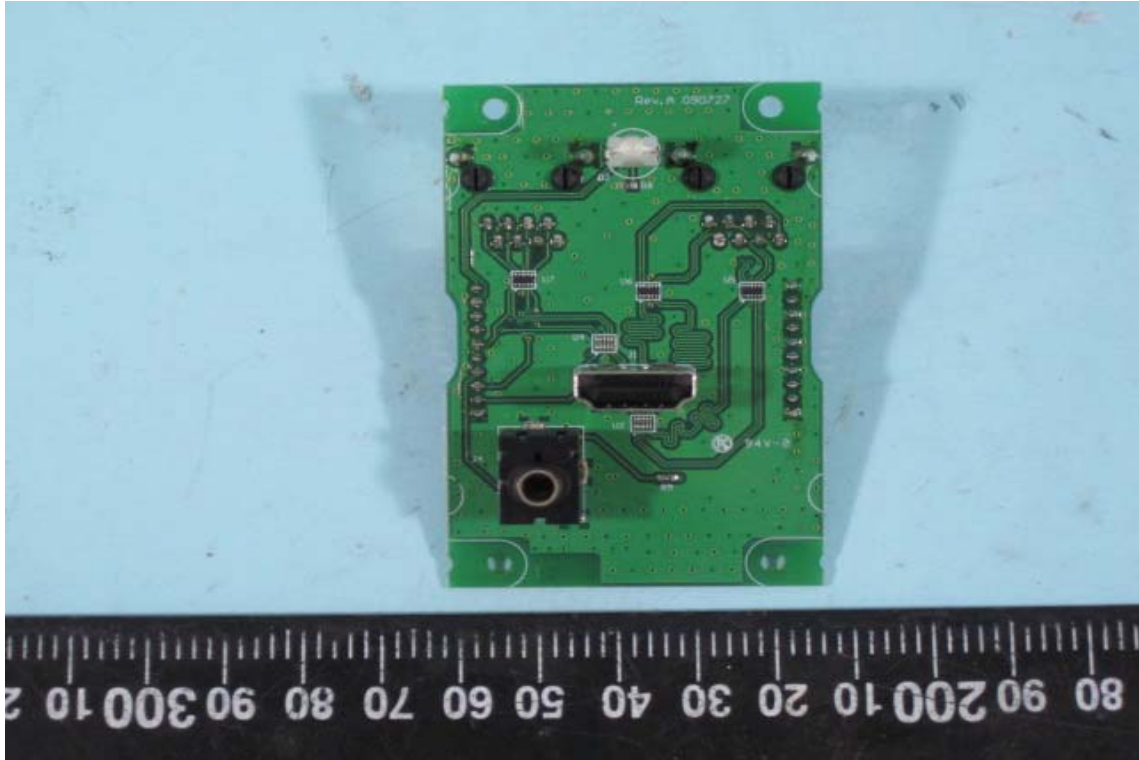

9. Solder View of PCB

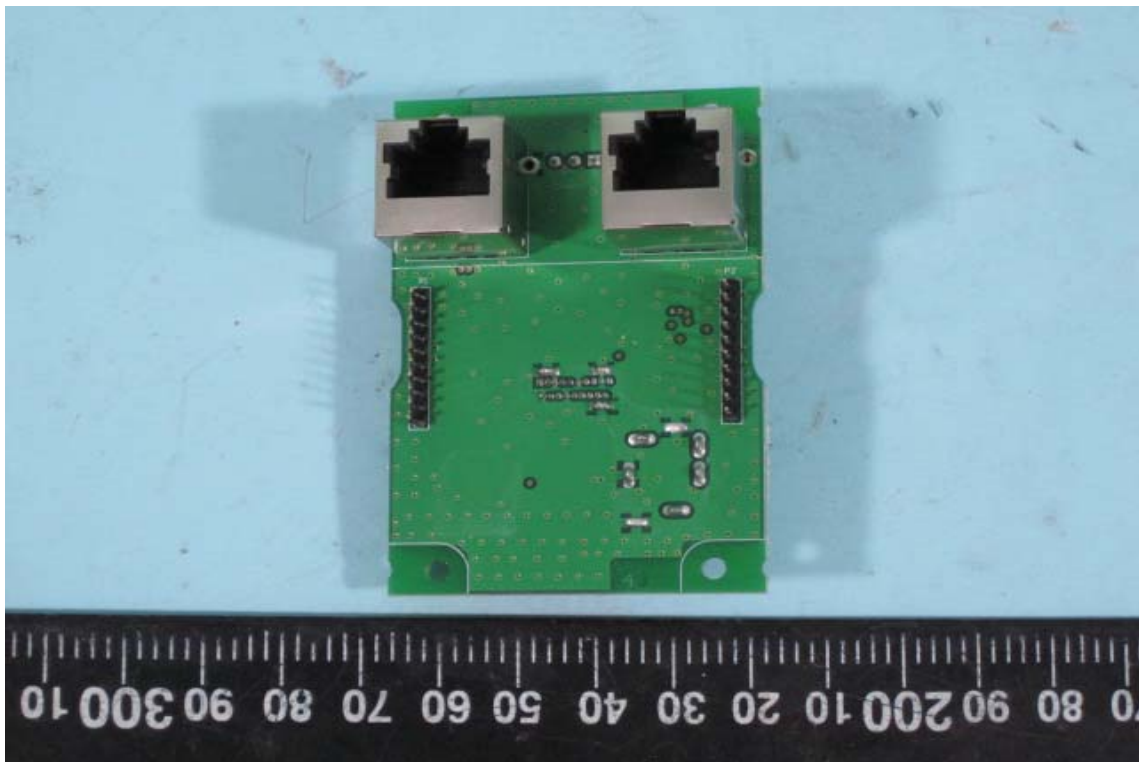


CONSTRUCTED PHOTOS of EUT**Adapter**

1. Total View of Adapter




2. Side View of Adapter

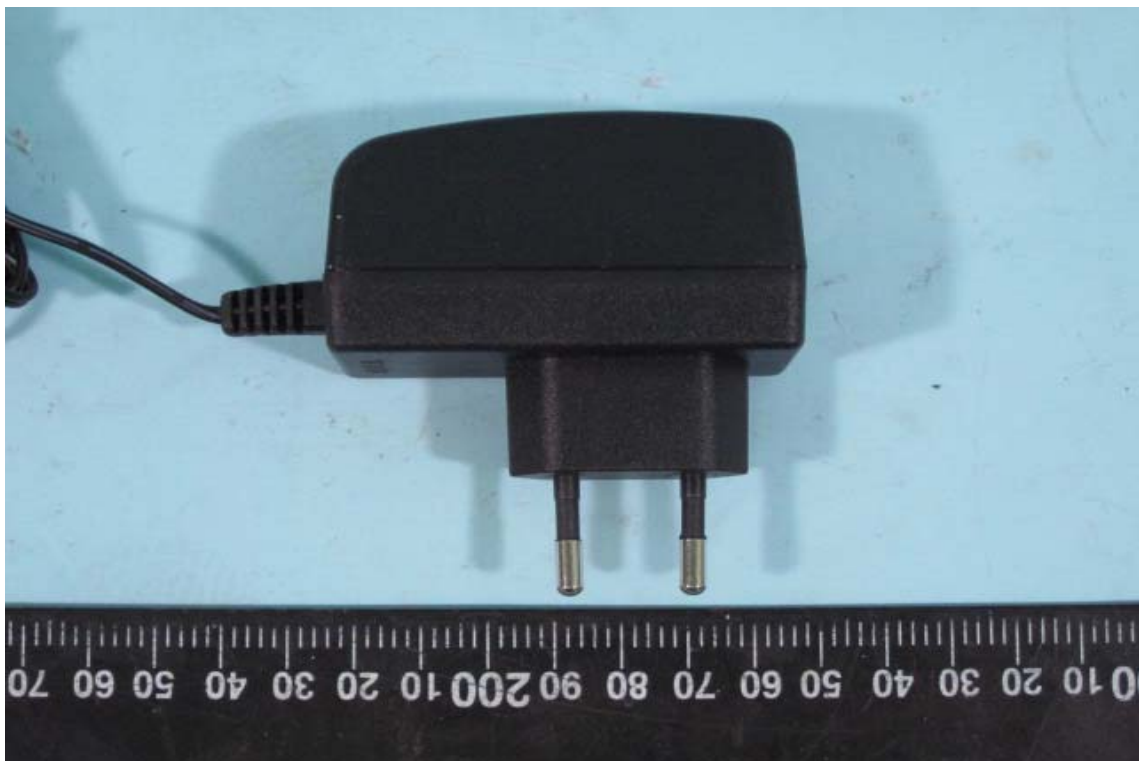

CONSTRUCTED PHOTOS of EUT

3. Side View of Adapter

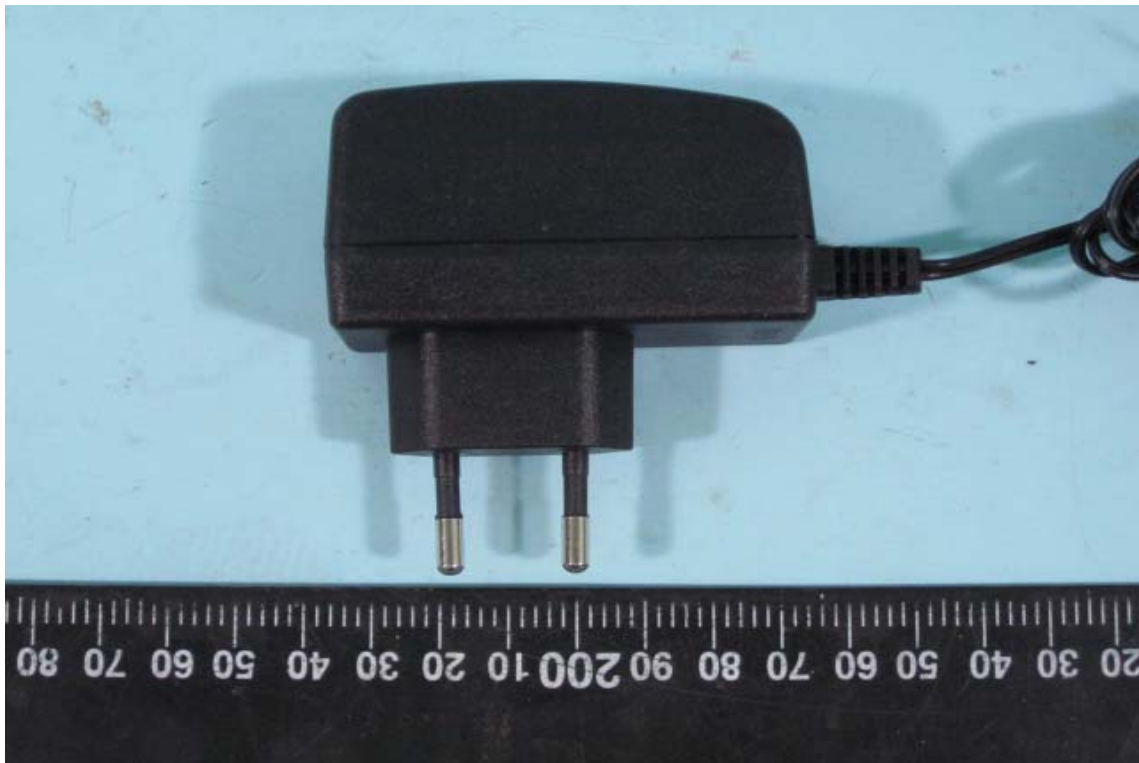

4. Side View of Adapter



CONSTRUCTED PHOTOS of EUT

5. Side View of Adapter

