

TWISTED PAIR TRANSMISSION SYSTEM – Passive Series

ITEM NO.: TTP111VE , TTP111VEL



TTP111VE

- BNC male to screw terminal for easy connection.
- Compact and mini size, could mount multiple units behind multiplexer, Quad, DVR..etc
- Transmit a full color video signal up to 300 meters.
- Passive, No power required.
- Eliminate Coaxial Cable.
- Distance Up to 1Km when used with an active receiver such as TTA111VH, TTA111(V)AV, TTA414VR, TPA008, TPA016.

TTP111VEL


- BNC male to screw terminal with 10cm mini coax cable for easy connection.
- Compact and mini size, could mount multiple units behind multiplexer, Quad, DVR..etc.
- Transmit a full motion monochrome video signal up to 600 meters, color video signal up to 300 meters.
- Passive, No power required.
- Eliminate Coaxial Cable.

Panel View:


TTP111VE



TTP111VEL



Installation View:

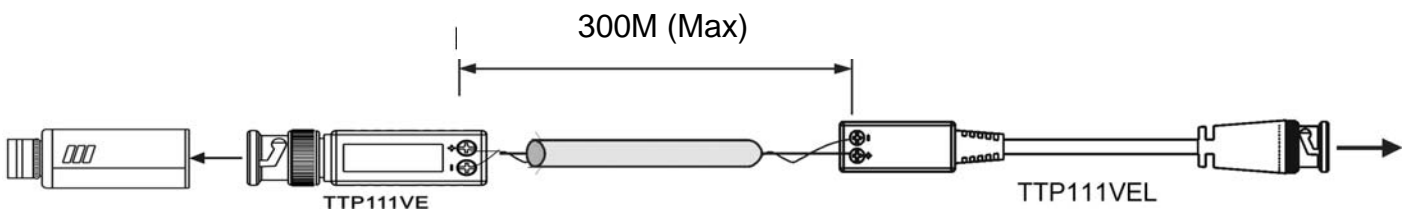

This installation should be made by a qualified service person and should conform to all local codes.

Specification:

ITEM NO.	TTP111VE	TTP111VEL
Video Input / Output Terminals	BNC MALE (75Ω · 1V p-p)	
Video Onput / Iutput Terminals	TERMINAL BLOCK	
Bandwidth	50Hz ~ 6MHz (-3dB)	
Transmission Distance	300 Meters (Max)	
Temperature	Operation: 0 to 55°C, Storage: -20 TO 85°C, Humidity: up to 95%	
Dimension mm	14.5 × 49.5 × 15.5	14.5 × 15.5 × 145, include 100mm mini coax cable
Weight	18	25

