



TWISTED PAIR TRANSMISSION SYSTEM – Passive Series

ITEM NO.: TTP111VP-TLK (TTP111VP-T+TTP111VP-TL)

Features:


- Video & power transmission over one standard CAT 5 cable.
- Package including TTP111VP-T (6 pin terminal to BNC type), TTP111VP-TL (Pigtail type, RJ45 to BNC with DC power jack for easy mounting at DVR side.)
- Eliminate coaxial & power cable.
- Fast, easy installation, saving time and money.
- Substantial saving on the cost of the cable itself.
- Application for color video signal up to 300 meters, B/W to 600 meters.
- Refer the page 2. “Voltage Drop According to Cable Length” for power transmission range.

Installation View:

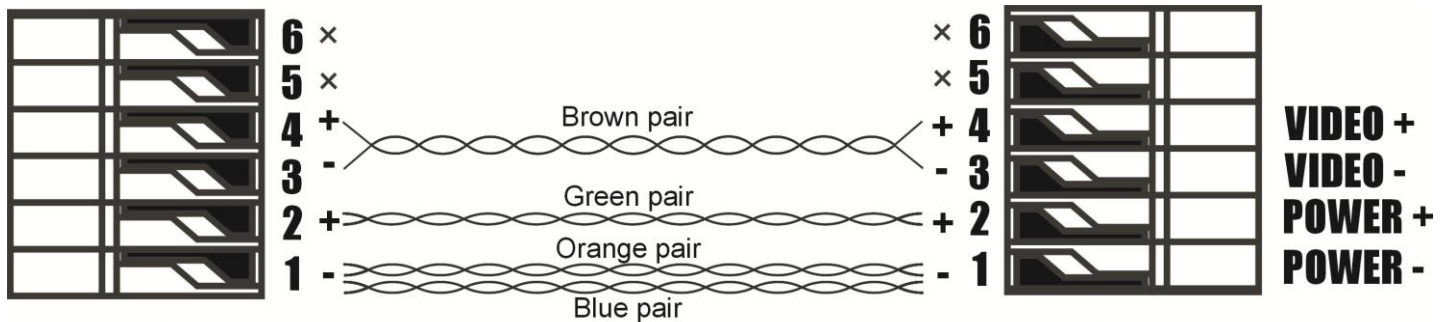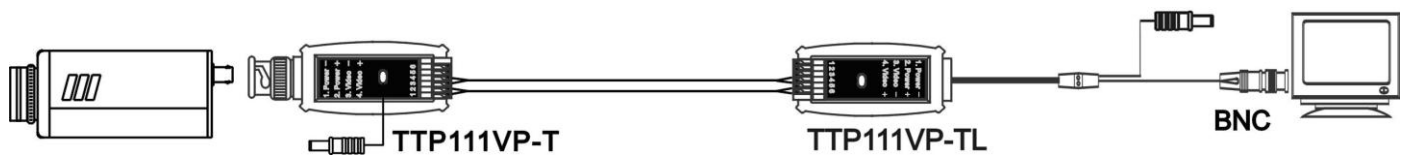

Note: The Blue pair can be split and used to supplement the conductors on terminals 1 to extend the power transmission distance.

Panel View:

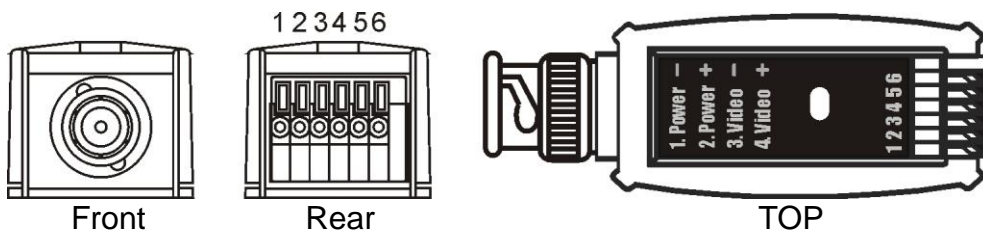

ITEM NO.	TTP111VP-T	TTP111VP-TL
VIDEO INPUT	BNC x 1 (75 Ω · 1 Vp-p)	
INTERFACE	RJ45 x 1	
POWER	Pass Through	
TEMPERATURE	Operation: 0 to 55°C, Storage: -20 TO 85°C, Humidity: up to 95%	
RECOMMEND CABLE	CAT.5 UTP (24 AWG)	
DIMENSIONS mm	69 x 25 x 20.7 + 140mm power cord	65x25.4x25.4 with 25cm cable
WEIGHT g	36	45

Voltage Drop According to Cable Length (24AWG):

Power	DC12V								
Range	50M			100M			300M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	11.4	11.7	11.8	10.8	11.3	11.6	9.6	10.6	11
100mA	11	11.5	11.5	9.7	10.8	11.2		9.2	10.1
150mA	10.5	11.2	11.3	9	10.4	10.9			9.3
200mA		11	11.2		9.9	10.6			
250mA		10.7	11		9.4	10.2			
300mA		10.5	10.8			9.9			
350mA		10.3	10.6			9.7			
400mA		10	10.4			9.4			
450mA		9.6	10.2						
500mA		9.2	9.8						

Voltage	DC15V											
Range	50M			100M			300M			600M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	14.4	14.7	14.8	13.8	14.3	14.6	11.9	13.6	14	X	12	12.9
100mA	14	14.5	14.5	12.7	13.8	14.2	X	12.2	13.1	X	X	11.1
150mA	13.5	14.2	14.3	12	13.4	13.9	X	11.1	12.3	X	X	X
200mA	12.6	14	14.2	11.3	12.9	13.6	X	X	11.5	X	X	X
250mA	12.1	13.7	14	10.3	12.4	13.2	X	X	X	X	X	X
300mA	11.8	13.5	13.8	X	12	12.9	X	X	X	X	X	X
350mA	11.3	13.3	13.7	X	11.7	12.7	X	X	X	X	X	X
400mA	10.8	13	13.5	X	11.2	12.4	X	X	X	X	X	X
450mA	X	12.7	13.3	X	10.7	12.1	X	X	X	X	X	X
500mA	X	12.4	13.1	X	X	11.6	X	X	X	X	X	X

Voltage	DC24V											
Range	50M			100M			300M			600M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	23.8	23.8	23.8	23	23.5	23.6	21	22.4	23	18.1	21.2	22.1
100mA	23.6	23.4	23.5	22.4	23.1	23.3	18.7	21.1	22.2	12.9	18.7	20.4
150mA	22.6	23.2	23.3	21.3	22.6	22.9	16.2	20	21.3	X	16.1	18.9
200mA	22.1	22.9	23.1	20.3	22	22.5	13.7	18.1	20.5	X	13.5	17.1
250mA	21.6	22.6	22.9	19.4	21.6	22.2	10.9	17.4	19.6	X	11.1	15.4
300mA	21.1	22.4	22.7	18.4	21.2	21.9	X	16.1	18.8	X	X	13.8
350mA	20.6	22.1	22.5	17.5	20.6	21.6	X	15	18.1	X	X	12.2
400mA	20.2	21.8	22.3	16.5	20.1	21.2	X	13.9	17.3	X	X	10.7
450mA	19.7	21.6	22.1	15.5	19.6	20.9	X	12.7	16.6	X	X	X
500mA	19.1	21.3	21.9	14.5	19.1	20.5	X	11.3	15.4	X	X	X

	CAT-5 Cable	CAT-5 Cable
UTP CABLE AWG	24 AWG/2 pairs	24 AWG/3pairs
Power Supply Voltage	AC24V	AC24V
Camera Power Consumption	100 mA	300 Meters
	300mA	100 Meters
	1AMP	30 Meters