


TWISTED PAIR TRANSMISSION SYSTEM – Passive Series

ITEM NO.: TTP111VP3K


TTP111VP3K Video & Power Transceiver for AC24V Camera (3 pairs)

- Video (one pair) and remote power (3pairs) transmission over one 4pairs CAT5 cable.
- Transmission range up to 300 meters (max.)
- BNC for video, power cord for power, RJ45 female output for video and power.
- Eliminates costly coaxial cables and minimize installation time.
- Use with TPP016VPD for 16 channel video, power over professional CAT5 RJ45 connection.

Product Overview:



Installation View:

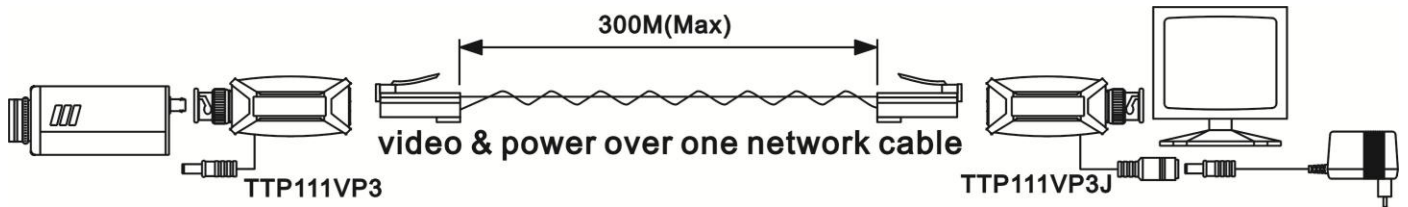

RJ-45 Jack Pin Define

RJ - 45 Jack		
PIN	Color	Function
1	W-O	POWER -
2	O	POWER +
3	W-G	POWER -
4	BL	POWER +
5	W-BL	POWER -
6	G	POWER +
7	W-BR	Video +
8	BR	Video -

JACK POSITION

NOTE : These devices is reversible, BNC connector = RJ45

PAIR1 & PAIR2 & PAIR3 : POWER → POWER+ : PIN 2, PIN 6, PIN 4, POWER- : PIN 1, PIN 3, PIN 5

PAIR4 : VIDEO

Specification:

ITEM NO.	TTP111VP3K
Video (BNC Connector)	1 (1V p-p, 75 Ohms)
Transmission Interface	RJ45
Transmission Distance	300M
Cable	Twisted Pair CAT5 (AWG24)
Temperature	Operation: 0 to 55°C, Storage: -20 TO 85°C, Humidity: up to 95%
Dimension W x H x D mm	69 x 25 x 20.7 + 140mm power cord
Weight g	35



Rev . B

Voltage Drop According to Cable Length (24AWG):

Power	Power Supply Voltage 12 Volts DC								
Range	50M			100M			300M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	11.4	11.7	11.8	10.8	11.3	11.6	9.6	10.6	11
100mA	11	11.5	11.5	9.7	10.8	11.2		9.2	10.1
150mA	10.5	11.2	11.3	9	10.4	10.9			9.3
200mA		11	11.2		9.9	10.6			
250mA		10.7	11		9.4	10.2			
300mA		10.5	10.8			9.9			
350mA		10.3	10.6			9.7			
400mA		10	10.4			9.4			
450mA		9.6	10.2						
500mA		9.2	9.8						

Voltage	DC15V											
Range	50M			100M			300M			600M		
Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	14.4	14.7	14.8	13.8	14.3	14.6	11.9	13.6	14	X	12	12.9
100mA	14	14.5	14.5	12.7	13.8	14.2	X	12.2	13.1	X	X	11.1
150mA	13.5	14.2	14.3	12	13.4	13.9	X	11.1	12.3	X	X	X
200mA	12.6	14	14.2	11.3	12.9	13.6	X	X	11.5	X	X	X
250mA	12.1	13.7	14	10.3	12.4	13.2	X	X	X	X	X	X
300mA	11.8	13.5	13.8	X	12	12.9	X	X	X	X	X	X
350mA	11.3	13.3	13.7	X	11.7	12.7	X	X	X	X	X	X
400mA	10.8	13	13.5	X	11.2	12.4	X	X	X	X	X	X
450mA	X	12.7	13.3	X	10.7	12.1	X	X	X	X	X	X
500mA	X	12.4	13.1	X	X	11.6	X	X	X	X	X	X

Voltage	DC24V											
Range	50M			100M			300M			600M		
Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	23.8	23.8	23.8	23	23.5	23.6	21	22.4	23	18.1	21.2	22.1
100mA	23.6	23.4	23.5	22.4	23.1	23.3	18.7	21.1	22.2	12.9	18.7	20.4
150mA	22.6	23.2	23.3	21.3	22.6	22.9	16.2	20	21.3	X	16.1	18.9
200mA	22.1	22.9	23.1	20.3	22	22.5	13.7	18.1	20.5	X	13.5	17.1
250mA	21.6	22.6	22.9	19.4	21.6	22.2	10.9	17.4	19.6	X	11.1	15.4
300mA	21.1	22.4	22.7	18.4	21.2	21.9	X	16.1	18.8	X	X	13.8
350mA	20.6	22.1	22.5	17.5	20.6	21.6	X	15	18.1	X	X	12.2
400mA	20.2	21.8	22.3	16.5	20.1	21.2	X	13.9	17.3	X	X	10.7
450mA	19.7	21.6	22.1	15.5	19.6	20.9	X	12.7	16.6	X	X	X
500mA	19.1	21.3	21.9	14.5	19.1	20.5	X	11.3	15.4	X	X	X

AC24V Power Distance Chart over UTP cable:

CAT5 Cable (24AWG)	Range
2 PAIRS/AC24V	
100 mA	300 Meters
300mA	100 Meters
1 Amp	30 Meters