

Coaxial Cabling : HD-CVI/TVI/AHD Distributor & Video Amplifier

ITEM NO.: CD102HD HD-CVI/TVI/AHD 1 in 2 out Video Distribution Amplifier



CD102HD is 1 input 2 output HD-CVI/TVI/AHD Video distributor with amplifier function. They are suitable for far distance, different floor in a building or different electrical field.

CD102HD HD-CVI/TVI/AHD 1 in 2 out Video Distribution Amplifier


Features:

- 1 input 2 output HD video distributor.
- Input cable distance: 720p 500M(Max),1080p: 200M (Max)
- Output cable distance 100M (Max)

Installation View:



Panel View:

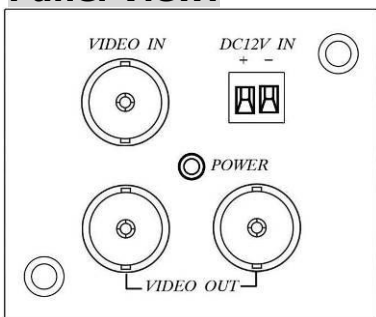

LED Indication:

GREEN
ON Power ON
OFF Power OFF

Cable:

Link cable recommend to use high quality 75Ω Coaxial Cable and BNC connector, low quality coaxial cable may case signal loss and effect transmission distance and reliability.

Specifications:

ITEM NO.	CD102HD
Video Input Channel	BNC x 1
Video Output Channel	BNC x 2
Video Input Level	0.8~1.2Vp-p, 75 Ohms
Video Output Level	1Vp-p (Standard), 75 Ohms
Video Bandwidth	350 MHz -3dB
Power Supply	DC12V 500mA
Power Consumption	160mA
Temperature	Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: up to 95%
Dimensions mm	57.8 x 49.2 x 41.7
Weight g	70



Rev. A