

# HI PERFORMANCE VIDEO GROUND LOOP ISOLATOR SERIES

ITEM NO.: TGP001HT

The TGP001HT Video Ground Loop Isolator is passive devices which reduce Ground Loop Interference with CCTV signals and can easily install in a new or added to existing systems. It is useful where a video signal is transmitted via cable between points with different ground potentials, Differences in ground potentials are typically caused by unbalanced power line loads.

## TGP001HT Hi Performance Twisted Pair Ground Loop Isolator Features:


- BNC male to terminal block with 24cm mini coax cable.
- Passive type, no power need.
- **Install at camera side.**
- Hi Performance to eliminate ground loop problem.
- Low video loss , Bandwidth: 20hz -11Mhz ,+0/-3Db.
- Prevents video-signal distortion caused by video ground loops.
- Eliminates picture tearing, cross talk and rolling.
- Prevents power cables laid by others interfering with the CCTV system.



## Installation View:

The Video Ground Loop Isolator should be installed where runs of video cable are known to have ground loops. It must be installed in the video cable that has come directly from the camera, but before the cable has been connected to anything else.

If several video cameras come from the same area, fix a Video Ground Loop Isolator In every cable, or a ground loop will still remain.

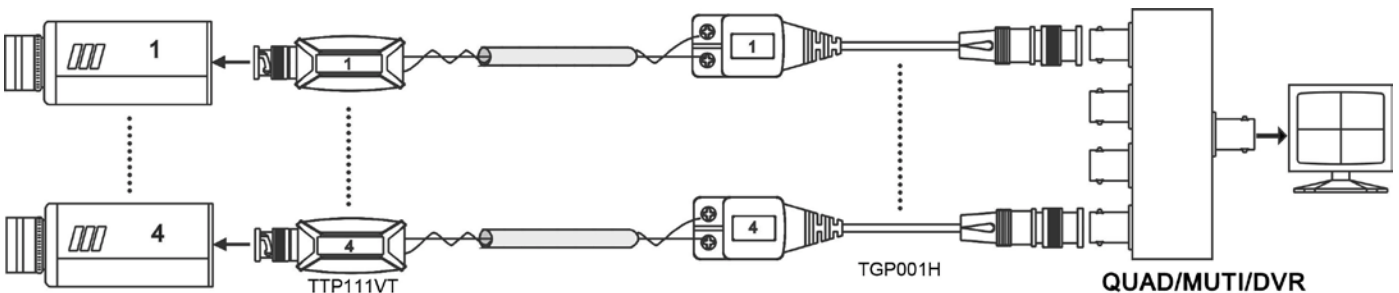

**Specification:**

<b>ITEM NO.</b>	<b>TGPO01HT</b>
Insertion Loss	<0.5dB
Bandwidth	20Hz -11MHz, +0/-3dB
Input Resistance	75 ohm
Output Resistance	75 ohm
Ground loop rejection	>90dB @>50Hz
Isolation Voltage	600VDC (Min)
Insulation Resistance	100m Ohm
Transient Voltage Suppressors	12 Vrms
Material	ABS Plastic
Dimensions mm	78.3x28x27.5 with 24cmx2 cable
Weight g	76

RoHS   

Rev. B