

S-VIDEO BALUN

ITEM NO. : SE01




The S-VIDEO BALUN allows S-Video to be connected via UTP cable. Used in pairs, the S-VIDEO BALUN eliminates coaxial cables. To be used in home or commercial applications as a smart, fast, cost-effective means of connecting S-Video equipment using twisted pair instead of coax cable. Ideal for classroom audio-video distribution, overhead projector systems, PC-training systems, and tradeshow PC-demo systems in the S-video environment.


Features:

- RJ45 female to 4-Pin Mini Din pigtail cable (for S-Video).
- Designed for S-VIDEO Signal transmission over CAT 5 UTP cable.
- Up to 300 meters in color via CAT 5 UTP cable.
- Including one 20cm S-VIDEO cable for quicker movers, adds and changes, longer distance than S-video cable.

Installation View:

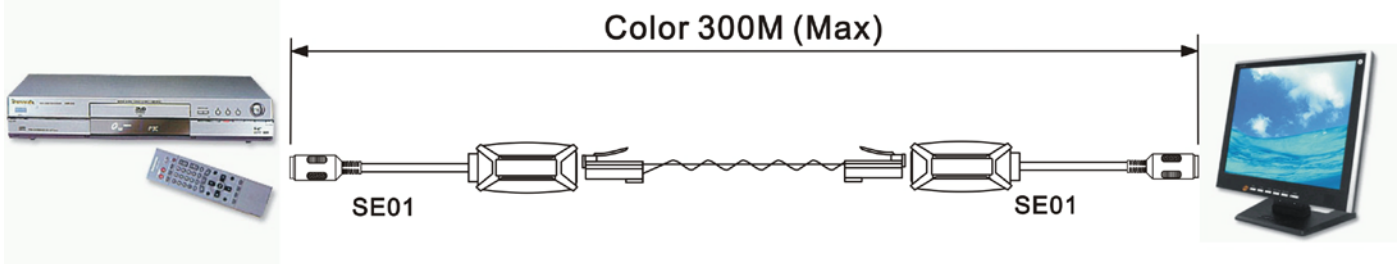

Panel View:

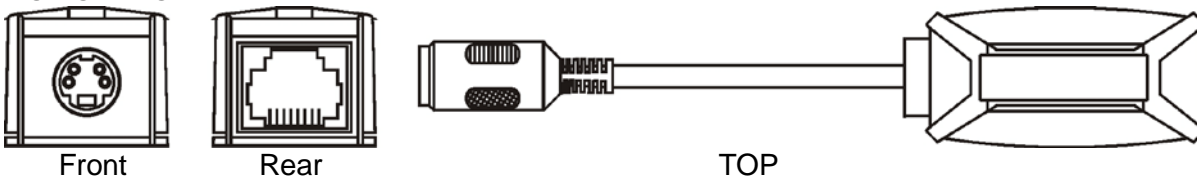

Specification:

ITEM NO.	SE01
VIDEO INPUT / OUTPUT	S-VIDEO x 1
LINK CONNECTOR	RJ45 x 1
BANDWIDTH	Video: DC TO 8Mhz. (480i and 480p only)
TRANSMISSION DISTANCE	Up to 300 meters
CABLE FOR RJ-45	Twisted Pair CAT 5 (AWG24)
DIMENSIONS mm	53 x 25 x 20.7 + 280 mm cable
WEIGHT g	35

