

## Product Specification File

**PN: AFN801**

**Product Type : ADSL Micro Filter**

**Data sheet subject to change without notice**

Head Office 區新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A

<b>Revision</b>	<b>Realized By</b>	<b>Modification Description</b>	<b>Date</b>	<b>Last Pages</b>
<b>A01</b>	<b>Kelvin Huang</b>	<b>New Release</b>	<b>Feb-1-2007</b>	<b>9</b>
<b>A02</b>	<b>Kelvin Huang</b>	<b>Corrected Mechanical</b>	<b>Nov-13-2007</b>	<b>9</b>

**Data sheet subject to change without notice**

2

Head Office 區新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A

## Table of contents

<b>1</b>	<b>Preliminary</b> .....	<b>4</b>
<b>2</b>	<b>Customer reference documents</b> .....	<b>4</b>
<b>3</b>	<b>Standard reference documents</b> .....	<b>4</b>
<b>4</b>	<b>Features</b> .....	<b>4</b>
<b>5</b>	<b>Design requirements</b> .....	<b>5</b>
	5.1 Schematic.....	<b>5</b>
	5.2 Electrical Performance.....	<b>5~7</b>
	5.3 Mechanical.....	<b>8</b>
	5.4 Pin Assignments.....	<b>8</b>
<b>6</b>	<b>Environmental conditions</b> .....	<b>9</b>
	6.1 Resistibility to over voltages and over currents.....	<b>9</b>
	6.2 Climatic conditions.....	<b>9</b>
<b>7</b>	<b>Reliability conditions</b> .....	<b>9</b>
	7.1 Thermal shock.....	<b>9</b>
	7.2. Temperature humidity exposure.....	<b>9</b>
	7.3. Vibration test.....	<b>9</b>
<b>8</b>	<b>Note</b> .....	<b>9</b>

**Data sheet subject to change without notice**

3

Head Office 區新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A

**1 Preliminary:**

**This is a POTS Micro Filter that has been specifically designed to implement the functionality of low pass filter in ADSL over POTS application.**

**2 Customer reference documents:**

**None**

**3 Standard reference documents:**

- ETS 300 001
- ITU-T K21
- ANSI T1E1.4 G.992.2
- 

**4 Features**

- Compact package, includes connectors for ease of installation
- Design for ADSL over POTS Application
- 100 mA DC Loop Current Capacity


**5 Design Requirement**

**Data sheet subject to change without notice**

Head Office 區新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747


(02/2007) Rev A

## 5.1 Schematic

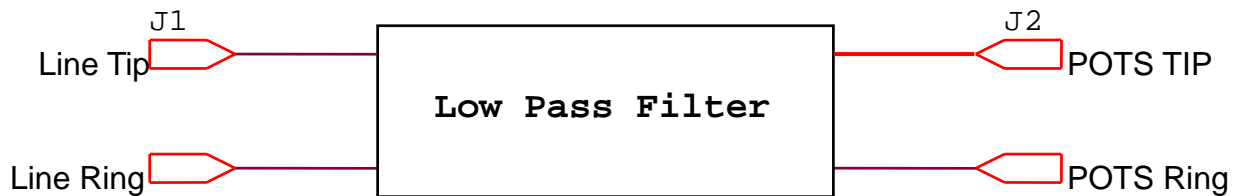

## 5.2 Electrical Performance

### 5.2.1 General conditions

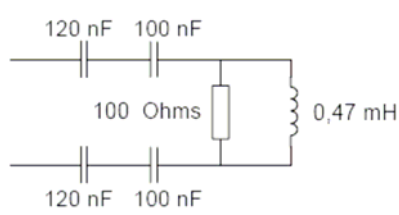General conditions		
	Conditions	Values
Splitter bandwidth		DC-4.0KHz
Voice band		0.3-3.4KHz
Ringing frequency		15.3 Hz to 68 Hz
ADSL band		30KHz ~ 1104KHz
Line Impedance ZL	300 Hz to 3.4 kHz	600 ohms
Modem impedance	30 kHz to 1104KHz	100 ohms
ZADSL	0Hz ~ 4KHz	
Max. operating voltage to ground		250VDC
DC Loop current		<100mA

Data sheet subject to change without notice

5

Head Office 區新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A

### 5.2.2 Electrical Requirement

Electrical Requirement(Reference ETSI Standard)		
DC requirements		
	Conditions	Values
TIP and RING to Earth	100VDC	> 20 MΩ
TIP to RING	100VDC	> 5 MΩ
TIP to RING	POTS port shorted	<50Ω
Voice band loss requirements		
Insertion loss (W/ and W/O Z <sub>ADSL</sub> )	Z <sub>R</sub> / @1004Hz	<1.0 dB
Insertion loss (W/ and W/O Z <sub>ADSL</sub> )	600Ω/ @1004Hz	<1.0 dB
Return loss (POTS and LINE port W/ Z <sub>ADSL</sub> )	300 Hz to 500Hz	>14+(4/200)(f-300) dB
	500Hz to 2.0 kHz	>18 dB
	2kHz to 3.4 kHz	>18-(4/1.4K)(f-2K) dB
Group delay distortion Z <sub>R</sub> & 600 Ω(W/ and W/O Z <sub>ADSL</sub> )	0.6 kHz to 3.2 kHz	< 200 us
	0.2 kHz to 4.0 kHz	< 250 us
Intermodulation distortion Z <sub>R</sub>	2 <sup>nd</sup>	> 57 dB
	3 <sup>rd</sup>	> 60 dB
Unbalance about Earth	50Hz to 600Hz	> 40 dB
	600Hz to 3400Hz	> 46 dB
	3400Hz to 4KHz	>40 dB
	4KHz to 30KHz	> 40 dB
	30KHz to 1104KHz	> 45 dB
	1104K to 2.2MHz	> 30 dB
POTS transient effects		< 2Vp-p, <15KHz
ADSL band requirements		
Stop band attenuation Z <sub>RHF</sub>	30kHz~200kHz	>30dB
	200kHz~2.2MHz	>50dB

Data sheet subject to change without notice

6

Head Office 臨新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A

<b>Electrical Requirement(Reference ITU Standard)</b>		
<b>DC requirements</b>		
	<b>Conditions</b>	<b>Values</b>
TIP and RING to Earth	100VDC	> 5 MΩ
TIP to RING	100VDC	> 5 MΩ
TIP to RING	POTS port shorted	<25Ω
<b>Voice band loss requirements</b>		
Insertion loss	Short Loop/ @1004Hz	<1.0 dB
	Long Loop/ @1004Hz	<0.75 dB
Attenuation distortion	Short Loop/ 0.2-3.4 kHz	+1.5 to -1.5 dB
	Short Loop/ 3.4-4.0 kHz	+2.0 to -2.0 dB
	Long Loop/ 0.2-3.4 kHz	+0.5 to -1.5 dB
	Long Loop/ 3.4-4.0 kHz	+1.0 to -1.5 dB
Return loss	ERL	>6dB
	SRL-L	>3dB
	SRL-H	>3dB
Delay distortion	Short Loop/ 0.6-3.2 kHz	<200 μs
	Short Loop/ 0.2-4.0 kHz	<250 μs
	Long Loop/ 0.6-3.2 kHz	<200 μs
	Long Loop/ 0.2-4.0 kHz	<250 μs
	0.2 kHz to 4.0 kHz	< 250 us
Intermodulation distortion	2 <sup>nd</sup>	> 57 dB
	3 <sup>nd</sup>	> 60 dB
Unbalance about Earth	200 Hz-1 kHz	< 58 dB
	3 kHz	< 53 dB
	4KHz to 30KHz	< 40 dB
	30KHz to 1104KHz	< 45 dB
	1104K to 2.2MHz	< 38 dB
POTS transient effects		< 2Vp-p, <15kHz
<b>ADSL band requirements</b>		
Stop band attenuation	30kHz~200kHz	>30dB
	200kHz~2.2MHz	>50dB
Input impedance	32kHz~2.2MHz	<0.25dB

**Data sheet subject to change without notice**


7

Head Office 亞新生路 248-32 號 5F  
 Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
 Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
 TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A



### 5.3 Mechanical

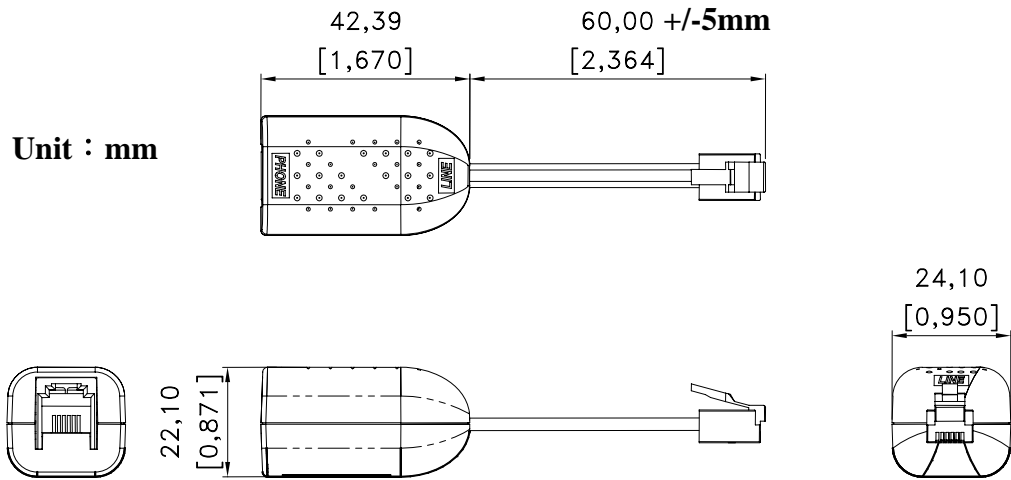

Unless otherwise specified, all tolerances are as following

XXXX.XX +/- 5 mm

XXX.XX +/- 2 mm

XX.XX +/- 1mm

X.XX +/- 0.25 mm

0.XX +/- 0.05 mm

### 5.4 Pin Assignments

Connector	Function	Style	Tip	Ring
J1	Line	RJ11 Plug	Pin3	Pin4
J2	Phone	RJ11 Jack	Pin3	Pin4

**Data sheet subject to change without notice**

Head Office 亞新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A



**6 Environmental conditions:**

## 6.1 Resistibility to over voltages and over currents:

Comply with the resistibility requirements per ITU-T Recommendation K.21 electrical safety requirements

## 6.2 Climatic conditions:

## 6.2a. Operating temperature:

-20 °C to +60 °C

## 6.2b. Storage and transportation:

Low ambient temperature - 40 °C

High ambient temperature +80 °C

## 6.2c. Operation humidity:

0 to 95% (non-condensing)

**7 Reliability conditions:**

## 7.1 Thermal shock:

Temperature from -20 °C to +85 °C for 5 cycles

## 7.2. Temperature humidity exposure:

+50 °C / 95 RH, 96hrs

## 7.3. Vibration test:

Random vibration / Overall: 1.15 g rms

Freq. (Hz): 1 → 4 → 100 → 200

PSD (g<sup>2</sup>/ Hz): 0.0001 → 0.01 → 0.01 → 0.001

Test Axis / Time: Top / 30 mins Bottom / 10 mins

X axis / 10 mins Y axis / 10 mins

**8 Note:****Data sheet subject to change without notice**

Head Office 臨新生路 248-32 號 5F  
Build-B, 5F, No. 248-39, Hsing-Shen Rd., Cheng-Jeng Dist.,  
Lin-Kung Proc. Zone, Kaohsiung, Taiwan, R.O.C.  
TEL:886-7-8153618 Fax:886-7-8150747

(02/2007) Rev A