


VigorSwitch Q1100x

2.5GbE Smart Lite Managed Switch

VigorSwitch Q1100x features 2.5GbE ports for LAN and 10G SFP+ ports for uplink/downlink. When used with WiFi 6 VigorAPs (e.g., VigorAP 905), the VigorSwitch Q1100x delivers full WiFi 6 performance to LAN clients. VigorSwitch Q1100x is a high-performance network switch designed to enhance connectivity and efficiency in business and enterprise environments. Supporting features such as VLAN, Storm Control, Quality of Service and Loop Detection, the VigorSwitch Q1100x is an excellence choice for businesses seeking to maintain a stable, secure, and efficient network infrastructure.

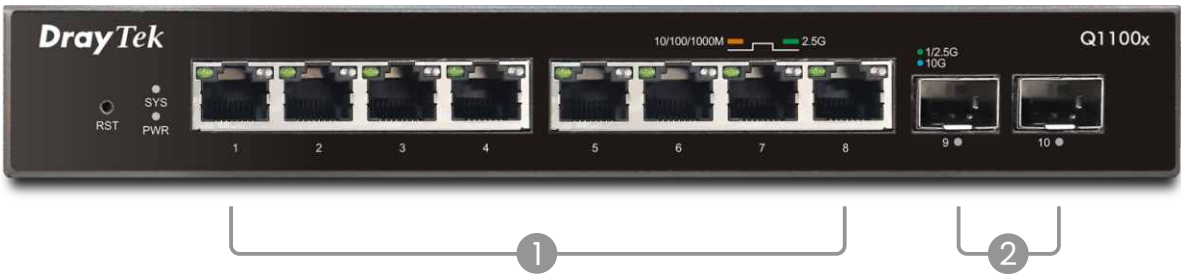

Interface

- 1 8 x 2.5GbE RJ-45
- 2 2 x SFP+ Ports

Performance

Buffer Size (Mbit)	8
Switching Capacity (Gbps)	80
Forwarding Rate (64 bytes)(Mpps)	59.52
MAC Address Table	16k
Jumbo Frame (KB)	10

Standard Compliance

Ethernet Standards	802.3 10Base-T
	802.3u 100Base-T
	802.3ab 1000Base-T
	802.3bz 2.5GBase-T
	IEEE802.3ae 10GBase-X
	802.3x Flow Control
	802.3 Auto-Negotiation
	802.1q Tag-based VLAN
	802.3ad LACP
	802.1AB LLDP
	802.3az EEE

Spanning Tree

STP	•
RSTP	•

VLAN

Max.Number of VLAN	8
VLAN Type	802.1q Tag-based Management

Multicast

IGMP Snooping	v1, v2
MLD Snooping	v1, v2

QoS

Number of QoS Queues	4
Queue Scheduling	SPQ, WRR
CoS (Class of Service)	CoS, DSCP, CoS-DSCP, IP Precedence
Rate Limiting	•

Security

Traffic Control	Storm Control
Loop Protection	•

Management

Local Service	HTTP, HTTPS
Config Backup/Restore	•
Dual Image	•
Access Control	Access List
SNMP	v1, v2c
SNTP (Simple Network Time Protocol)	•
LLDP	•

Physical

Operating Temperature	0 to 45°C
Storage Temperature	-20 to 70°C
Operating Humidity	10 to 90% non-condensing
Storage Humidity	5 to 90% non-condensing